



# HALDEN®

Classification	ASTM F 1700-04 Class III, type A or B Solid Vinyl Floor Tile
Size*	7.25" x 60" / 184.2mm x 1524mm
Overall Thickness*	1/8" / 3.0mm
Wearlayer	20 mil / 0.50mm - Featuring <b>Tuff Shield</b> finish
Edge	Beveled Edge
Standard Colors	4 standard colors
Installation Method	Glue Down
Wear Limited Warranty	Lifetime Residential / 30-Year Commercial
Recycled Content	Contains a minimum of 50% recycled content. 100% recyclable post-use
Packaging	30.25 ft <sup>2</sup> (2.81 m <sup>2</sup> ) per carton 10 pieces per carton 75 cartons per pallet 14 pallets per 20' container
Weight Per Carton	37.09 lbs / 16.82 kg




Canal-HDN 761


Chemical Resistance	ASTM F 925	Passed
Critical Radiant Flux	ASTM E 648-06	Class I, CRF ≥0.45
Dimensional Stability	ASTM F 2199	Passed
+STC Sound Testing	ASTM E 492-09	+STC 61
+IIC Sound Testing	ASTM E 989-06	+IIC 67
Flexibility	ASTM F 137	Passed
Resistance to Heat	ASTM F 1514	Passed
Resistance to Light	ASTM F 1515	Passed
Smoke Density	ASTM E 662-06	Passed
Static Load Limit	ASTM F 970	Passed
Thickness	ASTM F 386	Passed



Canal - HDN 761

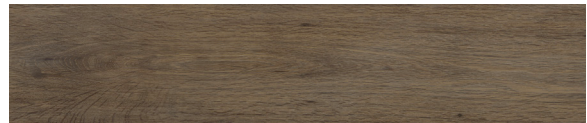

Mainland - HDN 762

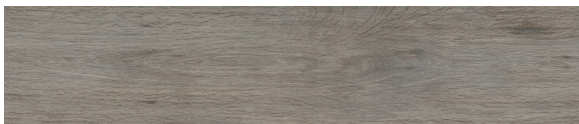

Fortress - HDN 763



Vista - HDN 764

\*All measurements are nominal. +Sound Testing will vary depending on the specific floor/ ceiling assembly.

Please visit [www.earthwerks.com](http://www.earthwerks.com) for full warranty details and installation guidelines. All specifications and offerings subject to change without notice.