

RESPONSIVE 

IMPACT

A BETTER FLOOR

PRESTIGE

SPC FLOORING



UNILIN™ CLICK SYSTEM | PAINTED BEVEL

A BETTER FLOOR

PLANK SIZE: 7" x 60" x 6.50 mm

PRESTIGE

SPC FLOORING

SIZE: 7" x 60"

EDGE FINISH: PAINTED BEVEL

THICKNESS: 6.50 MM

WEAR LAYER: 22 MIL | 0.55 MM

PIECES: 8 PER BOX

COVERAGE: 23.88 SQ FT / 2.22 M² / CARTON

INTERLOCK: UNILIN CLICK SYSTEM

PRESTIGE

SPC FLOORING: UNICLIC / UNIPUSH™ CLICK SYSTEM

SPC FLOORING FOR HEAVY COMMERCIAL USE | PUR Polyurethane Reinforcement | Product Standard PRESTIGE ASTM F3261

CERTIFICATION & CLASSIFICATION	STANDARD	PRESTIGE
TYPE OF FLOOR COVERING	ASTM F3261 EN 16511	RESILIENT FLOORING IN MODULAR FORMAT WITH RIGID CORE (SPC)
CE CERTIFICATION	EN 14041	YES
CLASSIFICATION	EN ISO 10874	HEAVY TRAFFIC : CLASS 34

TECHNICAL CHARACTERISTICS	STANDARDS	PRESTIGE
TOTAL THICKNESS	EN ISO 24336 (EN 428)	6.50 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	22 MIL WL 0.55 MM
SURFACE TREATMENT	UV TREATED	PUR
TOTAL WEIGHT	EN ISO 23997 (EN 430)	2.13 LBS / SQ FT = 10.40 KG / m ²
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) PLANKS IN CARTON	7" X 60" = 23.88 SF / CARTON
		182 mm X 1524 mm = 2.22 m ² / CARTON
	PIECES	8 PIECES PER CARTON
	EDGE FINISH	PAINTED BEVEL

TECHNICAL PERFORMANCES	STANDARDS	PRESTIGE
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	< 0.10%
REACTION TO FIRE	EN 13501 – 1	BFL- S1
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	PASS
FURNITURE LEG	EN 424	NO DAMAGE
CASTOR CHAIR	EN ISO 4918 (EN 425)	NO DAMAGE
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	< 2MM
IMPACT SOUND REDUCTION	EN ISO 140-8 EN ISO 717/2	Δ LNW = 21 DB
LIGHT FASTNESS	EN ISO 105 – B02	> GRADE 6
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	GOOD RESISTANCE PASS
SLIP RESISTANCE	DIN51130 EN 13893	R9 CLASS DS
STATIC LOAD	ASTM F970	PASS



ISO 9001
ISO 14001
ISO 18001




EN 14041







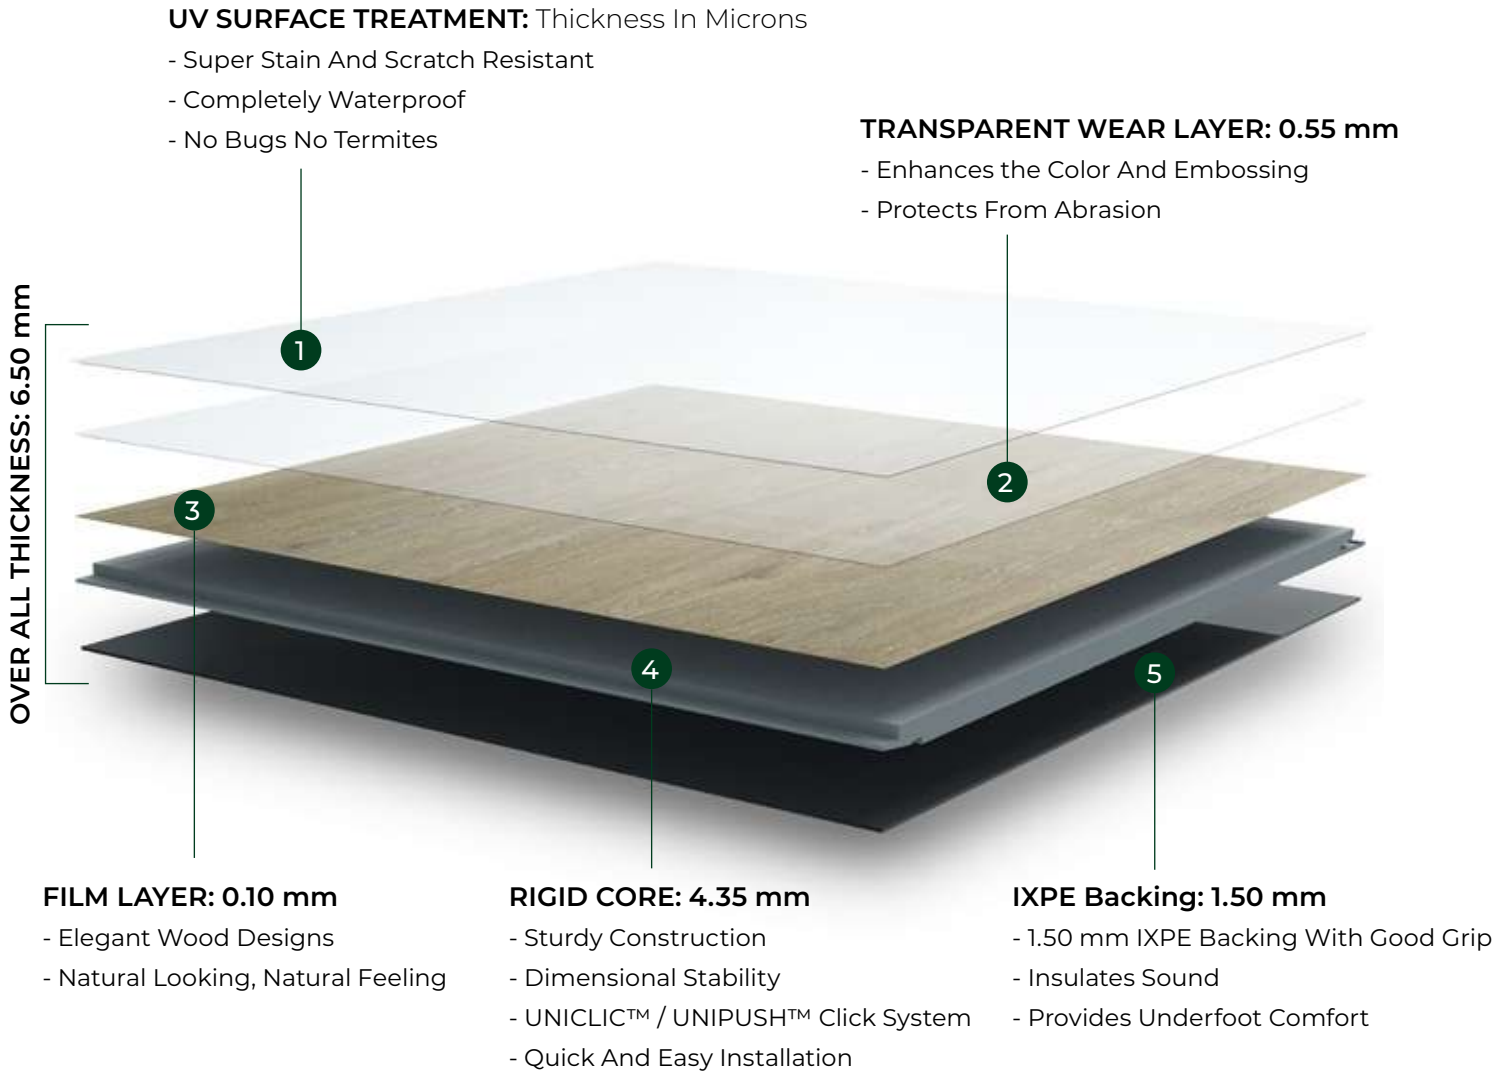







PRESTIGE





SPC FLOORING: UNICLIC / UNIPUSH™ CLICK SYSTEM



FEATURES & BENEFITS

 Superior Scratch & Stain Resistant	 No Bugs & Termites	 Click Installation No Adhesive	 100% Waterproof	 Easy Clean	 Multiple Color Combinations
 Natural Looking Design	 Zero Maintenance	 Superb Dimensional Stability	 Endures Medium Foot Traffic	 Excellent Sound Insulation	 No Sub-Floor Required

APPLICATIONS

 Corporate Offices	 Residential
 Retail	 Hospitality

CHANTICLEER

PRES-01

RESPONSIVE 

IMPACT
A BETTER FLOOR

CHANTICLEER

PRES-01



RESPONSIVE 

IMPACT
A BETTER FLOOR

CHANTICLEER

PRES-01

A



B



C



D



E



F



G



H



I



J



MONTEBELLO

PRES-02

RESPONSIVE 

IMPACT
A BETTER FLOOR

MONTEBELLO

PRES-02



MONTEBELLO

PRES-02

A



B



C



D



E



F



G



H



I



J



ALTA VISTA

PRES-03

RESPONSIVE 

IMPACT
A BETTER FLOOR

ALTA VISTA

PRES-03



RESPONSIVE 

IMPACT
A BETTER FLOOR

ALTA VISTA

PRES-03

A



B



C



D



E



F



G



H



I



J



HAMPTON

PRES-04

RESPONSIVE 

IMPACT
A BETTER FLOOR

HAMPTON

PRES-04



HAMPTON

PRES-04

A



B



C



D



E



F



G



H



I



J



WEST END

PRES-05

RESPONSIVE 

IMPACT
A BETTER FLOOR

WEST END

PRES-05



WEST END

PRES-05

A



B



C



D



E



F



G



H



I



J



OVERBROOK

PRES-06

OVERBROOK

PRES-06



OVERBROOK

PRES-06

A



B



C



D



E



F



G



H



I



J



THORNBLADE

PRES-O7

THORNBLADE
PRES-O7



THORNBLADE

PRES-07

A



B



C



D



E



F



G



H



I



J



STAFFORD WAY

PRES-08

RESPONSIVE 

IMPACT
A BETTER FLOOR

STAFFORD WAY

PRES-08



STAFFORD WAY

PRES-08

A




B



C



D

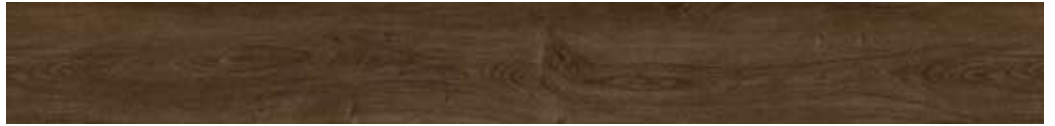

E



F



G



H



I



J

