



REGATTA PLUS XL

Classification	ASTM F 3261-17 Resilient flooring in modular format with Solid Polymeric Core
Size*	9.5" x 60" / 240 mm x 1524 mm (nom)
Overall Thickness*	0.20" / 5 mm (4 mm + 1 mm cushion backing)
Wearlayer	20 mil / 0.50 mm, featuring Tuff Shield finish
Edge	Painted Bevel
Standard Colors	4 standard colors
Installation Method	Angle / Angle
Wear Limited Warranty	Lifetime Residential Wear Limited Warranty / 30-Year Light Commercial Wear Limited Warranty
Recycled Content	This product contains no recycled content. 100% recyclable post-use
Packaging	31.50 ft ² (2.93 m ²) per carton 8 pieces per carton 52 cartons per pallet 14 pallets per 20' container
Weight Per Carton	52.91 lbs / 24.00 kg




Beacon - CVA-359CB

CHEMICAL RESISTANCE	ASTM F 925	Passed
CRITICAL RADIANT FLUX	ASTM E 648-17	Class 1, CRF > 1.13
DIMENSIONAL STABILITY	ISO 23999	Passed
RESIDUAL INDENTATION	ASTM F 1914	Passed
RESISTANCE TO HEAT	ASTM F 1514	Passed
RESISTANCE TO LIGHT	ASTM F 1515	Passed
SMOKE DENSITY	ASTM E 662-15A	Passed
STATIC LOAD LIMIT	ASTM F 970	Passed
SLIP RESISTANCE	ASTM C 1028	Passed
IIC SOUND TESTING	ASTM E 989-06	IIC 61
PHTHALATE CONTENT		None Detected



CVA 357CB - Captain

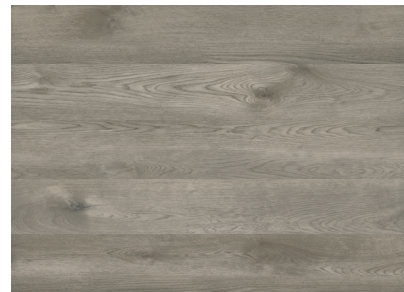

CVA 360CB - Anchor



CVA 359CB - Beacon



CVA 361CB - Sail

*Sound Testing will vary depending on the specific floor/ ceiling assembly. All product measurements are nominal.

Please visit www.earthwerks.com for full warranty details and installation guidelines. All specifications and offerings subject to change without notice.