

MURANO

2 x 17 Wall Ceramic Tiles



MURANO

2 x 17 Wall Ceramic Tiles



Murano OSTRA



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano ERVA



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano Denim



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano CANYON



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano BOSQUE



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano NAVAL



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano VERTI OSTRA



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano VERTI ERVA



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano VERTI Denim



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano VERTI CANYON



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano VERTI BOSQUE



5.3x43 cm | 2"x17"
BR (GLOSSY)

Murano VERTI NAVAL



5.3x43 cm | 2"x17"
BR (GLOSSY)



WALLS



FIRE PROOF



VOC FREE

MURANO

2 x 17 Wall Ceramic Tiles



SIZES AND PACKING

Type / Size	Finish	Rectified	Unit	Work Size	Thick	Faces	Sqft/ Carton	Pieces/ Carton
Wall Tiles 2"x17"	BR Glossy	No	SF	53.5 x 429.5 mm	8.0 mm	40	9.90	40

USAGE RECOMMENDATION

	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (Including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes - Interior (Residential or Commercial)	N/A	✓
Countertops	N/A	
Facades	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	≤ 20%
Breaking Strength	C648	≥ 125 lbf
DCOF WET	ANSI A137.1 ANSI A326.3	N/A
Scratch Hardness	MOHS	3
Frost Resistance	C1026	NO
Chemical Resistance	C650	Class A
Stain Resistance	C1378	Class A

INSTALLATION AND CARE

Grout Joint Recommendation: 1/16"

Shade Variation: V3

Professional tile installation is recommended. For complete installation instructions consult the TCNA Handbook for Ceramic, Glass, and Stone Tile Installation. Follow the grout manufacturer instructions for the complete removal of grout and construction residue from initial installation.

DecorTiles USA recommends using a cloth with water and a neutral cleaner (soap less) or a general household cleaner for wall tiles cleaning.

QUALITY AND SUSTAINABILITY

QUALITY

Standard quality tiles meet or exceed ISO 13006 and ANSI A137.1 standards.

VOC FREE

Ceramic and porcelain tiles are low-emitting materials with zero emission of volatile organic compounds (VOC).

FIRE PROOF

Our ceramic and porcelain tiles are NOT flammable, except mesh material of mesh mounted mosaics.






Murano Erva and Verti Erva



Murano Denim and Verti Denim



Murano Naval and Verti Naval

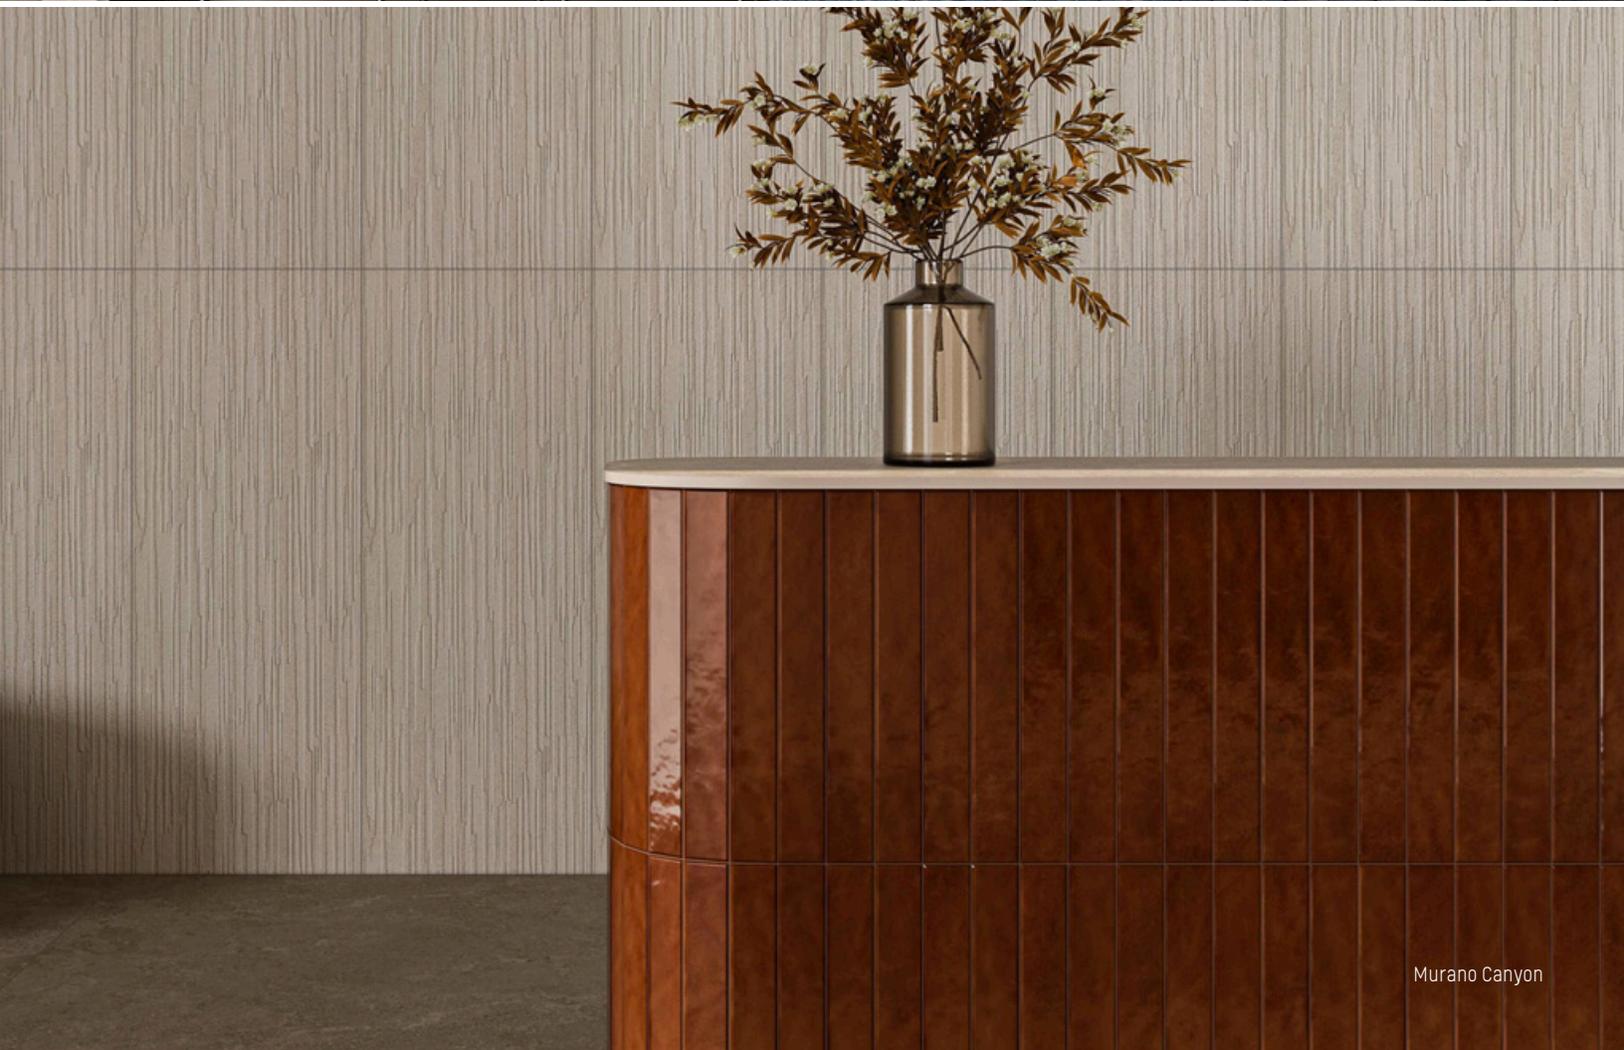

Murano Canyon

