

ICUAS MAGAZINE

State-of-the-art
and recent developments
in unmanned aviation

Editorial Board

EDITOR-IN-CHIEF

Kimon P. Valavanis
kvalavanis@icuas.com

ELECTRONIC SERVICES

Panos A. Valavanis
pvalavanis@icuas.com

ART, PRODUCTION & MEDIA

Nadia Danezou
danezou@icuas.com

Editors

Luis Mejias Alvarez
luis.mejias@qut.edu.au

Elizabeth J. Kaiser
ejjkxck@gmail.com

Hao Liu
liuhao13@buaa.edu.cn

Benjamyn I. Scott
b.i.scott@law.leidenuniv.nl

Alejandro Suarez
asuarezfm@us.es

Contact us:

4550 E. Cherry Creek S. Drive Unit 305
Denver, CO 80246 - USA
Ph: (303) 862-6548 Cell: (303) 718-3097

Kimon P. Valavanis
Founder & President
kvalavanis@icuas.com

Nadia Danezou
Art, Production & Media
danezou@icuas.com



EDITORIAL

Dear colleagues and readers:

The Winter 2024 issue of the *eMagazine* starts with an update about ICUAS 2024 and about the UAV Competition. It also includes information about recent advances and events in unmanned aviation. It then concludes with an informative article entitled "LICAS A1 – Lightweight and Compliant Anthropomorphic Dual Arm System: Applications in Aerial Manipulation".

ICUAS 2024 PROGRESS

In response to the Call for Papers 304 contributed, invited session and poster technical papers have been submitted for review. However the final number will be closer to 310. Regardless, the received number of papers is one of the highest in the history of the conference. To be specific, it is the third highest number of received papers.

ICUAS has earned a spot under the sun. It

is respected and valued. This motivates us to make it even better and more competitive with the aim of accepting the highest quality of submitted papers, which may easily qualify as journal and/or transaction papers. As such, discussions are on the way with leading journals on the subject of the conference to investigate how and under what conditions, and following due process accepted conference papers can be transferred/published as journal papers.

Given that this is an involved process, there will be updates once all details are finalized.

The paper review process has started, and it is expected to be very rigorous and thorough. Results will be announced as planned, without delays.

Moreover, the first set of Workshops / Tutorials has been finalized – some are still under review. All Workshops / Tutorials will be offered on Tuesday, June 4. The currently confirmed list is given next:

- T1: Navigating the Ethical Skies: Community Best Practices for Drones and UAVs
- T2: Modeling and Control of Multirotor UAVs:

A Comprehensive Framework

- T3: Aerial Workers for Infrastructure and Asset Maintenance: The journey from “Lab” to Real World”.

Recall that there will be two Special Issues after the conference: one in the *Journal of Intelligent and Robotic Systems* (Springer), and one in *Drones* (MDPI). The deadline for paper submission is November 30, 2024.

To better assist all authors and participants, a list of Hotels, Resorts, Airbnb, and Room Rentals within the city of Chania and in the greater vicinity is provided in this issue. For all details about logistics, travel, visa requirements, etc., click on www.uasconferences.com

NEWS FROM THE EUROPEAN UNION ABOUT UNMANNED AVIATION

Effective January 1, 2024, all class-certified drones will follow the EASA Open & Specific regulation for open category flying. Details are found at https://834os.r.sp1-brevo.net/mk/mr/sh/SMJz09SDriOHVbOJOruFwG37IMYW/92C_yeh04X5G

EU has announced that, effective January 1, 2024, all UAS (operating in the specific category) must have a Direct Remote Identification (DRI) system. This is required. Details may be found at <https://834os.r.a.d.sendibm1.com/mk/mr/sh/SMJz09SDriOHVbOJOruFwG37IMYW/FdAAtwBUMJUs>

Details about maintenance requirements for UAS regardless of category (all categories) may be found at https://834os.r.a.d.sendibm1.com/mk/mr/sh/SMJz09SDriOHVbOJOruFwG37IMYW/MP13V_AUa5aS It is important to know that it is the UAS operator’s responsibility to make sure that the UAS is in a suitable condition to operate safely.

Information and details concerning the regulatory framework developed by the European Union to manage safe and gradual integration of UAS/RPAS into the airspace may be found by clicking on <https://834os.r.a.d.sendibm1.com/mk/mr/sh/SMJz09SDriOHVbOJOruFwG37IMYW/tINT-1QEznka> This report focuses on design, manufacture, and operational standards specifics for different classes of UAS.

An interesting report has been published that presents the differences between Geocaging and Geofencing. Both are important safety measures for responsible and safe UAS flight operations mitigating hazards. It is important to know the different types of safety measures, what does Geofencing and Geocaging mean, and how technology and regulations may be combined. Details may be found at <https://834os.r.a.d.sendibm1.com/mk/mr/sh/SMJz09SDriOHVbOJOruFwG37IMYW/OnXtQVa7wF5A>


UAV COMPETITION

DR. FRANO PETRIC, UNIVERSITY OF ZAGREB

The ICUAS'24 UAV Competition scenario centers around yield estimation in agriculture. At first, thirty-six (36) teams expressed their interest in participating. These 36 teams are from Bangladesh, Brazil, Canada, China and Hong Kong, France, Greece, India, Italy, Mexico, Pakistan, Poland, Russia, Slovakia, South Korea, Spain, Turkey, and USA. Twenty-four (24) competing teams submitted their proof-of-concept ideas by 20 January 2024. These teams are, at random order, AIRO Lab (The Hong Kong Polytechnic University), ITUAV (Istanbul Technical University), AVANT-UFGM (Universidade Federal de Minas Gerais), AVADER AGH (AGH University of Krakow), UMIC (Indian Institute of Technology Bombay), SDCNLab (York University), UniboUAV (University of Bologna), AeroMIT (Manipal Institute of Technology), UoP (University of Patras), Skoltech Hawks (Skolkovo Institute of Science and Technology), Aerial Robotics IITK (Indian Institute of Technology (IIT) Kanpur), high_figh_fly (Jahangirnagar University), ASL (Ulsan National Institute of Science & Technology), Aerial Robotics Kharagpur (Indian Institute of Technology (IIT) Kharagpur), FeikAir (Slovak University of Technology in Bratislava), UAS-DTU (Delhi Technological University), CVAR (Universidad Politécnica de Madrid, Escuela Técnica Superior Ingenieros Industriales ETSII), TeamHawkeye (Bangladesh University of Engineering and Technology), LCIS (LCIS: Laboratoire de Conception et d' Integration des Systemes), Sandrone (Scuola Superiore Sant'Anna), BDP Fly (Universidade Federal de Viçosa), CopyBots (Universidade Federal da Paraíba), percepDrone (Sejong University), Democritus Mechatronics & Automation – DMA (Democritus University of Thrace).


The simulation stage is in full swing, and several solutions have already been received. The 'fruit-counting effort' will conclude with the teams' final submission on February 23, 2024.

Then, the UAV Competition Committee, along with the Organizing Committee will evaluate the submitted solutions, and the list of finalists will be announced.

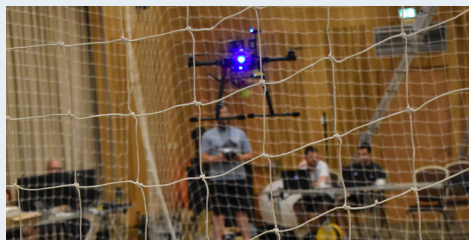

ICUAS'22/ Dubrovnik

Five teams participated in the finals. Their goal was to score points by throwing balls in the basket with a drone. The teams had to solve several challenging problems of computer vision, trajectory planning and navigation.



ICUAS'23/ Warsaw

A competition challenge was to first estimate the pose of the quadrotor UAV using only IMU and Realsense camera, then, navigate autonomously within the arena the layout of which was unknown, and finally detect defects in the concrete settings.

LICAS A1 - LIGHTWEIGHT AND COMPLIANT ANTHROPOMORPHIC DUAL ARM SYSTEM: APPLICATIONS IN AERIAL MANIPULATION

ALEJANDRO SUAREZ, GUILLERMO HEREDIA, ANIBAL OLLERO

GRVC Robotics Lab, University of Seville, Spain

asuarezfm@us.es ; guiller@us.es ; aollero@us.es

Dual arm aerial manipulation robots have been a topic of research for ten years, from the mechatronics, control, and application point of view, motivated by the convenience of replicating the skills of human operators to perform in high altitude workspaces certain operations that cannot be conducted by other means. This paper presents the LiCAS A1, the Lightweight and Compliant Anthropomorphic Dual Arm System Model 1, a platform designed at the University of Seville derived from the research work developed in the context of previous European projects in aerial manipulation. The refinement and improvement in the manufacturing procedure of the LiCAS arms, along with the extensive experimental evaluation with previous prototypes, has allowed us to obtain a customizable dexterous manipulator that has served as research platform for several projects, demonstrating its use for the installation of bird flight diverters on power lines as part of the AERIAL-CORE project, or in aerial parcel delivery in the context of the euROBIN project. The paper presents the main features of these arms, and describes several practical aspects in the mentioned applications.

1. INTRODUCTION

Aerial robotic manipulation [1], that is, the combination of flying platforms with some kind of mechanism that allows to perform physical interactions with the environment, has consolidated during the past decade as a solid research topic that, nowadays, is reaching relevant application domains, like the inspection and maintenance of infrastructures such as power lines, pipelines, viaducts, bridges or tunnels, among many others. Although the first papers presenting this concept in the form of quadcopter or unmanned helicopter equipped with grippers are from early 2010, the idea of using flying robots to perform the grasping and transportation of objects was demonstrated back in the 90's with the International Aerial Robotics Competition [2]. The concept of an aerial manipulator as an aerial platform equipped with a robotic arm providing a higher level of dexterity than a simple gripper was introduced in 2011 with the ARCAS (Aerial Robotics Cooperative

Assembly System) European project, which merged the field of UAVs (Unmanned Aerial Vehicles) with the space robotic manipulation field, popular in the past. Diverse designs and prototypes have been proposed since then, as collected in [1], comprising diverse configurations for the aerial platform (multi-rotors in most cases [3]), and for the manipulator [1], which may be a gripper, a simple link, linear actuators or delta manipulators, multi-joint robotic arms, multi-arm systems, long-reach or cable suspended manipulators, or even the body of the aerial platform may become the manipulator itself [4]. Besides the design and mechatronic aspects, significant effort has been devoted to the modelling and control, perception, planning, and teleoperation of the aerial manipulation robots [1], non-trivial problems due to the dynamic coupling between the aerial platform and the manipulator, along with the important payload constraints that result in significant technological challenges.

The development of this research field in Europe has been mainly possible through funding from the European Commission for research and innovation projects from the FP7 and H2020 frameworks, starting in 2011 with ARCAS (6 M€), followed by AEROARMS in 2014 (4.7 M€), HYFLIERS in 2017 (3.9 M€), and more recently PILOTING (8.2 M€) and the very successful AERIAL-CORE (8.6 M€) project, both starting in 2019. More generally, the interest and impact of the aerial manipulation field in the scientific community can be evidenced for example from the statistics provided by SCOPUS.

Within the wide variety of manipulators that have been proposed for their integration in multi-rotors, dual arm manipulators [5][6][7] represented a significant advance in terms of dexterity and capabilities with respect to a single robotic arm or other simpler mechanisms like grippers. A dual arm system allows for replicating the dexterous manipulation skills of humans when the aerial robot is intended to perform maintenance tasks in high altitude workspaces, removing the risk for the human workers. Roughly speaking, an aerial manipulator may perform two types of operations: those involving positioning the end effector at a desired point, for

example for object grasping, and those for exerting forces/moments at a certain point. Although a simple gripper or a simple rigid bar attached to the multi-rotor frame may accomplish this goal by relying on the appropriate position [8] or wrench [9] control of the aerial platform, without increasing the complexity or weight of the system, the purpose of the arms is to increase the dexterity in the realization of the manipulation task in several senses: by compensating position deviations of the aerial platform, by accessing the point of interest with certain poses, allowing the rotation of the object once grasped, using one arm for grabbing and stabilizing the platform while the other conducts the task.

In a similar way to what occurred with multi-rotors and UAVs (Unmanned Aerial Vehicles) during last years, it is expected that dexterous aerial manipulators evolve from research prototypes to become a consolidated technology with higher technology readiness level (TRL), supporting new research and application domains. This motivated the LiCAS Robotic Arms initiative started in 2020 with the aim of manufacturing a reliable and cost effective dual arm manipulator that exploits the benefits of the lightweight and compliant robots.

2. MECHATRONIC DESIGN

The Lightweight and Compliant Anthropomorphic Dual Arm System Model 1 (LiCAS A1), shown in Figure 1, is an evolution of the dual arm prototypes developed in our previous works [5][7] for aerial robotic manipulation in the context of the AEROARMS project, motivated by the necessity to provide dexterous manipulation capabilities to multi-rotors with limited payload capacity. Note that the integration of “lightweight” industrial manipulators like the KUKA LBR iiwa (24 kg weight) required an

unmanned helicopter for its operation on flight [10], with the associated complexity and risk of operation due to the size and weight of the vehicle.

The LiCAS A1, derived from the LiCAS Robotic Arms initiative [11] funded by the regional government of the Junta Andalucía in Spain, follows the design principles established in [5][7]:

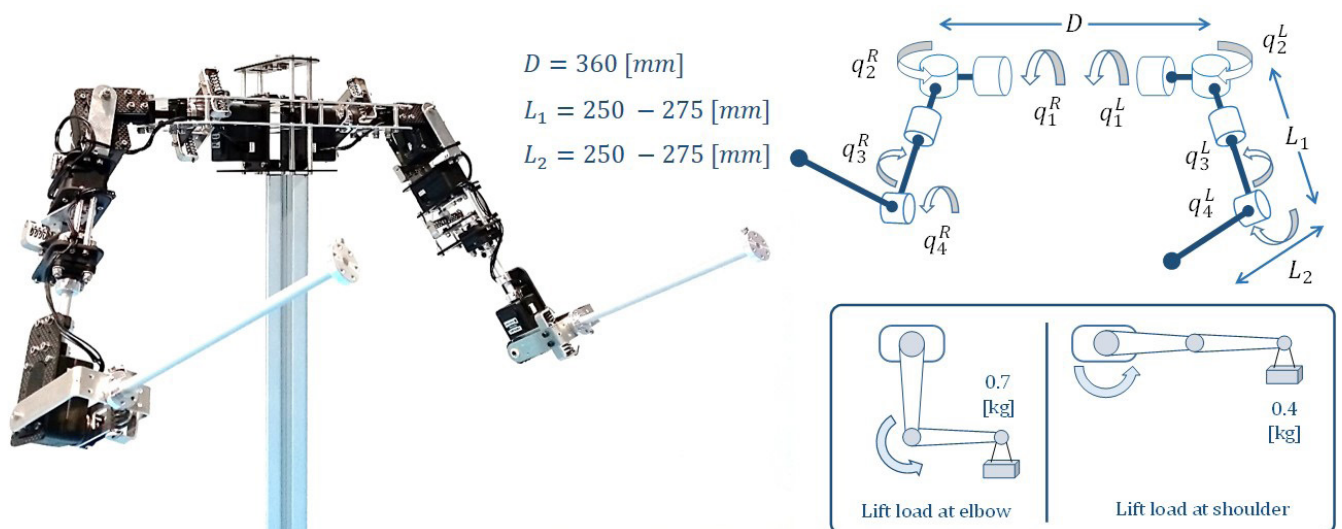


Figure 1

LiCAS A1 (left), kinematic configuration with 4-DOFs for end effector positioning (right-up) and maximum payload capacity at elbow and shoulder joints (right-down).

VERY LOW WEIGHT (2.5 KG)

The main design requirement for the arms is to reduce by one order of magnitude their weight compared to conventional commercial manipulators so they can be integrated into medium scale multi-rotor platforms like the DJI Matrice 600 [6], relying on a carefully designed aluminium and carbon fibre frame structure that supports the Herkulex smart servo actuators (DRS-0402 and DRS-0602) of the joints, while providing high rigidity and low aerodynamic profile, convenient for the long reach [12] or cable suspended [13] configurations in order

to avoid perturbations caused by wind. It is not only the weight of the manipulator itself, but conventional industrial robotic arms also require relatively heavy and voluminous controllers and power supplies that are not suitable for aerial platforms. Related to its weight, the payload capacity of the LiCAS A1 is defined as the lift load benchmark represented in Figure 1, considering the maximum load at the elbow (0.7 kg) and shoulder (0.4 kg) that may be lifted and hold for at least 10 seconds.

MECHANICAL JOINT COMPLIANCE (5 - 20 NM/RAD)

The incorporation in all the joints of the arms of a spring-lever mechanism that transmits the torque of the servo actuators to the output links has been proven to be an effective feature in extending the robustness, sensing capacity, and ability of accommodation of the arms when these are exposed to uncertain physical interactions with the environment, even more, when the arms are operating on flight [5][12][14]. The natural damping and elasticity of the compression springs is exploited for filtering mechanically force peaks and accommodating

passively the arms to overloads that, if rigidly transmitted to the actuators, might damage the gearbox. This passive compliance becomes particularly useful in bimanual manipulation tasks or in grabbing situations in which the stability and integrity of the aerial platform, the environment, or the manipulator itself may be severely affected if there is no accommodation to the generated wrenches. Table I collects the main specifications of the four joints of the arms, including the stiffness.

Table 1
Mechanical specifications of the shoulder and elbow joint of the LiCAS A1.

| Joint | 1 | 2 | 3 | 4 |
|----------------------------|---------------------|-----------------------|-----------------------|---------------------|
| Designation | Shoulder pitch | Shoulder roll | Shoulder yaw | Elbow pitch |
| Motion | Flexion / Extension | Abduction / Adduction | Medial / Lateral Rot. | Flexion / Extension |
| Rotation range [°] | ±90 | [-15, 90] | ±90 | ±150 |
| Max. speed [°/s] | 250 | 250 | 250 | 250 |
| Max. deflection [°] | 10 | 15 | 15 | 15 |
| Stiffness [Nm/rad] | 15 | 10 | 5 | 10 |

HUMAN-LIKE AND HUMAN-SIZE (500 MM REACH)

The anthropomorphic kinematics of the LiCAS A1, with three joints at the shoulder and one at the elbow, along with its dimensions (250 mm forearm and upper arm, 360 mm between left and right arms), makes it easy and intuitive to replicate the motion of human operators in the realization of tasks requiring a certain level of dexterity, like the installation of bird flight diverters on power lines as considered in the AERIAL-CORE project [12][13]. Figure 2 shows the frame structure of the arms, with the shoulder structure that integrates the actuators for the flexion/extension motion, the upper arm structure

supported by the actuators that perform the adduction/abduction rotation, followed by the medial/lateral rotation servo, and the elbow joint actuator. The forearm is a simple aluminium link with a Pololu universal mounting hub (8 mm diameter, M3 screws) at the tip, used as flange for the end effector. Minimizing the weigh at the forearm and at the end effector is highly desirable to avoid reducing the effective payload of the arms and increase the inertia, taking into account that the deflection of the joints due to the gravity effect affects the positioning accuracy of the end effector.

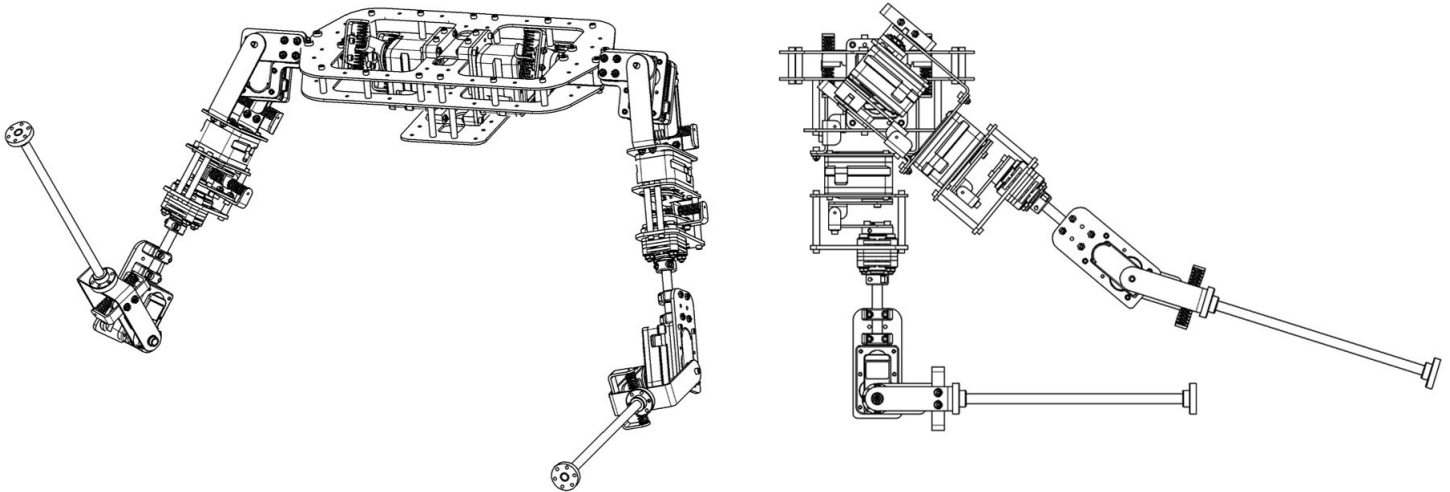


Figure 2

Two views of the LiCAS A1 design, showing the shoulder structure and the left and right arms, with a flange at the wrist point for integrating the end effector. The LiCAS A1 is a registered Community design (RCD).

Unlike the prototypes in [5][6], the A1 model increases the Technology Readiness Level (TLR) in several ways. On the one hand, this model is intended to be a product rather than a prototype, in the sense that the design and manufacturing procedure is refined to reduce the assembly time, and increase the torque capacity and positioning accuracy by reducing the misalignments and clearance in the coupling between the shaft of the servo actuators and the output links through the spring-lever transmission. The structure of the arms is designed to provide a certain level of customization and facilitate its

transportation, deployment and integration in aerial or ground platforms. On the other hand, the LiCAS A1 aims to serve as a multi-purpose manipulator for different tasks and applications by exploiting its features, as indicated before. An extensively tested software architecture in C/C++ makes it fast and easy its integration into any computer board since it relies only on standard libraries, implementing the low level communications with the servo actuators, following an object-oriented approach for organizing the source code.

3. APPLICATIONS

This section presents the application of the LiCAS A1 dual arm in four experiments developed in the context of the AERIAL-CORE and euROBIN projects.

3.1. INSTALLATION OF BIRD DIVERTERS ON POWER LINES

A customized version of the LiCAS A1 was developed for the AERIAL-CORE project to perform the installation of bird flight diverters on power lines, using a multi-rotor for its transportation, deployment and retrieval as demonstrated in the video [17]. Bird diverters are visual markers installed on power lines (imposed by regulations in many countries to protect avian species) to prevent the collision or electrocution of birds. The installation of this kind of devices involves significant costs for the companies due to the huge extension of the power grid and considerable risk for human workers due to the high altitude and high voltage of the power lines.

In order to overcome the limited flight time and low positioning accuracy of aerial manipulators flying outdoors, the proposed concept consists in deploying the robot on the power line using the multi-rotor,

detaching the arms from the aerial platform when the base of the manipulator rests on the line. To implement this, the robot, depicted in Figure 3, incorporates three main modifications with respect to the standard design of the LiCAS A1: a rolling base driven by a servo actuator that allows the arms to perch and move along the cable with high energy efficiency, a magnetic gripper used to grasp and install the bird diverters stored in a linear array under the shoulder structure of the arms, and a hook-handle mechanism used to detach and retrieve the arms from the aerial platform.

Several successful demonstrations were carried out in a section of power line close to the ATLAS Flight Center in Villacarrillo (Jaen, Spain), remarking the fast deployment time from the take-off area (less than two minutes), fast installation of the devices (around 20 seconds per device, with 5 meters separation), and the low impact on the power line, since the very low weight of the arms does

not cause significant deflection of the cable. The video of the first demonstration on May 2023 can be seen in [17].



Figure 3
LiCAS dual arm rolling robot developed for the AERIAL-CORE project to perform the installation of bird flight diverters on power lines. The aerial transportation and retrieval of the arms is done using a multi-rotor through a hook-handle mechanism.

3.2. CABLE SUSPENDED DUAL ARM AERIAL MANIPULATION

As part of the AERIAL-CORE project, it was also explored the use of aerial manipulators in cable suspended configuration motivated by the convenience of insulating electrically the multi-rotor from the arms to prevent the electrostatic discharge raised when interacting with high voltage power lines, which could cause a platform fault and crash, as identified experimentally in [18]. Not only that, but long reach [12] and cable suspended aerial manipulators [13][19] also increase safety and reduce the risk of collisions by increasing the separation distance between the multi-rotor propellers and the environmental obstacles, the power lines in this case.

Some devices like the helical bird flight diverters extensively employed on the Spanish power grid and in other countries [15] require dexterous manipulation capabilities for their installation. Note that the realization of maintenance operations like this has been traditionally carried out by human workers, either climbing the power

line, from elevated working platforms, or using manned helicopters to reach the workspace. Therefore, taking benefit of the human-like and human-size features of the LiCAS A1, the arms have been integrated into a multi-rotor to perform preliminary tests and evaluate the feasibility of conducting manipulation tasks on flight using this cable suspended configuration. Figure 4 shows the take-off manoeuvre carried out by a human pilot while the arms grab a helical bird diverter. Several practical aspects were derived from these tests. First, it is convenient that the length of the cables (employing harnesses rope for this purpose) is around one meter since too short cables tend to induce undesired oscillations that are more difficult to damp, whereas too long cables tend to reduce the positioning accuracy in the coordinated control of both aerial platform and multi-rotor. The length of the cable should also be enough to facilitate the multi-rotor take-off and landing taking into account the height of the landing gear. Second, before the take-off, the arms should be separated from the aerial platform so the cables are slightly stretched to prevent

them from tangling. The torque control of the dual arm joints should be disabled so the pose of the arms is passively accommodated to the floor as the arms are lifted. Third, unlike previous works, a 4-Cable Suspended configuration is adopted to prevent the shoulder structure is tilted when the arms rotate forwards. If the center of mass of the arms is within the area defined by the four anchor points of the cables, then the reaction wrenches will not induce rotations in roll or pitch. Finally, experiments reveal that the aerial platform tends to damp oscillations relatively fast (in less than 4 seconds) thanks

to the action of the cascade position controller and the aerodynamic damping that dissipates the kinetic energy of the suspended manipulator.

The modelling and control of dual-arm cable suspended aerial manipulators is still an open topic of interest for the robotics research community. Recently, a method for modelling, identification and simulation of this kind of platform was reported in [20], presenting experimental results with the LiCAS A1 along with the CRANEbot system at CERN.

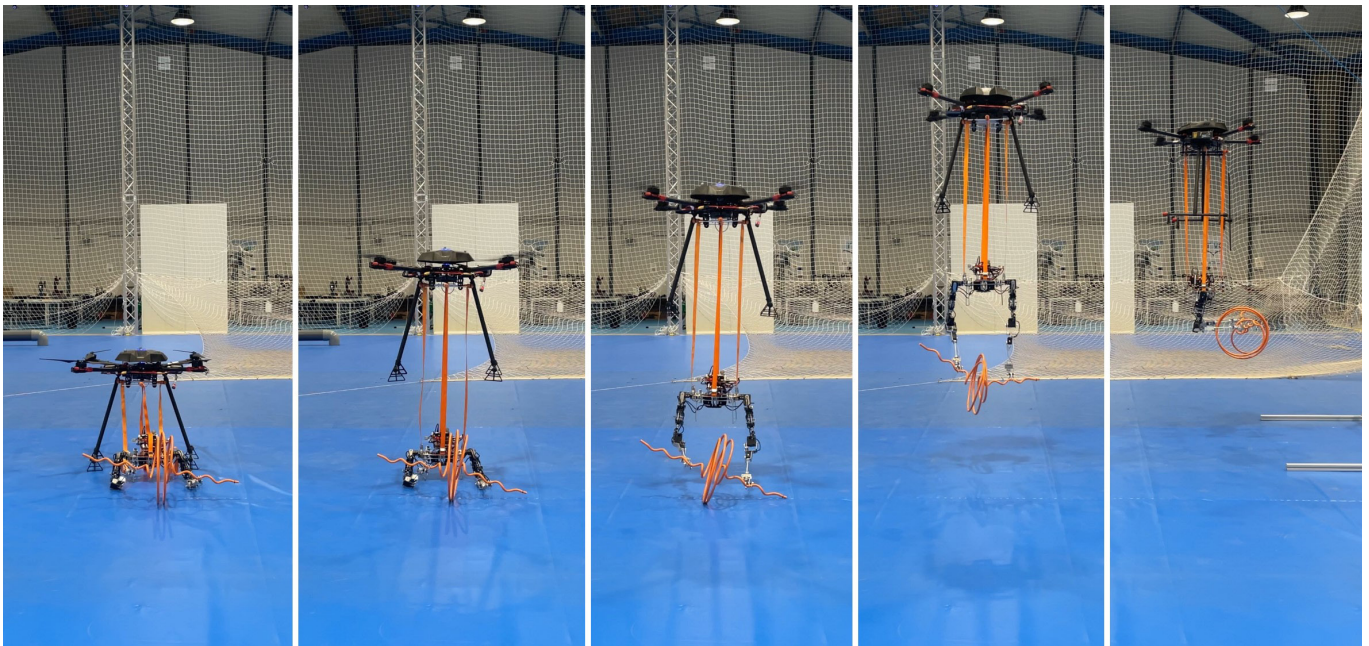


Figure 4 Sequence of images showing the take-off phase of the LiCAS A1 integrated in the multi-robot in the 4-Cable Suspended configuration while grasping a helical bird flight diverter.

3.3. AERIAL PARCEL GRASPING AND DROP

One of the application domains of the European Robotics and AI Network (euROBIN project) is the use of outdoor robots for sustainable communities, considering the delivery of parcels as a representative use case, involving aerial, legged, and wheeled-legged robots to explore different approaches according to the locomotion capabilities of each kind of platform.

During the celebration of the euROBIN Seville Event on 15-19 May 2023, the robotics hackathon that took place at the GRVC Aerial Robotics indoor testbed brought together eight robots from several European research centers [21]. The video of the final demonstration of the event can be seen in [22]. In this case, the LiCAS A1 was used to conduct on flight the grasping of a standard parcel (DHL express, size 4) provided by the Centauro robot [23], dropping then the parcel on a box carried by the Swiss-Mile wheeled-legged robot [24]. Since

these two operations required significant positioning accuracy, the arms were integrated at the base of the multi-robot instead of considering the cable suspended configuration, retracting the landing gear to prevent the collision with the robots during the handover. For this experiment, the arms were tele-operated using a pair of LiCAS robots in leader-follower configuration as described in [25]. As it can be seen on Figure 5, the arms are installed around 15 cm backwards with respect to the center of mass of the multi-robot to compensate the mass unbalance caused when the parcel (weighting 0.5 kg) is grasped. The mechanical joint compliance of the LiCAS A1 is particularly useful here to accommodate passively the pose of the arms during the physical interactions raised during the aerial handover and the parcel drop, reducing in this way the perturbations exerted on the multi-robot while flying. The human-size and anthropomorphic kinematics of the arms also contributes to make the operation easy and intuitive for the human operator.

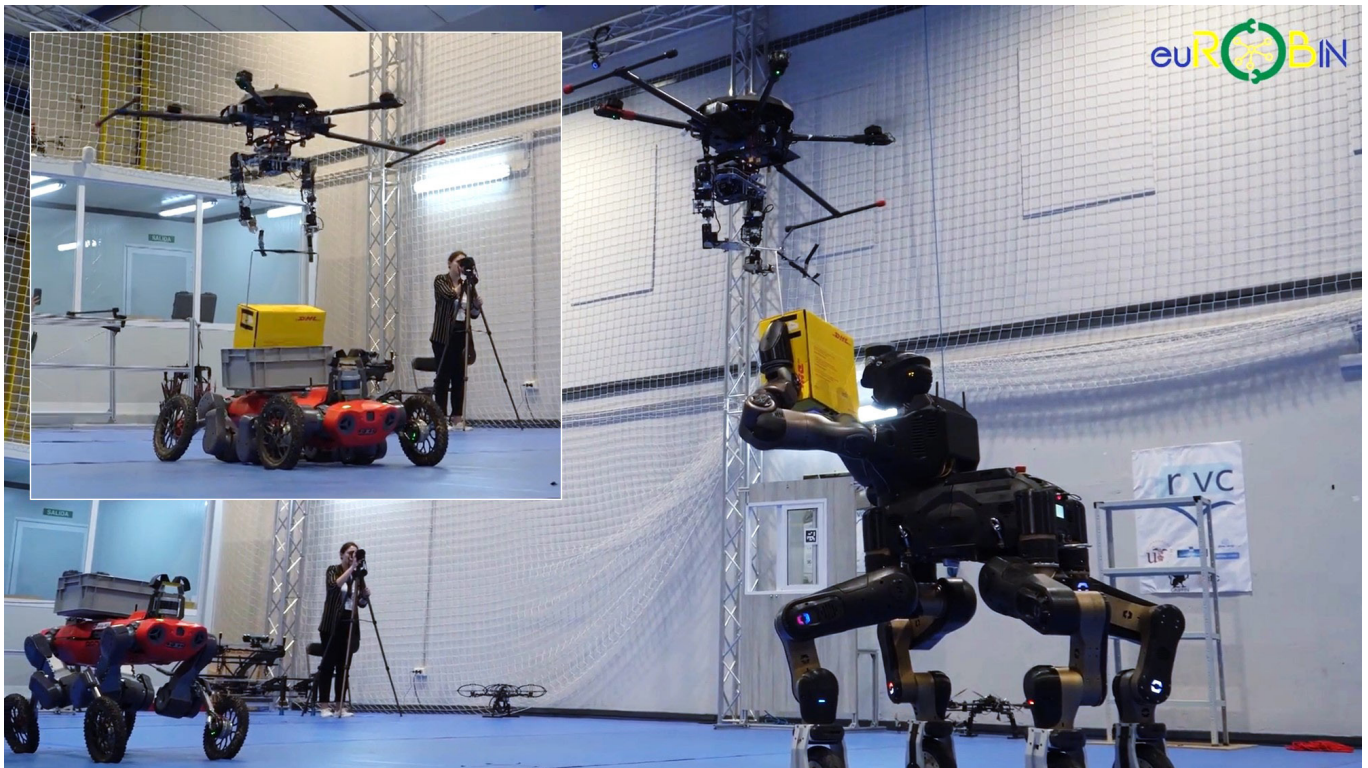


Figure 5
LiCAS A1 integrated on a multi-rotor platform conducting the aerial handover with the CentauRO robot from the Istituto Italiano di Tecnologia (IIT) and the parcel drop on the Swiss-Mile wheeled-legged quadruped.

3.4. IN-FLIGHT PARCEL LOAD FOR DELIVERY WITH DRONES

Although the term “aerial manipulation” usually refers to the realization of manipulation tasks on flight from an aerial platform, with the arms integrated in the multi-rotor, a different concept was explored also in the context of the euROBIN project, inspired on the parcel delivery problem represented in Figure 6. Here the LiCAS A1 is supported by a fixed-base structure

and used to load a small parcel in the front basket of a delivery drone. The mechanical features of the arms, along with their low cost compared to industrial manipulators, result particularly suitable for logistics tasks involving the manipulation of light loads. In this experiment, the flexibility of the arms facilitates the passive accommodation of the multi-rotor during the parcel drop, so the LiCAS “helps” the attitude controller to adapt to the exerted payload mass.

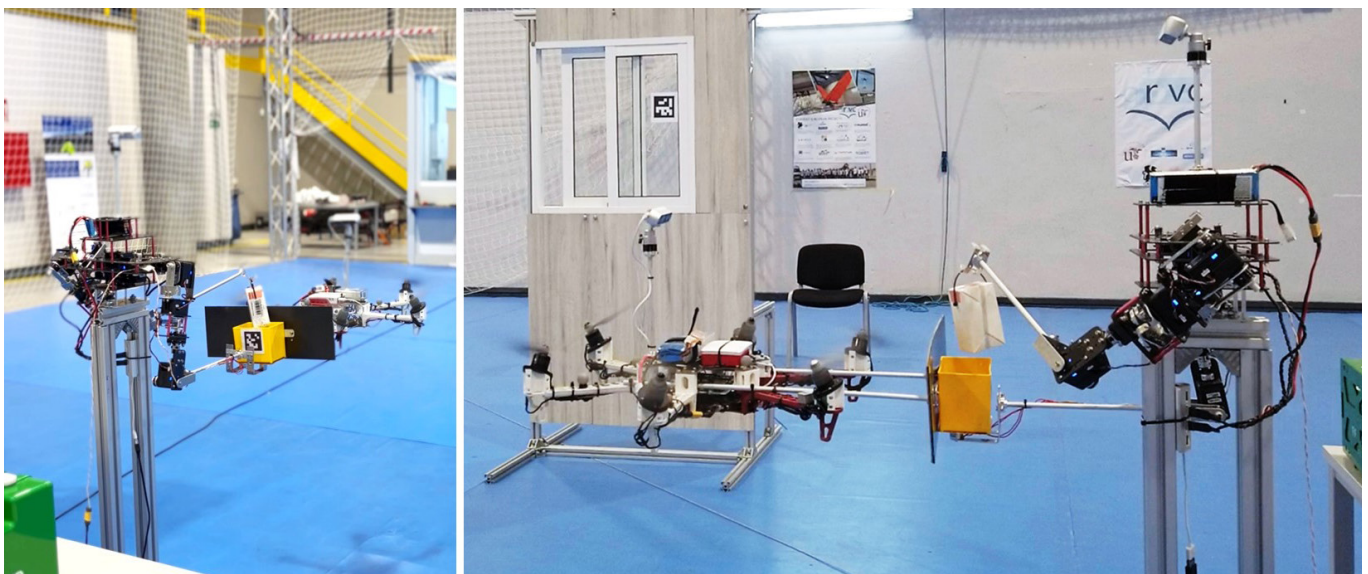


Figure 6
LiCAS A1 holding a multi-rotor while dropping a parcel in the front basket carried by the aerial platform.

CONCLUSION

The Lightweight and Compliant Anthropomorphic Dual Arm System Model 1 (LiCAS A1) is the result of five years of research in dexterous aerial manipulation carried out at the University of Seville, leading to the development of a reliable robotic platform that has been and it is currently being used in several research projects (European, national, and with companies). Its very low weight (2.5 kg), human-size and human-like features, and the mechanical joint compliance that enhances safety, makes these robotic arms suitable for fast integration and deployment in aerial robotics applications, being a cost effective solution compared to industrial manipulators. The paper presented some applications of this dual arm system, including practical aspects and research topics to be explored.

ACKNOWLEDGEMENT

This work has been funded by the European Commission through the European ROBotics and AI Network (euROBIN, Grant agreement ID: 101070596), and through the AERIAL COgnitive integrated multi-task Robotic system with Extended operation range and safety (AERIAL-CORE, Grant agreement ID: 871479) project.

REFERENCES

1. A. Ollero, M. Tognon, A. Suarez, D. Lee and A. Franchi, "Past, Present, and Future of Aerial Robotic Manipulators," in *IEEE Transactions on Robotics*, vol. 38, no. 1, pp. 626-645, Feb. 2022.
2. International Aerial Robotics Competition webpage: <http://www.aerialroboticscompetition.org/mission1.php>
3. M. Hamandi, F. Usai, Q. Sablé, N. Staub, M. Tognon, A. Franchi, "Design of multirotor aerial vehicles: A taxonomy based on input allocation," *The International Journal of Robotics Research*, vol. 40(8-9), pp. 1015-1044, 2021.
4. M. Zhao, K. Kawasaki, X. Chen, S. Noda, K. Okada and M. Inaba, "Whole-body aerial manipulation by transformable multirotor with two-dimensional multilinks," 2017 IEEE International Conference on Robotics and Automation (ICRA), Singapore, 2017, pp. 5175-5182.
5. A. Suarez, G. Heredia and A. Ollero, "Design of an Anthropomorphic, Compliant, and Lightweight Dual Arm for Aerial Manipulation," in *IEEE Access*, vol. 6, pp. 29173-29189, 2018.
6. M. Orsag, C. Korpela, S. Bogdan and P. Oh, "Valve turning using a dual-arm aerial manipulator," 2014 International Conference on Unmanned Aircraft Systems (ICUAS), Orlando, FL, USA, 2014, pp. 836-841.
7. A. Suarez, A. E. Jimenez-Cano, V. M. Vega, G. Heredia, A. Rodriguez-Castaño, and A. Ollero, "Design of a lightweight dual arm system for aerial manipulation," in *Mechatronics*, vol. 50, pp. 30-48, 2018.
8. T. P. Nascimento, M. Saska, "Position and attitude control of multi-rotor aerial vehicles: A survey," in *Annual Reviews in Control*, vol. 48, pp. 129-146, 2019.
9. S. Park et al., "ODAR: Aerial Manipulation Platform Enabling Omnidirectional Wrench Generation," in *IEEE/ASME Transactions on Mechatronics*, vol. 23, no. 4, pp. 1907-1918, Aug. 2018.
10. K. Kondak et al., "Aerial manipulation robot composed of an autonomous helicopter and a 7 degrees of freedom industrial manipulator," 2014 IEEE International Conference on Robotics and Automation (ICRA), Hong Kong, China, 2014, pp. 2107-2112.
11. LiCAS Robotic Arms webpage (accessed 27/01/2024): <https://licas-robotic-arms.com/>
12. A. Suarez, F. Real, V. M. Vega, G. Heredia, A. Rodriguez-Castaño and A. Ollero, "Compliant Bimanual Aerial Manipulation: Standard and Long Reach Configurations," in *IEEE Access*, vol. 8, pp. 88844-88865, 2020.
13. Y. S. Sarkisov et al., "Development of SAM: cable-Suspended Aerial Manipulator," 2019 International Conference on Robotics and Automation (ICRA), Montreal, QC, Canada, 2019, pp. 5323-5329.
14. A. Suarez, G. Heredia and A. Ollero, "Physical-Virtual Impedance Control in Ultralightweight and Compliant Dual-Arm Aerial Manipulators," in *IEEE Robotics and Automation Letters*, vol. 3, no. 3, pp. 2553-2560, July 2018.
15. J. Cacace, S. M. Orozco-Soto, A. Suarez, A. Caballero, M. Orsag, S. Bogdan, G. Vasiljevic, E. Ebeid, J. A. A. Rodriguez, and A. Ollero, "Safe Local Aerial Manipulation for the Installation of Devices on Power Lines: AERIAL-CORE First Year Results and Designs," in *Appl. Sci.* 2021, 11, 6220.
16. A. Ollero, et al., "AERIAL-CORE: AI-Powered Aerial Robots for Inspection and Maintenance of Electrical Power Infrastructures," in K. Loupos (Editor), *Robotics and Automation Solutions for Inspection and Maintenance in Critical Infrastructures*, 2024.
17. YouTube video: "Aerial Transportation of Human-Like Robotic Manipulator for Maintenance in High Voltage Lines", <https://www.youtube.com/watch?v=I8Ou9y5vrc0>
18. A. Suarez, R. Salmoral, P. J. Zarco-Periñan and A. Ollero, "Experimental Evaluation of Aerial Manipulation Robot in Contact With 15 kV Power Line: Shielded and Long Reach Configurations," in *IEEE Access*, vol. 9, pp. 94573-94585, 2021.
19. R. Miyazaki, R. Jiang, H. Paul, Y. Huang, K. Shimonomura, "Long-Reach Aerial Manipulation Employing Wire-Suspended Hand With Swing-Suppression Device," in *IEEE Robotics and Automation Letters*, vol. 4, no. 3, pp. 3045-3052, July 2019.
20. G. D'Ago, M. Selvaggio, A. Suarez, F. J. Gañan, L. R. Buonocore, M. Di Castro, V. Lippiello, A. Ollero, and F. Ruggiero, "Modelling and identification methods for simulation of cable-suspended dual-arm robotic systems," in *Robotics and Autonomous Systems*, pp. 104643, 2024.
21. Online article "Highlights from euROBIN Week 2023 in Seville", <https://www.eurobin-project.eu/index.php/showroom/news/27-highlights-from-eurobin-week-2023-in-seville>
22. YouTube video: "euROBIN Robotics Hackathon 2023 Seville", <https://www.youtube.com/watch?v=vrRwY7f0g8l>
23. N. Kashiri et al., "CENTAURO: A Hybrid Locomotion and High Power Resilient Manipulation Platform," in *IEEE Robotics and Automation Letters*, vol. 4, no. 2, pp. 1595-1602, April 2019.
24. M. Bjelonic et al., "Keep Rollin"—Whole-Body Motion Control and Planning for Wheeled Quadrupedal Robots," in *IEEE Robotics and Automation Letters*, vol. 4, no. 2, pp. 2116-2123, April 2019.
25. A. Suarez, A. Gonzalez-Morgado, and A. Ollero, "Lightweight and Compliant Bilateral Teleoperation System with Anthropomorphic Arms for Aerial and Ground Service Operations," *IEEE International Conference on Robotics and Automation*, 2024.

2024 INTERNATIONAL CONFERENCE ON UNMANNED AIRCRAFT SYSTEMS (ICUAS '24)



www.uasconferences.com

June 4 - 7, 2024
Chania, Crete, Greece

**INTERNATIONAL ADVISORY COMMITTEE**

Ella Atkins, Virginia Tech
YangQuan Chen, University of California Merced
Mário Sarcinelli-Filho, Federal U of Espirito Santo
Anna Konert, Lazarski University
Sami Sundström, Finnish Defence Forces
Begoña C. Arrue Ulles, University of Seville
Youmin Zhang, Concordia University

ICUAS ASSOCIATION LIAISON

Kimon Valavanis, University of Denver

HONORARY CHAIR

Anibal Ollero, University of Seville

GENERAL CHAIRS

Nikos Tsourveloudis, Technical University of Crete
Didier Theilliol, Univ. of Lorraine / Polytech Nancy

PROGRAM CHAIRS

Nikos Vitzilaos, University of South Carolina
H. Jin Kim, Seoul National University
Giuseppe Loianno, New York University

INVITED SESSIONS CHAIRS

Alessandro Rizzo, Politecnico di Torino
Alexandre Santos Brandão, Federal Univ. of Viçosa

TUTORIAL AND WORKSHOP CHAIRS

Ann-kathrin Koschlik, DLR
Benjamyn Scott, Leiden University

UAV COMPETITION

Lefteris Doitsidis, Technical University of Crete
Frano Petric, University of Zagreb

LOCAL ARRANGEMENTS & EXHIBITS CHAIR

Stavroula Tsakanelli, Technical Univ. of Crete

REGISTRATION CHAIR

George Arabatzis, Technical Univ. of Crete

PUBLICITY AND SOCIAL MEDIA CHAIR

Nadia Danezou, ICUAS Association, Inc.

WEB SERVICES CHAIR

Panos Valavanis, Lockheed Martin

PUBLICATION CHAIR

Luis Mejias Alvarez, Queensland U of Technology

IEEE CSS LIAISON

Panos Antsaklis, University of Notre Dame

IEEE RAS LIAISON

Paul Oh, University of Nevada, Las Vegas



For information related to **ICUAS '24** e-mail
Kimon Valavanis, kvalavanis@icuas.com



ΠΟΛΥΤΕΧΝΕΙΟ ΚΡΗΤΗΣ
TECHNICAL UNIVERSITY
OF CRETE

The 2024 International Conference on Unmanned Aircraft Systems, **ICUAS '24**, will take place on June 4-7. It is organized for the first time in the historical Center of Mediterranean Architecture (KAM), which is hosted in the *Great Shipyard (Megalo Arsenali)* of Chania. It is the last of the 17 shipyards located in the Venetian port of the Old Town of Chania. The conference is under the auspices of, and it is sponsored by, the Technical University of Crete (TUC).

ICUAS '24 focuses on *civil and public domain applications and on the societal impact of unmanned aviation, and its effect on everyday quality of life*. Although technical challenges cover a wide spectrum of topics, of special importance are topics like: 1) **bioinspired aerial platforms**; 2) **hybrid, platforms**; 3) **design for resiliency**, 4) **human factors**, and 5) **framework and regulations for integration into the national airspace**.

ICUAS '24 brings together, under one forum, national and international organizations, federal agencies, industry, the private sector, authorities, end-users, and practitioners, who work towards defining roadmaps of Unmanned Aircraft Systems/Remotely Piloted Aircraft Systems (UAS/RPAS), they set expectations and technical requirements and standards that are prerequisite to their full utilization and integration into the national airspace. Special emphasis will be given to research opportunities, and to *'what comes next'* in terms of the tools and support technologies, and standards, which need to be utilized and implemented to advance the state-of-the-art.

ICUAS '24 offers unique opportunities to meet, interact and shape the future of unmanned aviation, worldwide, bringing together the technical, regulatory, and legal communities. Details and logistics about the conference may be found at <http://www.uasconferences.com> and related links.

ICUAS '24 is fully sponsored by the **ICUAS Association, Inc.**, a non-profit organization, see www.icuas.com. It is technically cosponsored by the IEEE Control Systems Society, the IEEE Robotics and Automation Society, and the Mediterranean Control Association.

ICUAS '24 includes the student-focused and student-centered **UAV Competition**, which offers unique opportunities for students to test and compare their skills with those of their peers worldwide. The competition is organized in two stages: simulation qualifiers and in-person finals during the conference. Details on how to participate in the UAV Competition are available on the conference web.

CONFERENCE STRUCTURE

ICUAS '24 spans four days. The first day is devoted to Workshops and Tutorials. This is followed by three days of technical presentations. The 2024 conference aims to be 'physical presence' only with the requirement that every accepted paper is presented.


IMPORTANT DUE DATES

| | |
|----------------------------------|---|
| February 4, 2024: | Full Papers / Invited Sessions / Tutorial Proposals Due |
| February 15, 2024: | UAV Competition: simulation-based scenario |
| April 5, 2024: | Acceptance / Rejection Notification |
| April 5 – April 20, 2024: | Early Registration |
| April 20, 2024: | Upload Final, Camera Ready Papers |

SUBMISSIONS

Papers: Paper format (two-column) follows IEEE guidelines. Electronic submission will be handled through PaperCept - details are available on the conference web site. Submitted papers should be classified as *Contributed* or *Invited Session* (max. 8 pages), or *Poster* (max. 6 pages) papers. Accepted, contributed, and invited session papers only, will be allowed up to two additional pages for an extra charge per additional page. Poster papers should aim at novel and cutting-edge ideas with potential, however, not yet fully developed. **Invited Sessions:** Proposals for invited sessions should contain a summary statement describing the motivation and relevance of the proposed session, the invited paper titles, and the names of the authors. **Authors must submit FULL invited papers.** Each paper must be marked as "Invited Session Paper". **Workshops and Tutorials:** Proposals for workshops and tutorials should contain title, list of speakers, and extended summaries (2000 words) of their presentations. All contributions (papers, invited papers, proposals for invited sessions, workshops, and tutorials) must be submitted electronically through <https://controls.papercept.net> by the due date.

Paper Review Process: All submitted papers will undergo a thorough peer review process coordinated by the Program Chairs, Advisory Committee Members, IPC members, Associate Editors, and qualified reviewers. Each paper will be reviewed by (at least) three qualified reviewers. Each Associate Editor will make recommendations. The Program Chairs will finalize and announce decisions by the due date. Each submitted paper will be checked for originality through the *iThenticate Plagiarism Detection Software*.



THE 2024 INT'L CONFERENCE ON UNMANNED AIRCRAFT SYSTEMS

ICUAS 2024

JUNE 4-7, 2024

Chania, Crete, Greece

