


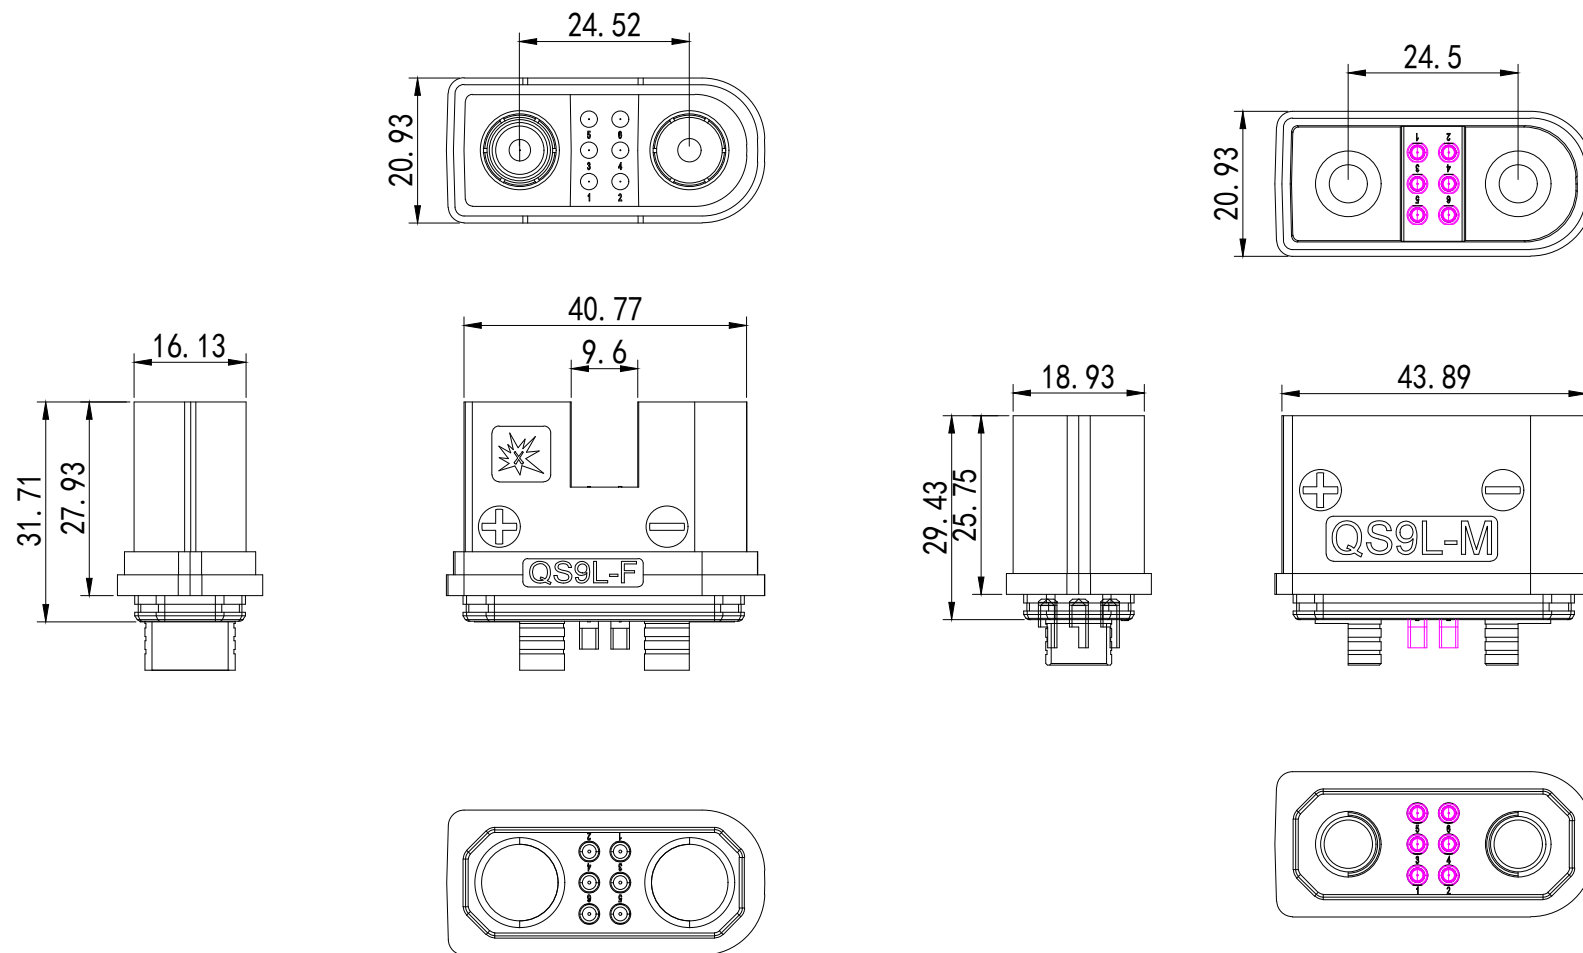

QS9L-F/M防打火插壳 无人机/锂电动力连接器供电插头+通讯接口

产品型号：QS9L-F/M

产品颜色：黑色

Product model:QS9L-F

Color:Black

瞬间电流：220A

额定电流：180A

Instantaneous current:220A

Current rating:180A

接触电阻：0.51mΩ

额定电压：DC 500V

Contca Resistance:0.51mΩ

Voltage rating:DC 500V

阻燃等级：UL94 VO

推荐应用：电池/控制器

Flammability:UL94 VO

Recommended application:battery/controller

金属材质：铜 镀金

推荐线规格：4AWG-10AWG

Contact material:Copper Plate

Poles:4AWG-10AWG

绝缘材质：PA


工作温度：-20℃ to 120℃

Material:PA

Working Temperature:-20℃ to 120℃

推荐使用次数：1000 TIMES

Recommended TIMES:1000 TIMES

REV.	CHANGE	DATE
QS 东莞市求尚电子科技有限公司 Dong Guang Qiu Shang Electronic Tech CO.,Ltd		
UNIT	SCALE	VERSION
MM	FREE	A0
规格描述 DESCRIPTION		QS9L-F/M
 ALL DIMENSIONS ARE IN MM. UNLESS OTHERWISE SPECIFIED. TOL. ARE: (ON DECIMAL PLC) ±0.5 . X (DECIMAL PLC) ±0.10 . XX (DECIMAL PLC) ±0.05 X, (NO DECIMAL PLC) ±1 XX, (1. DECIMAL PLC) ±0.20		

1	插头	QS9L-F/M					
序号	品名	规格					备注
客户确认 user		核 准 Approve		审 核 Checking	绘 图 Drawing	周华盛 2019/11/14	CODE: QS-BG00311