




Female:

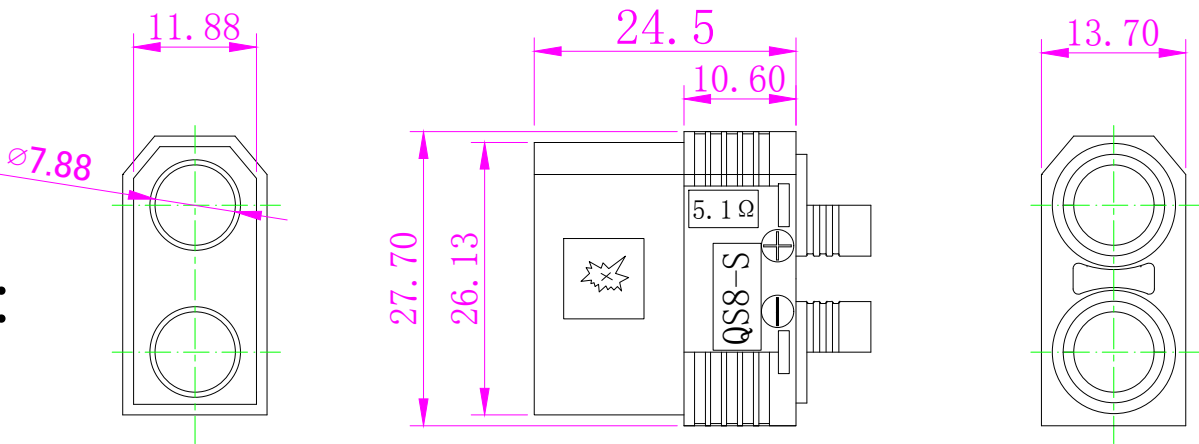

Male:

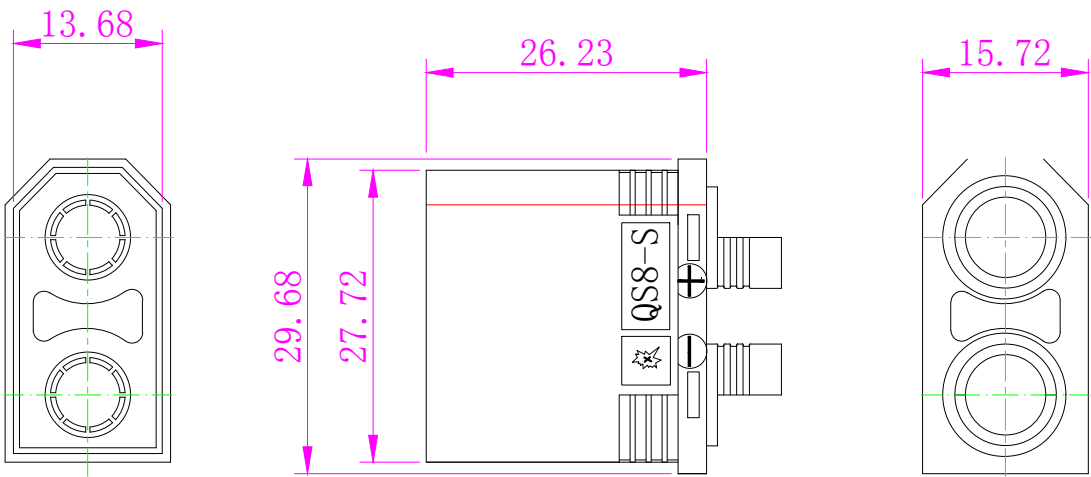

Cover:

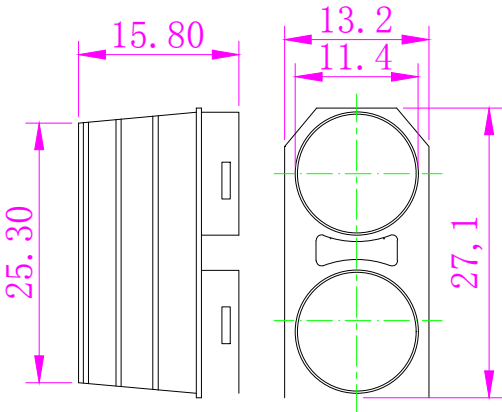


Application areas:

QS8-S remote control aircraft/car power bank charging plug, remote control RC/car power bank fireproof flower plug, new energy battery, drone, robot and other connectors

Model No: QS8-S
Transient current: /
Contact resistance: 0.51mΩ
Retardant grade: UL94 V0
Material: Copper/Gold-plated
Shell : PA
Durability: 1000 TIMES

Color: Black
Rated current: 110A
Rated Voltage: DC 500V
Application: Battery, Charger
Wire AWG: 6AWG-10AWG
Working Tem: -20° C to 120° C

REV.	CHANGE	DATE
Youwei Technologies(Dongguan)CO.,Ltd		
UNIT	SCALE	VERSION
MM	FREE	A0
规格描述 DESCRIPTION		QS8-S AntiSpark

	ALL DIMENSIONS ARE IN MM. UNLESS OTHERWISE SPECIFIED. TOL. ARE: (ON DECIMAL PLC) ±0.5
SIZE:A4	. X (DECIMAL PLC) ±0.10
	. XX (DECIMAL PLC) ±0.05
	X, (NO DECIMAL PLC) ±1,
	XX, (1. DECIMAL PLC) ±0.20,

序号	料号	品名	规格				QYY
客户确认 user		核准 Approve	审核 Checking	绘图 Drawing	周华盛 19/04/18	CODE: QS-BG00318	