
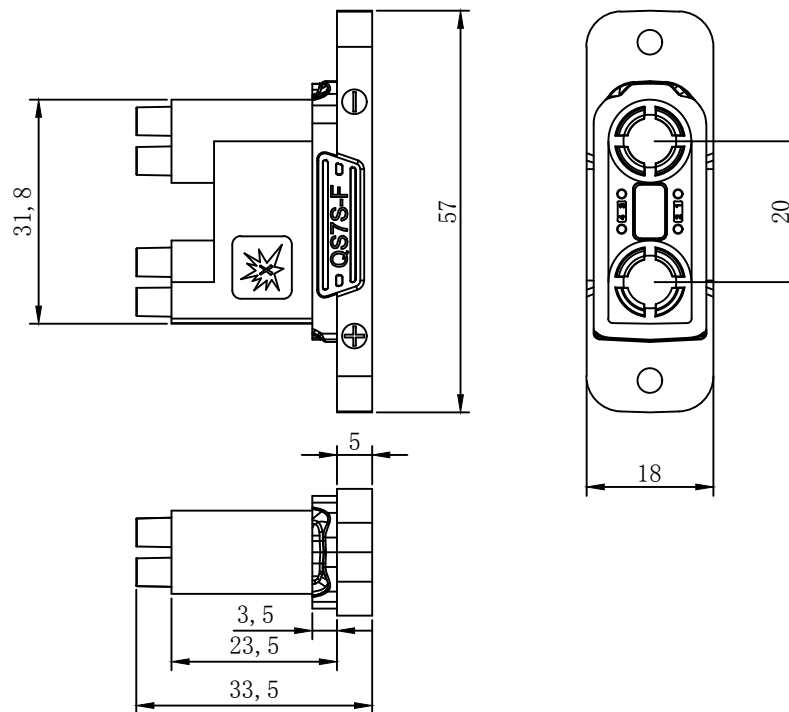


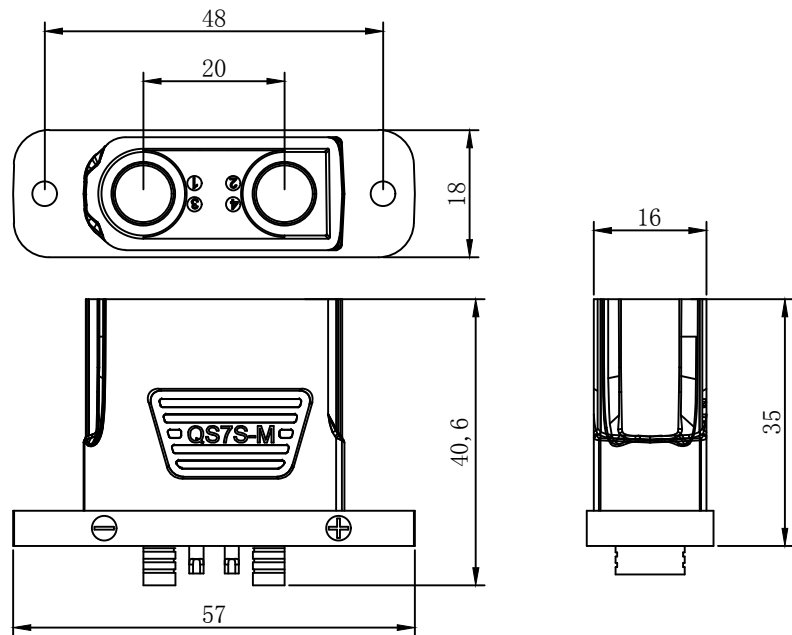

注：1. 未注公差为：±0.10

技术参数(Technical Date):

产品型号(Modle): QS7L
接触电阻(Contact Resistance): $\leq 0.51\text{m}\Omega$
阻燃等级(Flame Rating): UL94 V0
绝缘材质(Insulation Material): PA
金属材质(Metal Material):
铜镀金(Gold-plated copper)
推荐线规(Wire Range): 8AWG-12AWG

产品颜色(Color): 黑色 (Black)
额定电压(Rated Voltage): $\geq \text{DC } 500\text{V}$
额定电流(Rated Current): $\geq 80\text{A}$
推荐应用(Application): 电池 控制器 充电器
(Battery, Controller, Charger)
工作温度(Work Temperature): -20°C to 120°C

REV.	CHANGE	DATE
QS 东莞市求尚电子科技有限公司 Dong Guan Qiu Shang Electronic Tech CO.,Ltd		
UNIT	SCALE	VERSION
MM	FREE	A0
规格描述 DESCRIPTION		QS7S公&母插头

ALL DIMENSIONS ARE IN MM. UNLESS OTHERWISE SPECIFIED. TOL. ARE: (ON DECIMAL PLC) ± 0.5
. X (DECIMAL PLC) ± 0.10
. XX (DECIMAL PLC) ± 0.05
X, (NO DECIMAL PLC) ± 1 ,
XX, (1. DECIMAL PLC) ± 0.20 ,

1	塑胶材质	PA66 V-0 (FR50) BK							
序号	品名	规格							
客户确认 user		Approve		审 核 Checking		绘 图 Drawing	陈芬红 23/02/20	CODE: QS-BG00458	