



REFLECTIVE TAPE - CONSPICUITY TAPE

Part No. 1012561
 1-1/2" x 150' roll
 11" Red / 7" White.
 7 year warranty.



Part No. 1012569
 2" x 150' roll
 6" Red / 6" White
 7 year warranty.



Part No. 1012562
 4" x 150' roll
 Solid Red.
 7 year warranty.

Part No. 1012570
 Tape Kit for 48' trailer
 7 year warranty.



Part No. 1012563
 2" x 150' roll
 12" White.
 Kiss Cut roll.
 7 year warranty.



Part No. 1012571
 2" x 150' roll
 White roll.
 7 year warranty.



Part No. 1012564
 2" x 150' roll
 9" Red.
 Kiss Cut roll
 7 year warranty.

Part No. 1012572
 2" x 150' roll
 11" Red / 7" White
 7 year warranty



Part No. 1012565
 2" x 150' roll
 9" White
 Kiss Cut roll.
 7 year warranty.



Part No. 1012573
 2" x 18" strips
 7 year warranty.




Part No. 1012566
 2" x 150' roll
 11" Red / 7" Silver
 5 year warranty.

Part No. 1012574
 Tape kit for 53' trailer
 7 year warranty.



Part No. 1012567
 1" x 150' roll
 11" Red / 7" White
 7 year warranty.

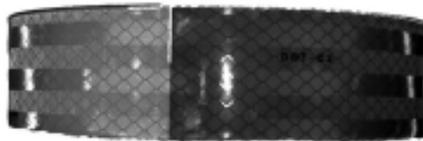

Part No. 1012575
 2" x 150' roll
 11" Red / 7" White
 Kiss Cut roll
 7 year warranty



Reflective Strips

Part No. 033-04259 Straight reflective strips

Part No. 033-04263 Angled reflective strips



- Reflective strips attached to aluminum strips.
- Universal mount - for either roadside or curbside use.
- Can be used with any straight, shortie, bar or spring loaded bracket.
- Part number represents one strip.

Part No. RT25 Straight reflective strips

Part No. RT35 Angled reflective strips






STAR® WARNING AND EMERGENCY LIGHTS AND STROBES

The **200S series** are our most popular medium profile strobe lights. The rugged die-cast base is fully gasketed and the circuit is completely encapsulated for increased shock and weather resistance. RFI protection is available for double or quad flash. Ships complete with mounting hardware and instructions.

Medium Profile Strobe

- Amber lens
- Under 6.25" high, 5.5" dia.
- Easy maintenance
- Sealed power supply

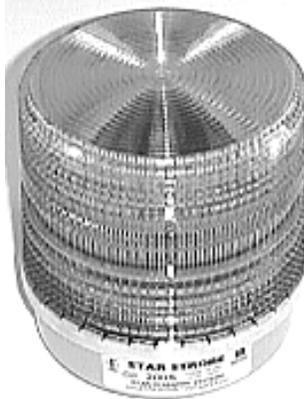

Single flash, 12V DC
Part No. 200S

Double flash, 12-24V DC
Part No. 200SD

Quad flash, 12-24V DC
Part No. 200SQ

The **255HTC** offers a patented LED diagnostic indicator, a photocell for automatic "night" mode switching, and field-selectable flash patterns via an internal jumper for quad flash or random flash. The virgin Lexan® lens easily twists on/off the durable and lightweight polycarbonate plastic, universal mount, flanged base. The circuit is completely encapsulated for increased shock and weather resistance and is also protected with a low voltage shutdown feature. RFI protection is standard.

**Flange/Pipe Base
Quad or Random Flash
Amber Strobe, 12-24V DC
6-11/16" High,
6-13/32" Diameter
Part No. 255HTC**



The **200Z Series** is a compact and powerful, low profile strobe. The polycarbonate lens is clamped to the rugged die-cast aluminum base with a fully gasketed aluminum retaining ring to enhance water resistance.



Low Profile Strobes

- Clear or Amber lens
- 4 1/8" high, 4 1/8" diameter
- 12V
- Singleflash



Surface or pipe mount:
Part No. 200Z-C (Clear Lens)
Magnetic mount:
Part No. 200ZM (Amber Lens)

The **201Z Series** is a small, dynamic, low profile strobe with a quick-snap lens and base assembly for easy field repairs. The polycarbonate lens is sealed to the base with a water resistant enhanced O-ring.



Low Profile Strobe

- Amber lens
- 4 1/4" high, 4 1/4" diameter
- 12V
- Quad flash



Surface or pipe mount:
Part No. 201ZQ

The **200C series** are basic strobe lights that are economically priced. They are built tough with anodized spun aluminum bases for increased durability and weather resistance. For medium to heavy duty applications.



**Flange Base Quad Flash
Amber Strobe, 12-24V DC
7-9/16" High,
7-3/4" Diameter Base
Part No. 200CFQ**

The **240 Series** is our most popular and most versatile strobe light.

The circuit is completely encapsulated for increased shock and weather resistance.

The rugged die-cast aluminum base is protected with a powder coat finish.



Medium Profile

- Amber lens, 6" high, 5 1/2" dia.
- Flange Mount.
- Double flash, 12, 24V
Part No. 240CFD
- Quad flash, 12, 24V
Part No. 240CFQ

Medium Profile, Amber, Magnet

- Magnet Mount.
- Quad flash, 12, 24V
Part No. 240CMQ



Low Profile

Flange Base Quadflash

- Amber lens, 4 1/4" high, 5 1/2" diameter
- Universal mounting die cast base
- 12, 24V
- Quadflash
Part No. 240SFQ-A

Low Profile Quadflash

- Amber lens, 4 1/4" high, 5 1/2" diameter
- Quadflash •Magnetic Mount
Part No. 240SMQ

¹Approval: SAE J1318 Class 1/2/3



STAR® WARNING AND EMERGENCY LIGHTS AND STROBES



Remote Power Supply

Provides Super-Bright Flash Power to your choice of 1, 2, 3 or 4 remote strobe heads. High performance with compact design. Features power reduction to operating heads in case of head failure. Uses 7.8 amps peak draw for 6.4 joules per five flash per head. 75 watts. **Part No. RP244**



FLASH TUBES

Replace the internal flash tube .
For these models in stock:



200 Series: **Part No. 129**



Compact 200 Series: **Part No. 129-Z**



Quad Flash: **Part No. 129DH**



STROBE TUBE - 360 Degree: Part No. ST3901-7

Starburst™ Auxillary light


Small, powerful, and weather resistant where intense LED lighting is needed.
1-7/16"H x 4"W x 1-7/8"Deep
Part No. DLX3-A



Remote Strobe Head
Oval, Amber.
2-1/2"H, 6-1/2"W, 2"D
Part No. 3920A-MDOT

Amber Remote Strobe Head

360° 8" strobe head with standard 180" cable.
8" high x 5-1/2" diameter
Part No. 3940-180-A

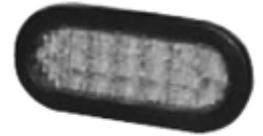

Flashing LED head
Built in flasher. Selectable flash sequences. Encapsulated. Circuitry encased. Comes w/pigtail.
Part No. LDHEF-6-A

The 9200S Series mini-bars are a compact, all-in-one package with the reliability and attention getting power you need. Dual high intensity strobes are enhanced with twin internal V-mirrors. Durable polycarbonate domes resist UV deterioration and are fully gasketed to protect against the elements. The ABS plastic bases make these mini-bars lightweight and will not corrode. The circuit and strobe tube assemblies are fully encapsulated to guard against shock and vibration and are also easily field replaceable. The 9200S series is offered in both permanent and magnetic mount.

The 9200H Series mini-bars are a compact, all-in-one package, with the reliability and attention getting power you need. Dual rotators are enhanced with a single wall mirror. Durable polycarbonate domes resist UV deterioration and are fully gasketed to protect against the elements. The ABS plastic bases make these mini-bars lightweight and will not corrode. Patented shock mounted rotators with two sealed roller bearings provide quiet, smooth, and maintenance free operation.


STAR Mini-Bars

- STAR attention-getting power and reliability.
- Two internal "V" mirrors to enhance flashes.
- Quiet operation.

Part No. 9200SQ

Mini-Bar with two 360° **Quad flashing** remote Strobeheads, one double V-mirror, one 2-head strobe pack.

9200SMQ Shown (9200H same size)

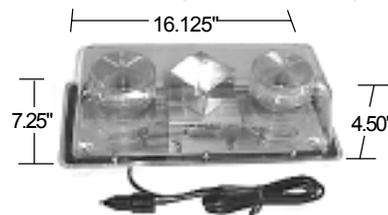

Part No. 9200SMQ-A

Mini-Bar with two 360° **Quad flashing** remote Strobeheads, one double V-mirror, one 2-head strobe pack, with magnetic mount.

9200H



9200HM



Part No. 9200H

Mini-Bar with dual rotating **50 watt halogen bulbs**



Part No. 9200HM

Mini-Bar with dual rotating **50 watt halogen bulbs**, with magnetic mount.



FEDERAL SIGNAL WARNING-EMERGENCY LIGHTS AND STROBES



Firebolt® Plus Strobe
- Single flash

Features modular power supply with replaceable flash tube. 12 to 72VDC. Enclosed base with all mounting hardware. 3-5/8" high, 5" diameter.

Part No. 220200-02 Amber Lens
Magnetic Mount:
Part No. 220208-02 Amber Lens



Model 901

Compact high intensity 16 joule strobe. Features a helical flash tube for increased light intensity. Polycarbonate lens and dust covers are standard. 5.75" high, 6.625" diameter 12-48VDC, amber lens.

Part No. 211740-02 double flash

REPAIR PARTS

Part No. 210846

Aluminum Flush Enclosed Bottom - for 401, 651, 851, 901, 951

Part No. 210890

Polycarbonate magnet mounting kit includes magnet, cigarette - for Pulsator 451, 551

Flash Tubes:

Part No. 211200-95 - for 602 series

Part No. 211300-95 - for Firebolt

Part No. 211400-95 - for 851 series

Part No. 439290-95 - for 551 series

Part No. 439411-95 - for 451 series



FIREBOLT

2 joule power supply, 12 to 72VDC. Applications: forklifts, electric vehicles, industrial trucks & equipment. Tough, impact resistant polycarbonate lens and housing. Single Flash 3-5/8" high, 5" diameter base. Includes mounting hardware. (3 bolts)
Amber: Part No. 220100-02
Clear: Part No. 220100-05



PULSATOR 451

8 joule power supply, 12 to 48VDC. Applications: Snowplows, highway vehicles. Double flash. Enclosed polycarbonate base. 4" tall, 6-1/2" diameter.
Amber: Part No. 211680-02
Clear: Part No. 211680-05
Heavy Duty Version:
(Gel-filled base-protection)
Amber: Part No. 211823-02



PULSATOR 551

Features 10 joule power supply, 12 to 48VDC. Applications: dump trucks, crawlers, loaders. 6" tall, 6-1/2" diameter polycarbonate base. Double flash. Includes mounting hardware.
Amber: Part No. 211681-02
Heavy Duty Version:
(Gel-filled base-protection)
Amber: Part No. 211820-02



MODEL 651

Features 12 joule power supply, 12 - 48VDC. Applications: Snowplows, highway vehicles, school buses, cranes. Anodized aluminum base with polycarbonate lens. 5-3/4" high, 6-5/8" diameter. Amber lens.
Double Flash: Part No. 420200-02



MODEL 851

An 12 joule power supply operates on 12-24VDC. Applications: Tow trucks, farm equipment, front loaders. Anodized aluminum base, polycarbonate lens. 7.50" high, 6.625" diameter base. Amber lens.
Double Flash: Part No. 420400-02



Highliter™ Mini-Lightbars - AMBER

15", 12VDC, 95FPM, 2 rotators. Diagonal mirror, permanent mount.

Part No. 450112-02

Part No. 450142-02 (Same as above with magnetic suction cups and cord.)

Part No. 452341 - Magnetic suction cups and cord kit - (after 2002)

Part No. 454201-02

LED version of above, permanent mount. 360° light distribution. 20 flash patterns.




**GROTE AND TRUCKLITE EMERGENCY LIGHTS AND STROBES****2 Sealed Beams ROTO-BEACON®**

- 12V, yellow lens.
- Clutched gearbox design.
- sealed, permanently lubricated gear box.
- revolves 360 degrees.
- 60-120 flashes per minute.

**Grote****Part No. GR76223****SuperNova® 4" LED Strobe Light**

- Encapsulant potting protects the circuit board offering maximum protection against dirt, moisture, and corrosion.
- Internal circuitry eliminates the need for an external power supply or control module.
- Requires only a 12-volt DC connection for power.
- Functions as either a dual flash strobe or a quad flash strobe.
- Lamps fit 4 inch standard mounting.
- Lamps mount in any orientation.
- Grote's rugged Plug-and-Go® terminals make for a quick, easy connection every time.

Grote

4.35" diameter

Part No. GR77353**SuperNova® Oval LED Strobe Light**

- Encapsulant potting protects the circuit board offering maximum protection against dirt, moisture and corrosion.
- Internal circuitry eliminates the need for an external power supply or control module.
- Requires only a 12-volt DC connection for power.
- Functions as either a dual flash strobe or a quad flash strobe.
- Lamps fit oval standard mounting holes.
- Lamps mount in any orientation.
- Grote's rugged Plug-and-Go® terminals make for a quick, easy connection every time.

Grote

6.50" diameter

Part No. GR77363**Super 44 Series LED Integral Strobe - 42 diode pattern**

- External power pack not required
- Metalized reflector version offers more intense focused light
- Non-metalized version offers wider viewing angle
- Dual or quad flashing patterns
- Meets recommended SAE J1318 & J845 photometric specifications
- Synchronized alternating feature
- Lamp life rated at 100,000 hours
- Resistance to shock & vibration
- Fit'N Forget adapter plug provides corrosion & moisture resistance, 16 ga. wire
- Integral flange option features built-in lens

TruckLite

4.35" diameter

Part No. TL44102Y kit includes: (TL44212Y, TL40700 grommet, TL95220 connector)**Super 60 Strobe LED Integral Strobe - 36 diode pattern**

- External power pack not required
- Metalized reflector version offers more intense focused light
- Non-metalized version offers wider viewing angle
- Dual or quad flashing patterns
- Meets recommended SAE J1318 & J845 photometric specifications
- Mounts horizontally or vertically
- Fit'N Forget adapter plug provides corrosion & moisture resistance, 16 ga. wire
- Lamp life rated at 100,000 hours
- Resistance to shock & vibration



6.50" diameter

TruckLite**Part No. TL60120Y kit includes: (TL60362Y, TL60700 grommet, TL95220 connector)**



BACK-UP ALARMS

Federal Signal Target Tech Evacuator Plus backup alarms feature a lightweight piezo-electric output circuit. It is highly resistant to vibration damage. The housing is made of high impact ABS plastic resin and is sealed against moisture, dust and corrosion. It is steam cleanable. It is reverse polarity and voltage spike protected, and can be installed on positive and negative ground vehicles.



Sound

Level	Part No.
87 dB	210330
97 dB	210331
107 dB	210333
112 dB	210335



Voltage: 12 to 48 VDC
 Current Draw: L/T .10 Amps
 Weight: .284 lbs. (129 grams)
 Pulse Frequency: Approx. 2400 Hz
 Temp. Range: -40 to 165 Deg. F.

BAC-A-LARM® 200 Series


This 200 Series alarm is in the highest demand category of any low sound level alarm on the market. Weight: 10 oz. Dimensions: 4.02L, 1.6"D, 2.67"H.

- Part No. 220 87 Decibels,**
12V, SAE J994 Type D
- Part No. 230 97 decibels,**
12V, SAE J994 Type C
- Part No. 250 102 Decibels,** 12-24V
- Part No. 270 107 Decibels,** 12-24V



All Preco Electronic Alarms Feature:

- 24 month warranty
- Passed million cycle operational test
- Meet OSHA, Bureau of Mines and state regulations
- Decibel ratings are +/- dB (A) @4' as specified in SAE J994 Mar 85
- Solid state electronics sealed in urethane
- Steam cleanable
- *Temp range of -40 degree to +170 degree F.
- All alarms, circuit boards, speakers and drivers are manufactured in the U.S.A.

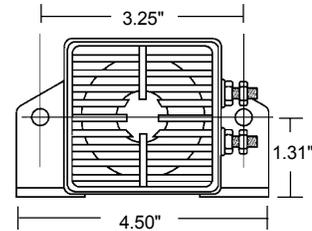

Part No. FS255 -Fast sounding alarm for special applications requiring a unique sound option. This alarm is capable of quickly demanding attention with sound pulses at 10 bursts per second.

40-Series BAC-A-LARM

The most compact 4" alarm on the market. This flush mount alarm fits into any 40 series round hole and requires no tools for installation.

- Use industry standard 40-series grommets
- Use industry standard 2 or 3 pronged pigtailed
- Steam cleanable
- Dimensions: 4^{5/16}" round, 1^{3/4}" deep
- Weight 12 oz.
- Voltage spike protected
- Works with positive or negative ground systems
- 2 Year warranty

- Part No. 4030** 97 decibels - 12V
- Part No. 4050** 102 decibels - 12-24V



Mounting Suggestion:
 Truck-Lite
 TL40720 Bracket
 TL40700 Grommet

Velvac Speaker Style Back-up Alarm

Velvac speaker style back-up alarms feature chemical resistant, high impact housings to protect internal components and epoxy sealed solid state electronics for trouble-free operation and safe steam cleaning. Universal flange for mounting flexibility and two 16 gauge, 9 inch color-coded wire leads for fast, dependable installation. In addition, each unit is polarity and voltage protected and meets SAE J994 AUG 93 Types A to D requirements.

- Part No. 697097**
97 Decible Alarms, 12-24V



These heavy gauge, chrome-plated steel back-up alarms are gravity activated. When the vehicle backs up at a reasonable speed, four heavy steel balls fall and strike the bell housing. Mechanical alarms do not require a battery and will function with the motor on or off.



Part No.	Amp	L x W x H
210400	87dB	6.0 x 6.0 x 3.6



FLEETCRAFT MINIATURE BULBS



FC194 FC1156 FC1157 FC1893

Bulb Part No.	Bulb	Service and Special Description	Design Volts	Design Amps	Rated Ave. Life (Hrs)	Base	Overall Length
FC37	T-1 3/4	Auto	14.00	.09	1500	Wedge	.800
FC53	G-3 1/2	Auto and Indicator	14.40	.12	1000	Min. Bay.	.937
FC57	G-4 1/2	Auto	14.00	.24	500	Min. Bay.	1.063
FC67	G-6	Auto	13.50	.59	5000	S.C. Bay.	1.437
FC73	T-1 3/4	Auto and indicator	14.00	.08	15000	Wedge	.800
FC89	G-6	Auto	13.00	.58	750	S. C. Bay.	1.437
FC97	G-6	Auto	13.50	.69	5000	S. C. Bay.	1.437
FC194	T-3 1/4	Auto	14.00	.27	3500	Wedge	1.063
FC194A	T-3 1/4	Auto	14.00	.27	3500	Wedge	1.063
FC198	S-8	Auto	12.80	2.25	1500	D. C. Index	2.000
FC561	T-3	Auto	12.80	.97	1000	Dble Wedge	1.719
FC906	T-5	Auto - Heavy Duty	13.00	.69	1000	Wedge	1.490
FC912	T-5	Auto	12.80	1.00	1000	Wedge	1.500
FC1003	B-6	Auto	12.80	.94	200	S. C. Bay.	1.750
FC1141	S-8	Auto	12.80	1.44	1000	D. C. Bay.	2.000
FC1142	S-8	Auto	12.80	1.44	1000	D. C. Bay.	2.000
FC1156	S-8	Auto	12.80	2.10	1200	S. C. Bay.	2.000
FC1157	S-8	Auto	12.80	2.10	1200	D. C. Index	2.000
FC1157NA	S-8	Auto	12.80	2.10	1200	D. C. Index	2.000
FC1889	T-3 1/4	Auto	14.00	.27	3500	Min. Bay.	1.188
FC1893	T-3 1/4	Radio	14.00	.33	7500	Min. Bay.	1.188
FC1895	G-4 1/2	Auto	14.00	.27	3500	Min. Bay.	1.188
FC3157	S-8	Auto	12.80	2.10	1200	D. C. Wedge	2.120
FC3157NA	S-8	Auto	12.80	2.10	1200	D. C. Wedge	2.120

HEADLAMP BULBS

Replaceable Headlamp Bulbs

Bulb Part No.		Design Volts	Design Watts	Rated Ave. Life (Hrs)	Base
BP886	Auto Fog	12.80	3.90 amps	150	Rt. Angle
FC9004	High/Low beam	12.80	65.00	150	Axial
L9004LL	High beam	12.80	65.00	150	Axial
(long life bulb)	Low beam	12.80	47.00	850	Axial
FC9005XS	High Beam	12.80	65.00	150	Axial
FC9005XSLL	High Beam	12.80	65.00	700	Axial
FC9006XS	Low Beam	12.80	55.00	320	Rt. Angle
FC9006XSLL	Low Beam	12.80	55.00	2000	Rt. Angle
9005	High Beam	12.80	65.00	800	Rt. Angle
9006	Low Beam	12.80	55.00	320	Axial
9007	High/Low beam	12.80	65.00	150	Axial
	High/Low beam	12.80	55.00	320	



FC Prefix =
Fleetcraft Bulb






MINIATURE BULBS



Lamp Trade No.	Bulb	Service and Special Description	Design Volts	Design Amps	Rated Ave. Life (Hrs)	Base	Overall Length
L37	T-1 3/4	Auto	14.00	.09	1500	Wedge	.800
L53	G-3 1/2	Auto and Indicator	14.40	.12	1000	Min. Bay.	.937
L57	G-4 1/2	Auto	14.00	.24	500	Min. Bay.	1.063
L67	G-6	Auto	13.50	.59	5000	S.C. Bay.	1.437
L74	T-1 3/4	Auto	14.00	.10	500	Wedge	.800
L89	G-6	Auto	13.00	.58	750	S. C. Bay.	1.437
L97	G-6	Auto	13.50	.69	5000	S. C. Bay.	1.437
L193	T-3 1/4	Auto	14.00	.33	75,000	Wedge	1.063
L194	T-3 1/4	Auto	14.00	.27	3500	Wedge	1.063
L198	S-8	Auto	12.80	2.25	1500	D. C. Index	2.000
L199	S-8	Auto	12.80	2.25	1500	S. C. Bay.	2.000
L211-2	T-3	Auto	12.80	.97	1000	Dble End Cap	1.719
L561	T-3	Auto	12.80	.97	1000	Dble Wedge	1.719
L795	T-4	Signal	12.80	3.91	200	S. C. Bay.	2.500
L899	T-3 1/4	Auto Fog	12.80	2.93	1900	Axial, Plastic	2.680
L904	T-5	Auto	13.50	.69	5000	Wedge	1.500
L906	T-5	Auto	13.00	.69	1000	Wedge	1.500
L912	T-5	Auto	12.80	1.00	1000	Wedge	1.500
L1003	B-6	Auto	12.80	.94	200	S. C. Bay.	1.750
L1156	S-8	Auto	12.80	2.10	1200	S. C. Bay.	2.000
L1157	S-8	Auto	12.80	2.10	1200	D. C. Index	2.000
L1157NA	S-8	Auto Amber	12.80	2.10	1200	D. C. Index	2.000
L1662	S-8	Construction Equip.	28.00	.93	400	D. C. Index	2.000
L1816	T-3 1/4	Aviation and Auto	13.00	.33	1000	Min. Bay.	1.188
L1889	T-3 1/4	Auto	14.00	.27	3500	Min. Bay.	1.188
L1891	T-3 1/4	Auto Radio & Indicator	14.00	.24	500	Min. Bay.	1.188
L1893	T-3 1/4	Auto Heavy Duty	14.00	.33	7500	Min. Bay.	1.188
L1895	G-4 1/2	Auto, Truck Marker	14.00	.27	3500	Min. Bay.	1.188
L3057	S-8	Auto Stop, Signal	12.80	2.10	1200	D. C. Wedge	2.120
L3156	S-8	Auto Stop	12.80	2.10	1200	S. C. Wedge	2.120
L3157	S-8	Auto Stop, Signal	12.80	2.10	1200	D. C. Wedge	2.090
L3157NA	S-8	Auto Stop, Signal Natural Amber	12.80	2.10	1200	D. C. Wedge	2.090

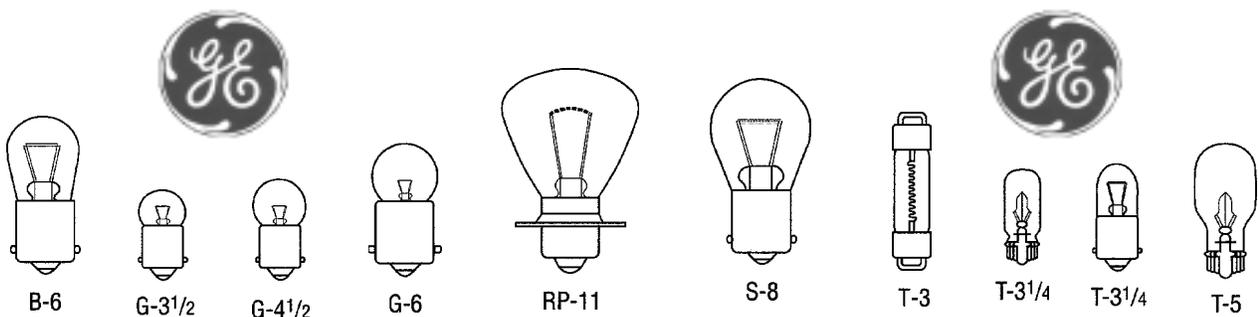



SEALED BEAMS - HALOGEN LAMPS - HALOGEN BULBS

Compared to Incandescent Bulbs, Halogen Bulbs Provide:

- Crisp, white light. • Excellent beam control
- High lumen maintenance
(which means it stays bright over most of its life)
- Energy savings. • Compact size • Long life



**H6054HO - GE Halogen High Output
80% more light, 2x the life! (H=Halogen)**

Lamp Trade No.	Bulb	Service and Special Description	Design Volts	Design Watts PR Amps	Rated Ave. Life (Hrs)	Base
L4411-3	PAR-36	Tractor	12.80	35.0	300	Combination
L4412	PAR-46	Auto Fog	12.80	35.0	300	M-P
L4415A	PAR-36	Auto Fog Amber	12.80	35.0	300	M-P
L4416	PAR-36	Auto Spot	12.80	30.0	300	M-P
L4421	PAR-36	Auto Special Service	13.00	100.0	300	M-P
L4509	PAR-36	Aviation Landing	13.00	100.0	25	M-P
L4537	PAR-46	Aviation Landing	13.00	100.0	25	M-P
H4651	REC-58	Auto Headlamp High Beam 4 Lamp Rectangular System	12.80	50.0	200	2 Lugs
4652	REC-58	Auto Headlamp Low Beam 4 Lamp rect. System (Halogen)	12.80	60.0	200	3 Lugs
H4656	165mm	Auto Headlamp Low Beam 4 Lamp rect. System (Halogen)	12.80	35.0	200	3 Lugs
H4656HO	165mm	Auto Headlamp High Beam 4 Lamp rect. System (Halogen) Low Beam	12.80 12.80	40.0 55.0	200 700	3 Lugs
L4921-1	165mm	Rectangular 4.2" x 6.5"-Auto/Truck	13.00	100.00	300	Slip-on terminals
H5006	PAR-46	Auto Headlamp Low Beam Round System (Halogen)	12.80	35.0	200	3 Lugs
H5054	200mm	Rect 5.6" x 7.9"-Truck High/Low	12.80	65.0 / 42.0	400 / 2000	3 Lugs
H5062	165mm	Rect 4.2" x 6.5"-Truck High/Low	12.80	40.0 / 55.0	400 / 2000	3 Lugs
6014	PAR-56	Auto Headlamp Hi / Low 2 Lamp Round System	12.80	60.0 / 50.0	320 / 150	3 Lugs
6015	PAR-56	Truck - Heavy Duty Headlamp	12.80	50.0	300	3 Lugs
H6024	PAR-56	Auto Headlamp Round Hi / Low 2 Lamp System (Halogen)	12.80	60.0 / 35.0	150 / 320	3 Lugs
6052	REC-68	Auto Headlamp Rectangular Hi/Low 2 lamp System	12.80	65.0 / 55.0	150 / 320	3 Lugs
H6054	REC-68	Auto Headlamp Rectangular Hi/Low 2 Lamp System (Halogen)	12.80	65.0 / 35.0	150 / 320	3 Lugs
H6054HO	REC-68	Auto Headlamp Rectangular Hi/Low Hi/Low (Halogen) Higher Output	12.80	65.0 / 55.0	150 / 700	3 Lugs
L7400	PAR-36	Signal / Rotating Beacon	12.80	35.0	300	Slip-on terminals
H9406	150mm	Rectangular 3.6" x 5.9"-Tractor/Flood	12.80	50.0	400	2 Rt angle Lugs
H9420	150mm	Rectangular 3.6" x 5.9"-Auto	12.80	50.0	200	2 Rt angle Lugs
H9421	150mm	Rectangular 3.6" x 5.9"-Auto/Truck	12.80	50.0	200	2 Rt angle Lugs

HALOGEN HEADLAMP BULBS

Replaceable Halogen Headlamp Bulbs					
Bulb Part No.	Design Amp	Design Volts	Design Watts	Rated Ave. Life (Hrs)	Base Type
H1-55W	4.58	13.20	55.0	225	P14.5s
H3-35W	2.92	13.20	35.0	400	PK22s
H3-130W	10.83	13.20	130.0	50	PK22s
H7-55W	4.58	13.20	55.0	500	PX26d
H11-55W	4.58	12.00	55.0	500	PGJ19-2





HADLEY AIR HORNS AND ACCESSORIES

Air horn kits and accessories are designed for vehicles with or without air brakes. When ordering, make sure you are specifying the right kit for the application you require. If the vehicle has air brakes, with a built-in air supply, your kit will feature manual, lanyard valve activation. Choose the horn you want and order it by its kit number. You will receive everything needed for installation. For vehicles without air brakes, you have the option of either an electric or vacuum compressor and either solenoid or manual lanyard activation. When you order a kit for a vehicle without air brakes, choose the style, then order by kit number that has the compressor and activation options you want.



For Vehicles With Air Brakes

Metal Round Horn with Black Finish For Vehicles with Air Brakes. The Hadley Bully Series.

Horn Dimensions:
14-15 1/16" overall length.
1/4" PTC fitting size.

Part No. H00640R



For Vehicles With Air Brakes

Rectangular Bell The Original For Vehicles with Air Brakes Lanyard Activated

Horn Dimensions:
29" L x 8 1/2" W x 4 3/4" H
29" L x 8 1/2" W x 4 3/4" H All chrome twin single horns

Kit Part No. H00981

Kit Includes: **H00978, H00977 Horns**, H755VE Manual Lanyard Valve, H13110-11 1/4" O. D. Nylon Tubing 13', HPB859-0, HPB977-11 Parts Bags



For Vehicles With Air Brakes

Rectangular Bell The Original For Vehicles with Air Brakes Solenoid Activated

Horn Dimensions:
29" L x 8 1/2" W x 4 3/4" H
26" L x 8 1/2" W x 4 3/4" H All chrome twin single horns

Kit Part No. H00981D

Kit Includes: **H00978, H00977 Horns**, H550A Remote Solenoid, Valve, H13110-13 1/4" O. D. Nylon Tubing 20', HPB859-2, HPB977-11 Parts Bags



For Vehicles Without Air Brakes

Bully™ Dual Horn Kit Electric Compressor - Solenoid Activated

Horn Dimensions: 15 1/4" L x 7" W x 3 3/4" H
Black body, chrome projectors and cover, dual horn

Kit Part No. H00961EA
Kit contains: **H00910CA Horns**, H852EC 12V Electric Compressor, H626 Air Tank 5" x 7", H550B Solenoid, H12949 Toggle Switch, H13110-13 1/4" Nylon Tubing, 20', H891H Aux. Air Fill Hose, 25', H14212 Air Gauge, HPB641-4 Parts Bag



For Vehicles With Air Brakes

Chrome Plated Horn Kit - Lanyard Activated

Horn Dimensions: 15-5/16" L x 7" W x 3 3/4" H
Black body, chrome projectors, dual horn

Kit Part No. H00900CA
Kit contains: **H00910CA Horns**, H00755N Lanyard Valve, H131110-2 Nylon Tubing



For Vehicles With Air Brakes


Chrome Plated Horn Lanyard Activated

Horn Dimensions: 15-5/16" L x 7" W x 3 3/4" H
Kit Part No. H00910CA



**HADLEY AIR HORN ACCESSORIES****Manual Lanyard Valve
(Remote Mount)**


For Horn Kits H859, H981
Part No. H00755VE

Compressor Kit

Compressor and parts kit
for complete installation.
Part No. H00850EC

Air Tank

Bully kits. 5" x 7",
137 Cubic inch.
Part No. H00626

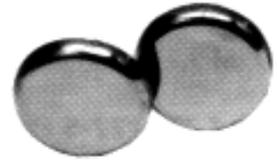**Snow & Bug Shields:
Stainless Steel to Protect
Horns from the Elements**

Bell sizes 3³/₄" & 4".
Part No. H00926
(Part No. = 1 pair)

**Chrome
Projector Support
(Open Top)**

Includes fiber pad and
rubber grommet.
Part No. H13723S

Pressure Switch

For Bully. For 12V electric
compressor 120 - 150 psi.
Part No. H13940S

**Air Gauge
(160 PSI)**

Safely monitor the pressure
in a supply tank
Part No. H14212S

Manual Lanyard Valve

Releases air from supply
tank without electrical
hookup. All brass with
tension washers and
compression fittings.
Part No. H00755NS

**Solenoid Kit
Remote Mount**

For Horn Kit H981D
Part No. H00550A

**Solenoid Kit
Tank Mount**

For Horn Kits H961CA,
H961EA, H977N, H859E.
Direct installation on small
or large air tank.
1/8" NPT x 1/4" tubing
Part No. H00550B

**Brass Compression
Fitting, 90 Deg. Elbow**

Use if headliner is 1/2" or
less. 1/4" O. D. tubing x
7/16"-24 horn mounting.
Part No. H11477S

