



End Section A--A

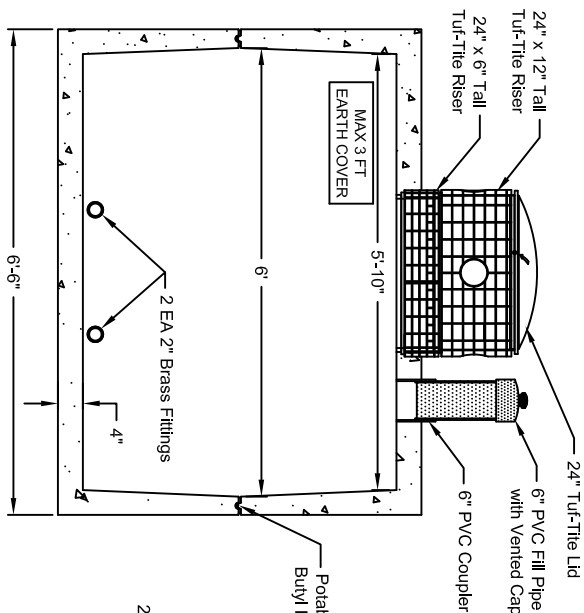

Cross Section B--B

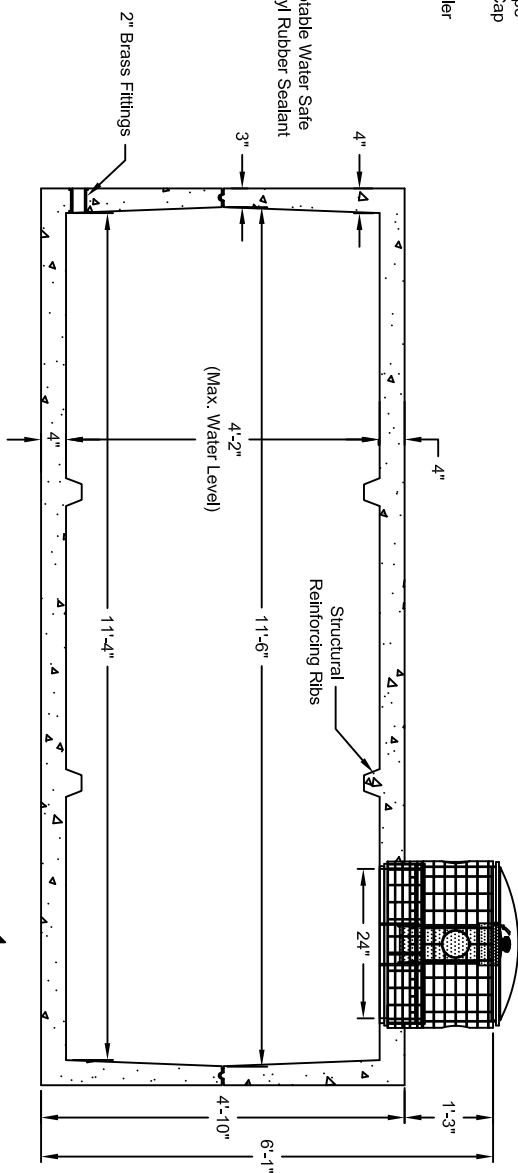

SPECIFICATIONS


TANK: Portland Type V (sulfate resistant) cement, 4000 psi (min), #4 Grade 60 rebar and steel wire mesh reinforcement, 2 EA 2" brass FPT fittings cast into tank end wall for inlet / outlet pipe penetrations, 1 EA 24" dia. x 6" tall Tuf-Tile manway access riser cast into top of tank, 1 EA 6" SDR35 PVC slip coupler cast into top of tank for fill pipe extension.

STANDARD COMPONENTS: 1 EA 24" dia. x 12" tall Tuf-Tile access riser extension, 1 EA 24" Tuf-Tile domed lid, 12 EA SS screws, 1 EA 6" SDR35 x 16" long PVC fill pipe extension and PVC cap with screened vent, ConSeal CS-665 1 1/4" profile potable water safe butyl rubber sealant to seal tank joint.

NOTE (1): Tank must be installed per Billings Precast's 'Tank Installation Guide' or warranty will be VOID.

NOTE (2): Tank shall NOT be placed in a traffic area (ie. parking lot, driveway, etc.) - warranty will be VOID if driven on.

Tank Top View

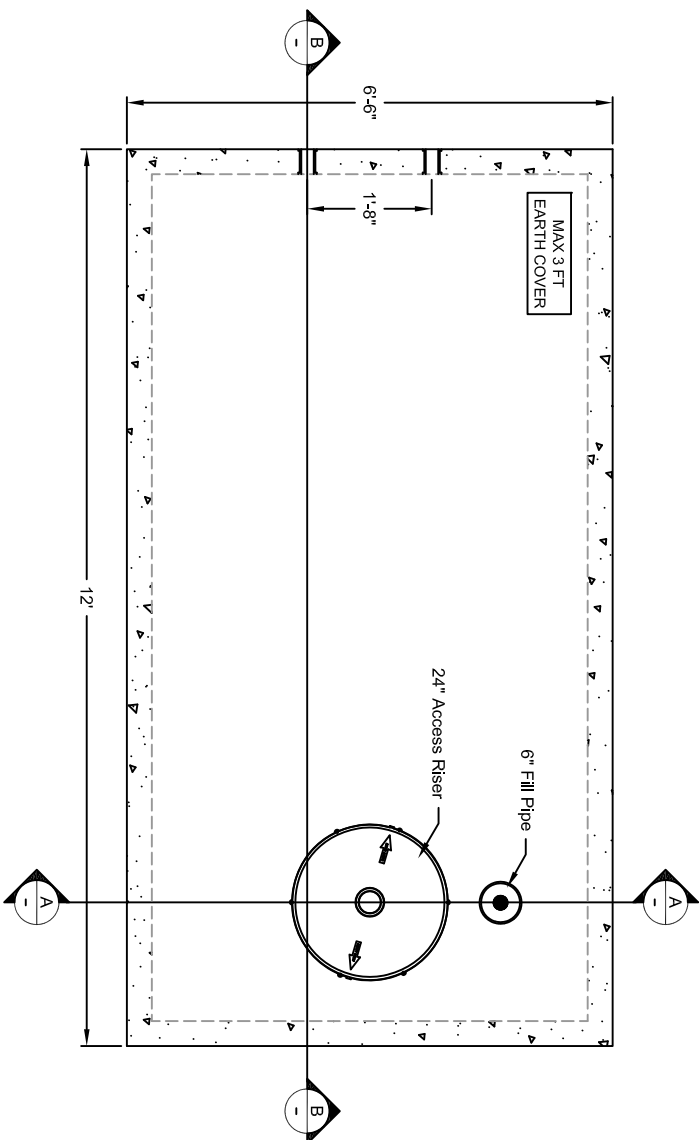

WEIGHTS: Tank Bottom - 7250 lb.; Tank Top - 7100 lb.; Total All - 14,400 lb.



5815 Interstate Ave
Billings, MT 59101
Phone (406) 656-6098
Fax (406) 656-4942
www.billingsprecast.com

Drawing No.

C2200

2200 Gallon Water Storage Tank
- Two Piece Tank / Non-Traffic Rated -

DATE: 10/12/2023

SCALE: NONE

REV: ---

CAD: WDB

Sheet: ■■■■