

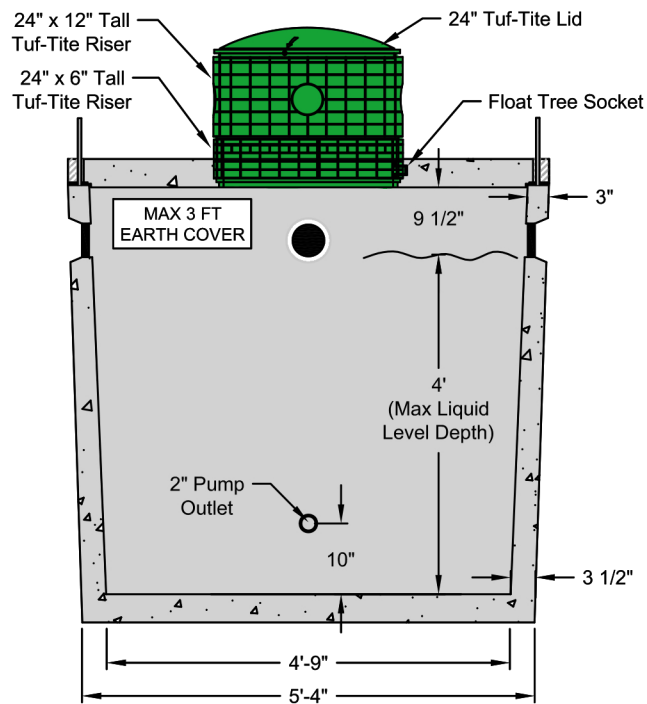


Cross Section A--A

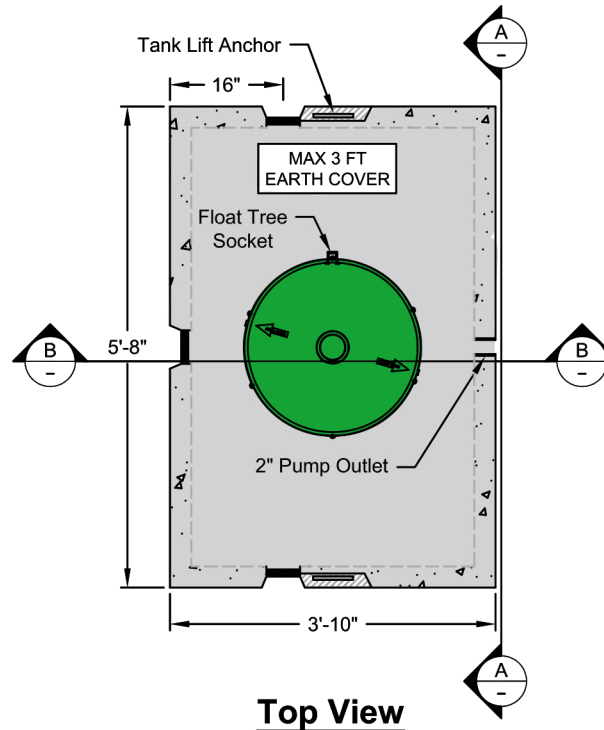

Cross Section B--B

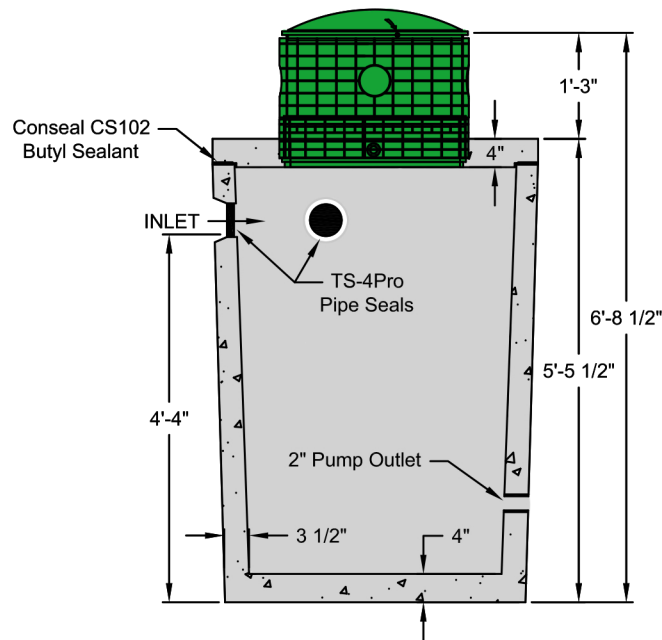

Top View



5815 Interstate Ave
Billings, MT 59101
Phone (406) 656-6098
Fax (406) 656-4942
www.billingsprecast.com

DT05S

500 Gallon Single Piece Dosing Tank
- One Compartment / Non-Traffic Rated -

Drawing No.

DATE: 2/10/2021

SCALE: NONE

REV: ---

CAD: WDB

Sheet: 1

Sheet: 1

Sheet: 1

Sheet: 1

SPECIFICATIONS

TANK: Manufactured per 2013 Montana Circular DEQ-4 Chapter 5 design standards for septic tanks, 2 EA 9500 lb. wire rope tank lift anchors, 1 EA 24" dia. x 6" tall Tuf-Tite access riser cast into tank lid, 3 EA Tuf-Tite TS-4Pro pipe seals cast in for inlet and outlet pipe penetrations, 2" Sch40 PVC coupler cast into tank wall for pump outlet connection, 1" PVC float tree socket, ConSeal CS-102 1" butyl rubber sealant to seal tank lid.

STANDARD COMPONENTS: 1 EA 24" dia. x 12" tall Tuf-Tite access riser extension, 1 EA 24" Tuf-Tite lid, SS screws, 5/16" butyl sealant to seal between access risers.

NOTE 1): Tank must be installed per Billings Precast's 'Tank Installation Guide' or warranty will be VOID.

NOTE 2): Tank shall not be placed in a traffic area (ie. parking lot, driveway, etc.) - Warranty will be VOID if driven on.

WEIGHTS: Tank - 4050 lb.; Lid - 900 lb. [Total Assembled - 5000 lb.]