

LOCTITE® DRI 2250-W™

October 2022

PRODUCT DESCRIPTION

LOCTITE® DRI 2250-W™ provides the following product characteristics:

Technology	Acrylic
Chemical Type	Methacrylate ester
Components	Two-component
Appearance - Part A	Blue, Homogenous, Viscous liquid
Appearance - Part B	Yellow, Homogenous, Viscous liquid
Viscosity	Low
Cure	Anaerobic
Cured Thermal Stability	≤200 °C
Application	Threadlocking
Specific Benefits	- Flow coatable - Can be diluted with DI/RO water to adjust viscosity for ease of application

LOCTITE® DRI 2250-W™ is a medium to high strength pre-applied threadlocker with good adhesion to a variety of fastener finishes, specially designed to meet automotive specification requirements. It is suitable for use on plain and passivated metal surfaces. This product has good hot strength and heat aging capabilities up to 220°C as well as good solvent resistance properties. The pre-applied film is dry-to-the-touch and remains an inert coating until assembly. During assembly microcapsules, which are contained within the coating, are crushed thereby releasing an active ingredient which initiates the curing process. LOCTITE® DRI 2250-W™ prevents loosening of threaded fasteners. When cured, this product will also act as a thread sealant. It is particularly suitable in situations where threaded parts are required to be ready for immediate use in an adhesive joint in a high volume production environment where it may not be possible to apply a liquid product on line.

LOCTITE® DRI 2250-W™ is a two component product. When using the first combination (Part A + Part B), the resultant coating is green in color.

TYPICAL PROPERTIES OF UNCURED MATERIAL

Part A:

Flash Point - See SDS

Viscosity, Brookfield , 25 °C, mPa·s (cP):

Spindle 4, speed 20 rpm 2,500 to 7,500

pH 8 to 10

Part B:

Flash Point - See SDS

Viscosity, Brookfield , 25 °C, mPa·s (cP):


Spindle 5, speed 20 rpm 7,000 to 12,000

TYPICAL CURING PERFORMANCE

On Part Life, years 1 to 4
(depending on the storage conditions of coated fasteners)


Cure Speed vs. Substrate

The graph below shows the breakaway strength developed with time on M10 x 1.5 bolts of various substrates and tested at room temperature according to ASTM D5649.

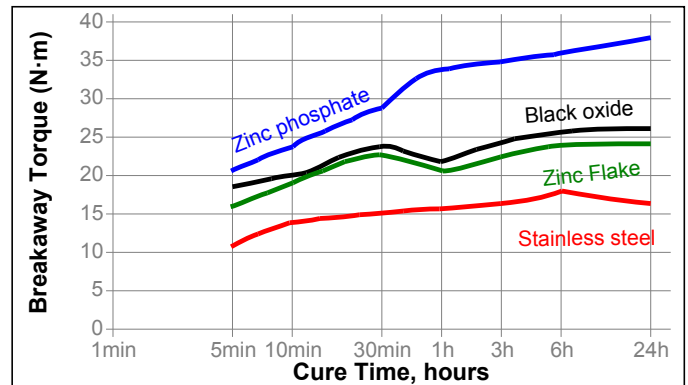

Cure Speed vs. Temperature

The rate of cure will depend on the ambient temperature. The graph below shows the breakaway strength developed with time at different temperatures on M10 X 1.5 black oxide bolts and steel nuts and tested according to ASTM D5649.

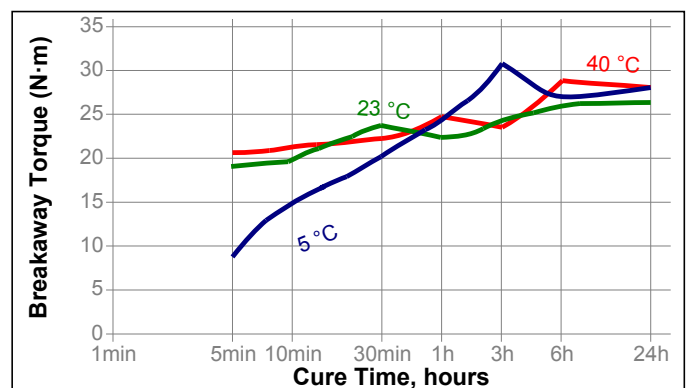

TYPICAL PERFORMANCE OF CURED MATERIAL**Adhesive Properties**

After 24 hours @ 22°C

Breakaway Torque, ASTM D 5649:

M10 X 1.5 steel bolts	N·m	≥50
	(lb.in.)	(≥442)

After 72 hours @ 22°C

Breakaway Torque, ASTM D 5649:

M10 x 1.5 steel bolts with Zinc plated nuts	N·m	≥50
	(lb.in.)	(≥442)

Breakloose Torque, ASTM D 5649, input torque = 50 Nm:

M10x 1.5 Zinc Phosphate, zinc plated nuts	N·m	≥40
	(lb.in.)	(≥354)

M10 x 1.5 Zinc Flake, zinc plated nuts	N·m	≥35
	(lb.in.)	(≥310)

M10 x 1.5 Stainless Steel, zinc plated nuts	N·m	≥45
	(lb.in.)	(398)

Total Coefficient of Friction (DIN 16047):

These values are only valid for tested combinations of fasteners. Friction coefficients are based on :

- Surface finish
- Surface roughness
- Fitting quality of bearing surface
- Lubrication
- Assembly conditions (e.g. screw-in speed)
- Design (e.g. dimensions, geometry of threads)

M10 x 1.5 Zinc phosphate, zinc plated nuts 0.11


M10 x 1.5 Non-Electrolytically applied zinc rich coating, zinc plated nuts 0.11

M10 x 1.5 Zinc plating and friction modifying topcoat, zinc plated nuts 0.14

M10 x 1.5 Zinc plating with no topcoat, zinc plated nuts 0.15

Torque Augmentation

Breakloose torque of an uncoated fastener will normally be 15 to 30% less than the on-torque. The effect of LOCTITE® DRI 2250-W™ on the breakloose torque with black oxide fasteners is shown in the graph below.

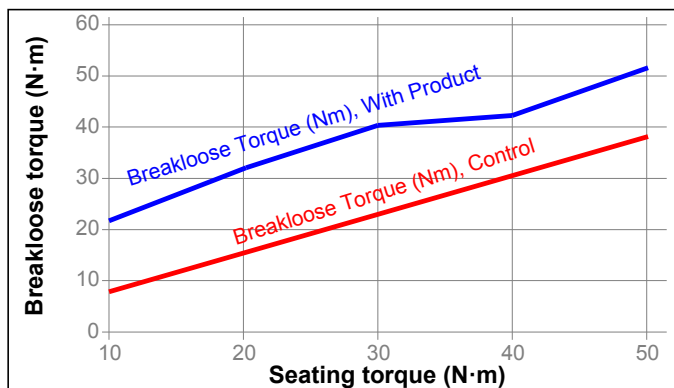**TYPICAL ENVIRONMENTAL RESISTANCE**


After 24 hours @ 22°C

Breakaway Torque, ASTM D 5649:

M10 x 1.5 (unseated)

Hot Strength

Tested at temperature

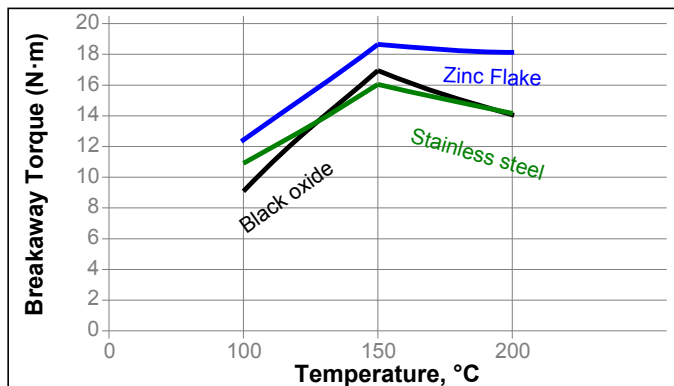**Chemical/Solvent Resistance**

Aged under conditions indicated and tested @ 22°C.

Breakaway Torque, ASTM D 5649:

M10 X 1.5 black oxide bolts and steel nuts (unseated)

Environment	°C	% of initial strength		
		168 h	500 h	1000 h
Motor oil	120	37	33	32
Motor oil	150	18	19	19
Unleaded gasoline	22	82	78	77
Brake fluid	90	85	82	62
Water/glycol 50/50	120	32	30	27
Transmission fluid	120	34	37	36
Transmission fluid	150	18	17	19
Gear oil	120	40	34	39
DEF (AdBlue®)	22	85	94	104

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Safety Data Sheet (SDS).

This product is not normally recommended for use on plastics (particularly thermoplastic materials where stress cracking of the plastic could result). Users are recommended to confirm compatibility of the product with such substrates.

Directions for use

1. Loctite DRI 2250-W is usually applied to threaded parts by authorized process centers who have automatic fastener cleaning, feeding, coating, rust proofing and drying equipment.
2. Quantities can be handled promptly with minimum turnaround time.
3. Sample parts should be sent to the authorized process center of your choice where they can coat them for your evaluation.
4. For ease of processing by the authorized process centers, the viscosity of this product can be adjusted by adding de-ionized/RO water to make it flow-coatable.
5. **SAMPLE TESTS ARE RECOMMENDED TO OBTAIN THE DESIRED RESULTS ON YOUR PARTS.**
6. Contact your nearest Henkel sales representative or our website for the authorized process center nearest to you.

Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

Store coated fasteners between 4 to 38° C (40 to 100°F) with low relative humidity (Dew Point below 62). Coated fasteners stored outside the recommended conditions may have an impact on the coatings performance. Coated fasteners which are more than one year from the date of adhesive application, as well as fasteners exposed to conditions outside of the recommended storage conditions should be checked for performance prior to use. Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Henkel representative.

Conversions

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$
 $\text{kV/mm} \times 25.4 = \text{V/mil}$
 $\text{mm} / 25.4 = \text{inches}$
 $\mu\text{m} / 25.4 = \text{mil}$
 $\text{N} \times 0.225 = \text{lb}$
 $\text{N/mm} \times 5.71 = \text{lb/in}$
 $\text{N/mm}^2 \times 145 = \text{psi}$
 $\text{MPa} \times 145 = \text{psi}$
 $\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$
 $\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$
 $\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$
 $\text{mPa}\cdot\text{s} = \text{cP}$

Disclaimer

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, or Henkel Canada Corporation, the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference 1.0