



RIGO'S WINDOWS & PATIO DOORS
 7127 Hollister Ave, STE 8
 Goleta, CA 93117
 805-770-7879
 www.rigoswindows.com

MILGARD
 WINDOWS and DOORS

Quote Name: BONEYARD
Customer: RIGO'S WINDOWS & PATIO DOORS
Payment Terms: [REDACTED]
Sales Representative: Rigo Vela, Mobile: 805-636-3675, rigoswindows@gmail.com
Weighted Average: U-Factor: .29, SHGC: 0.2, VT: .46
Comments:

Quote Number: SQPHEU004517
Created Date: 5/1/2024
Modified Date: 5/20/2024
PO Number: BONEYARD
Total Windows: 15
Total Doors:
Total Sq Ft: 23.00
Total Perim Ft: 79
Est. Delivery: _____

For warranty information please visit www.milgard.com/warranty/


Billing Information

Name: RIGO'S WINDOWS & PATIO DOORS
Address: 7127 Hollister Ave, STE 8, Goleta, CA 93117
Phone: 805-770-7879
Fax: CELL: 805-636-3675
Email: rigoswindows@gmail.com

Shipping Information

Name:
Address:
Phone:
Fax:
Email:

Line: 1 **Location:** AA 01
Quantity: 1 **Trinsic V300, 2570T, FC, Standard Z-Bar, Ext Silver / Int White, U-Factor: .28, SHGC: .20, VT: .44**
 1/8" SunCoatMAX (Low-E) over 1/8" Clear
 Ext Silver/Int White
 Standard Z-Bar
 Argon Gas Filled
 Tariff

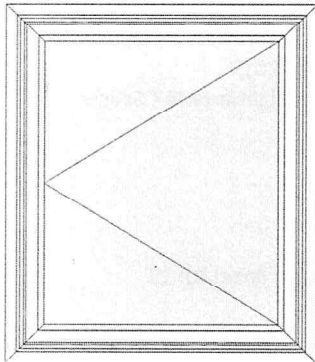


Viewed From Exterior

Model = Casement
 Size = Net Frame: 29 3/4" x 35 3/4"
 Handing = Left
 Energy Star Zone(s) = South Central; Southern; Meets Title 24 2019
 Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer
 Glazing = 7/8" OA Dual Glaze with Argon
 Hardware = Nesting Fold Down Roto/Stainless Steel Operator Handle, 90 Degree Hinge
 Screen = Standard with Fiberglass Mesh
 Ratings = STC: 30, OITC: 26, PG: CW-PG35
 Clear Opening = W 22 3/4" x H 31 7/16" Sq. Ft. 4.97
 Calculations = Unit Area (Sq. Ft.): 8, Unit Perimeter (nominal in lineal ft): 11'
 Other Ratings = CPD: MIL-A-296-04209-00001

Customer Approval: _____

Line: 2 **Location:** AA 02
Quantity: 2 **Trinsic V300, 2170, HV, Standard Z-Bar, Ext White / Int White, U-Factor: .28, SHGC: .20, VT: .48**

1/8" SunCoatMAX (Low-E) over 1/8" Clear
Pull Rail Screen with Fiberglass Mesh
Standard Z-Bar
Argon Gas Filled
Tariff

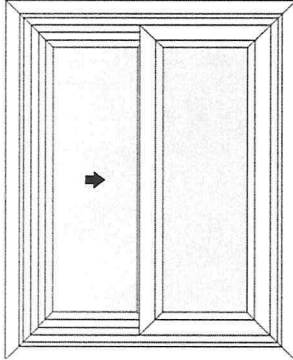

Viewed From Exterior

Model = Half Vent

Size = Net Frame: 21 1/4" x 28"

Handing = XO

Energy Star Zone(s) = South Central; Southern; Meets Title 24 2019

Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer

Glazing = 3/4" OA Dual Glaze with Argon

Hardware = SmartTouch Lock

Screen = Pull Rail with Fiberglass Mesh

Ratings = STC: 29, OITC: 24, PG: LC-PG25

Clear Opening = W 8 1/4" x H 25 1/2" Sq. Ft. 1.46


Calculations = Unit Area (Sq. Ft.): 4, Unit Perimeter (nominal in lineal ft): 9'

Other Ratings = CPD: MIL-A-294-12560-00001

Customer Approval: _____

Line: 3 **Location:** AA 03
Quantity: 1 **Trinsic V300, 2170, HV, Standard Z-Bar, Ext White / Int White, U-Factor: .28, SHGC: .20, VT: .48**

1/8" SunCoatMAX (Low-E) over 1/8" Clear
Pull Rail Screen with Fiberglass Mesh
Standard Z-Bar
Argon Gas Filled
Tariff

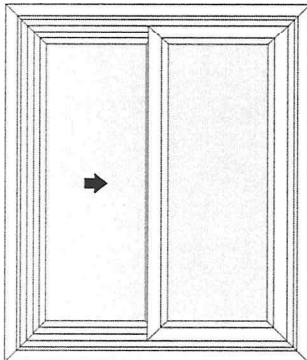

Viewed From Exterior

Model = Half Vent

Size = Net Frame: 26 1/2" x 32 3/4"

Handing = XO

Energy Star Zone(s) = South Central; Southern; Meets Title 24 2019

Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer

Glazing = 3/4" OA Dual Glaze with Argon

Hardware = SmartTouch Lock

Screen = Pull Rail with Fiberglass Mesh

Ratings = STC: 29, OITC: 24, PG: LC-PG25

Clear Opening = W 10 7/8" x H 30 1/4" Sq. Ft. 2.28


Calculations = Unit Area (Sq. Ft.): 6, Unit Perimeter (nominal in lineal ft): 10'

Other Ratings = CPD: MIL-A-294-12560-00001

Customer Approval: _____

Line: 4 **Location:** AA 04
Quantity: 1 Trinsic V300, 2570T, FC, Standard Z-Bar, Ext White / Int White, U-Factor: .28, SHGC: .20, VT: .44

1/8" SunCoatMAX (Low-E) over 1/8" Clear
Standard Z-Bar
Argon Gas Filled
Tariff

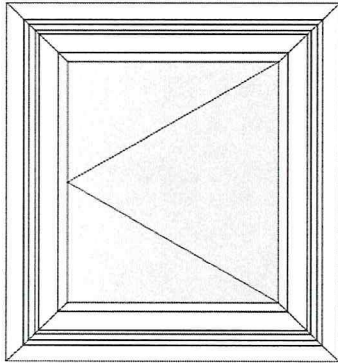


Viewed From Exterior

Model = Casement
Size = Net Frame: 19" x 21 3/4"
Handing = Left
Energy Star Zone(s) = South Central; Southern; Meets Title 24 2019
Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer
Glazing = 7/8" OA Dual Glaze with Argon
Hardware = Nesting Fold Down Roto/Stainless Steel Operator Handle, 90 Degree Hinge
Screen = Standard with Fiberglass Mesh
Ratings = STC: 30, OITC: 26, PG: CW-PG35
Clear Opening = W 12" x H 17 7/16" Sq. Ft. 1.45
Calculations = Unit Area (Sq. Ft.): 3, Unit Perimeter (nominal in lineal ft): 7'
Other Ratings = CPD: MIL-A-296-04209-00001

Customer Approval: _____

Line: 5 **Location:** AA 05
Quantity: 1 Trinsic V300, 2570T, FC, Standard Z-Bar, Ext Black / Int White, U-Factor: .28, SHGC: .20, VT: .44

1/8" SunCoatMAX (Low-E) over 1/8" Clear
Ext Black/Int White
Standard Z-Bar
Argon Gas Filled
Tariff

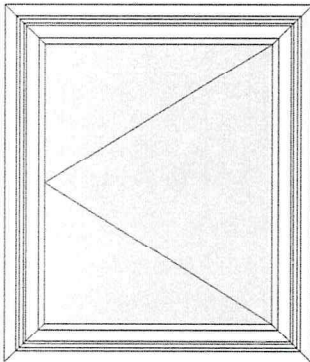


Viewed From Exterior

Model = Casement
Size = Net Frame: 28 1/8" x 34 1/4"
Handing = Left
Energy Star Zone(s) = South Central; Southern; Meets Title 24 2019
Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer
Glazing = 7/8" OA Dual Glaze with Argon
Hardware = Nesting Fold Down Roto/Stainless Steel Operator Handle, 90 Degree Hinge
Screen = Standard with Fiberglass Mesh
Ratings = STC: 30, OITC: 26, PG: CW-PG35
Clear Opening = W 21 1/8" x H 29 15/16" Sq. Ft. 4.39
Calculations = Unit Area (Sq. Ft.): 7, Unit Perimeter (nominal in lineal ft): 11'
Other Ratings = CPD: MIL-A-296-04209-00001

Customer Approval: _____

Line: 6
Quantity: 1

Location: AA 06
Trinsic V300, 2170, HV, Standard Z-Bar, Ext White / Int White, U-Factor: .28, SHGC: .20, VT: .48
1/8" SunCoatMAX (Low-E) over 1/8" Clear
Pull Rail Screen with Fiberglass Mesh
Standard Z-Bar
Argon Gas Filled
Tariff

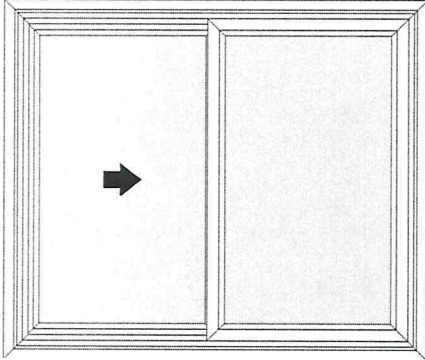


Viewed From Exterior

Model = Half Vent
Size = Net Frame: 44 1/4" x 37 7/8"
Handing = XO
Energy Star Zone(s) = South Central; Southern; Meets Title 24 2019
Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer
Glazing = 3/4" OA Dual Glaze with Argon
Hardware = SmartTouch Lock
Screen = Pull Rail with Fiberglass Mesh
Ratings = STC: 29, OITC: 24, PG: LC-PG25
Clear Opening = W 19 3/4" x H 35 3/8" Sq. Ft. 4.85
Calculations = Unit Area (Sq. Ft.): 12, Unit Perimeter (nominal in lineal ft): 14'
Other Ratings = CPD: MIL-A-294-12560-00001

Customer Approval: _____

Line: 7
Quantity: 1

Location: AA 07
Trinsic V300, 2170, HV, Standard Z-Bar, Ext White / Int White, U-Factor: .28, SHGC: .20, VT: .48
1/8" SunCoatMAX (Low-E) over 1/8" Clear
Pull Rail Screen with Fiberglass Mesh
Standard Z-Bar
Argon Gas Filled
Tariff

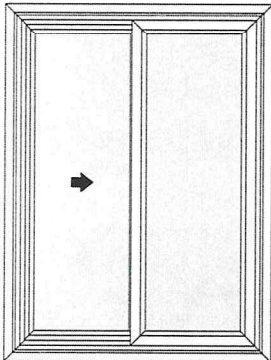

Viewed From Exterior


Model = Half Vent
Size = Net Frame: 32 1/2" x 45 1/2"
Handing = XO
Energy Star Zone(s) = South Central; Southern; Meets Title 24 2019
Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer
Glazing = 3/4" OA Dual Glaze with Argon
Hardware = SmartTouch Lock
Screen = Pull Rail with Fiberglass Mesh
Ratings = STC: 29, OITC: 24, PG: LC-PG25
Clear Opening = W 13 7/8" x H 43" Sq. Ft. 4.14
Calculations = Unit Area (Sq. Ft.): 11, Unit Perimeter (nominal in lineal ft): 14'
Other Ratings = CPD: MIL-A-294-12560-00001

Customer Approval: _____

Line: 8
Quantity: 1

Location: AA 08
Trinsic V300, 2170, HV, Standard Z-Bar, Ext Tan / Int Tan, U-Factor: .28, SHGC: .20, VT: .48

1/8" SunCoatMAX (Low-E) over 1/8" Clear
Pull Rail Screen with Fiberglass Mesh
Ext Tan/Int Tan
Standard Z-Bar
Argon Gas Filled
Tariff

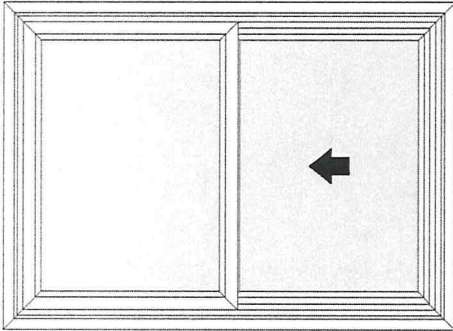

Viewed From Exterior


Model = Half Vent
Size = Net Frame: 45 1/2" x 32"
Handing = OX
Energy Star Zone(s) = South Central; Southern; Meets Title 24 2019
Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer
Glazing = 3/4" OA Dual Glaze with Argon
Hardware = SmartTouch Lock
Other Options = Standard Glazing Bead
Screen = Pull Rail with Fiberglass Mesh
Ratings = STC: 29, OITC: 24, PG: LC-PG25
Clear Opening = W 20 3/8" x H 29 1/2" Sq. Ft. 4.17
Calculations = Unit Area (Sq. Ft.): 10, Unit Perimeter (nominal in lineal ft): 14'
Other Ratings = CPD: MIL-A-294-12560-00001

Customer Approval: _____

Line: 9
Quantity: 2

Location: AA 09
Trinsic V300, 2170, HV, Standard Z-Bar, Ext White / Int White, U-Factor: .28, SHGC: .20, VT: .48

1/8" SunCoatMAX (Low-E) over 1/8" Clear
Pull Rail Screen with Fiberglass Mesh
Standard Z-Bar
Argon Gas Filled
Tariff

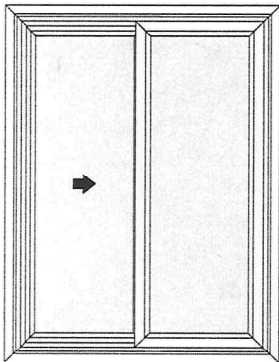


Viewed From Exterior

Model = Half Vent
Size = Net Frame: 33 1/8" x 45"
Handing = XO
Energy Star Zone(s) = South Central; Southern; Meets Title 24 2019
Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer
Glazing = 3/4" OA Dual Glaze with Argon
Hardware = SmartTouch Lock
Screen = Pull Rail with Fiberglass Mesh
Ratings = STC: 29, OITC: 24, PG: LC-PG25
Clear Opening = W 14 3/16" x H 42 1/2" Sq. Ft. 4.19
Calculations = Unit Area (Sq. Ft.): 11, Unit Perimeter (nominal in lineal ft): 14'
Other Ratings = CPD: MIL-A-294-12560-00001

Customer Approval: _____

Line: 10 Location: AA U01
 Quantity: 2 Ultra C650, 3510U, FC, Standard Z-Bar, Ext Black Bean / Int White, U-Factor: .30, SHGC: .19, VT: .44
 1/8" SunCoatMAX (Low-E) over 1/8" Clear
 Standard Z-Bar
 Argon Gas Filled
 Tariff

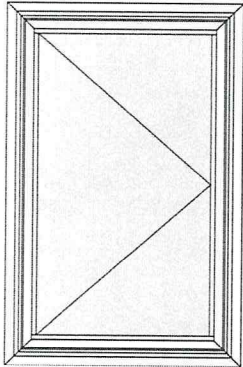


Viewed From Exterior

Model = Casement
 Size = Net Frame: 28 1/8" x 46 1/8"
 Handing = Right
 Energy Star Zone(s) = Southern; Meets Title 24 2019
 Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer
 Glazing = 7/8" OA Dual Glaze with Argon
 Hardware = White, Nesting Fold Down Roto/Stainless Steel Operator Handle
 Screen = Standard with Fiberglass Mesh and White Finish
 Ratings = STC: 28, OITC: 23, PG: LC-PG35
 Clear Opening = W 18 5/8" x H 41 3/8" Sq. Ft. 5.35
 Calculations = Unit Area (Sq. Ft.): 9, Unit Perimeter (nominal in lineal ft): 13'
 Other Ratings = CPD: MIL-A-167-13993-00001

Customer Approval: _____

Line: 11 Location: AA U02
 Quantity: 2 Ultra C650, 3510U, FC, Standard Z-Bar, Ext Black Bean / Int White, U-Factor: .30, SHGC: .19, VT: .44
 1/8" SunCoatMAX (Low-E) over 1/8" Clear
 Standard Z-Bar
 Argon Gas Filled
 Tariff

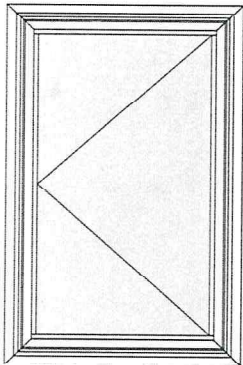

Viewed From Exterior

Model = Casement
 Size = Net Frame: 28 1/8" x 46 1/8"
 Handing = Left
 Energy Star Zone(s) = Southern; Meets Title 24 2019
 Glass = 1/8" SunCoatMAX (Low-E) over 1/8" Clear with Gray EdgeGardMAX Spacer
 Glazing = 7/8" OA Dual Glaze with Argon
 Hardware = White, Nesting Fold Down Roto/Stainless Steel Operator Handle
 Screen = Standard with Fiberglass Mesh and White Finish
 Ratings = STC: 28, OITC: 23, PG: LC-PG35
 Clear Opening = W 18 5/8" x H 41 3/8" Sq. Ft. 5.35
 Calculations = Unit Area (Sq. Ft.): 9, Unit Perimeter (nominal in lineal ft): 13'
 Other Ratings = CPD: MIL-A-167-13993-00001

Customer Approval: _____