


Technical Data Sheet

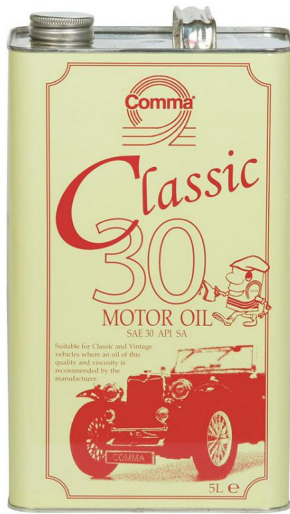

Typical Inspection Data:

Density @ 20°C	0.865 g/cm3
Viscosity @ 100°C (cSt)	12.1 cSt
Flash Point (°C)	250 °C
Pour Point (°C)	-21 °C

Classic Motor Oil 30 Mineral

Recommended by Comma for applications requiring any of the following:

API SA, SAE 30

Product Features:

- A monograde mineral oil with no detergent additive pack for 4 stroke petrol engines. For use where an oil of this quality is recommended.
- Particularly designed for classic and vintage cars but also suitable for other applications requiring a "straight" or additive free SAE 30 motor oil.
- Helps get the car started in winter.
- Stabilises oil pressure at high temperatures.
- May be used in manually operated gearboxes of that period.

Handling:

- Avoid extremes of temperature.
- Product in cardboard cartons must be stored under cover and away from damp conditions

Shelf life:

- 5 years from date of manufacture
- Manufacture date can be identified from an eight digit code printed on the bottle. YYYY.MM.DD

UPDATED: 06.05.2025