
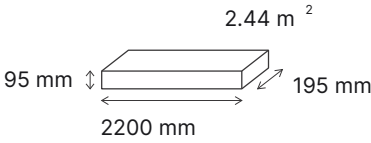


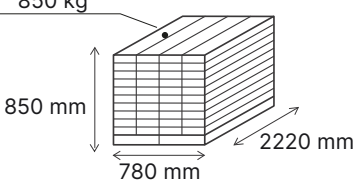





# HARDWOOD FLOORING

## TECHNICAL DETAILS

<b>Project name:</b> Stock		<b>Pattern:</b> Plank 		<b>Color:</b> Satin																
PRODUCT INFO		PACKAGING		STRUCTURE																
Species	White European Oak	<b>BOX</b>		2-layer Engineered Construction *																
Finish	UV Silk			Solid wood 4 mm ** 																
Structure	Engineered (2-layer)			Plywood *** 																
Joint	T&G																			
Bevel	Micro (0,8mm)																			
Surface	Light Brush																			
Grade	Nature	<b>PALLET</b>		* High Balance and Stability																
DIMENSIONS																				
Thickness	15.5 mm																			
Width	185 mm																			
Row Length	2200 mm																			
Shorts	Allowed																			
FINISH		DESCRIPTION																		
Sheen \ Gloss	Semi-gloss	<table border="1" data-bbox="1139 913 1485 1070"> <tr><td>nature</td><td>wood</td><td>small burls</td></tr> <tr><td>authentic</td><td>natural</td><td>oak texture</td></tr> <tr><td>diverse</td><td>color</td><td>variation</td></tr> <tr><td>sapwood</td><td>filled open</td><td>burls</td></tr> <tr><td>brown</td><td>admitted</td><td>tight knots</td></tr> </table> <p>Nature grade looks pretty clean in 185 mm width. Though, any Natural wood might vary. Surface allows reasonable burls, light brown streaks, some restored knots, properly filled open checks and worm holes. Slight imperfections in face work (torn grain) and burns are admitted.</p> 				nature	wood	small burls	authentic	natural	oak texture	diverse	color	variation	sapwood	filled open	burls	brown	admitted	tight knots
nature	wood					small burls														
authentic	natural					oak texture														
diverse	color					variation														
sapwood	filled open					burls														
brown	admitted					tight knots														
Look	Semi-open pores, wire brushed																			
Feeling	Transfer warms of natural wood																			
Type	UV cured modified polyurethane-acrylate																			
Wear resistance	Not rated																			
Scratch resistance	Not rated																			
Slip resistance	50 (SRV dry)																			
Resistance to chemical agents	Class 5 (Except blue ink)																			
Maintanance	Maintanance free																			
Repairability	Easy																			
TECHNICAL INFORMATION																				
<b>Characteristics (EN 14342)</b>		<b>Deviations (EN 13489)</b>																		
Formaldehyde emission class	E1; ULEF	Deviation on Thickness	0,2 mm																	
Pentachlorophenol content	None	Deviation on Width	0,2 mm																	
Thermal resistance	0,118 m2 K\W	Height Difference	<0,2% of width																	
Thermal conductivity	0,161 W\m K	Cup	<0,2% of plank width																	
Fire resistance	Dfl-s1	Bow	<0,1% of plank lenght																	
		Spring	<0,5% of lenght																	

## PRODUCT USE

INSTALLATION		STORAGE & USE	
 <p>Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Semifloation installation as well. Applicable above, on and below ground level.</p>		 <p>Air Humidity 40-65% Temperature +18°C ... +22°C (64°F ... 72°F)</p>	
CARE & MAINTANENCE		DESCRIPTIONS & IMAGERY	
<p>Maintenance of hardwood Floors with UV Silk assumes regular (daily if necessary) cleaning from dust and grit using a vacuum, followed by a thorough cleaning with floor cleaner. Floor surface areas that receive the most traffic and get worn down quicker, such as areas by the front door, hallways, kitchens etc., should be periodically renewed with oil.</p>		<p>Flooring colors displayed in digital platforms may vary according to the color settings of the monitor you are using.</p>	