



LEADING AUSTRALIA TO A
SAFER TOMORROW



TR3 TRIPOD KIT

The TR3 tripod is for fall protection in confined spaces.

It is made from durable alloy (lightweight and tough).


Provides:

- Anchorage for suspended work.
- Fall arrest point for accessing with a ladder.
- Anchorage for one winch operative/supervisor.





LEADING AUSTRALIA TO A SAFER TOMORROW

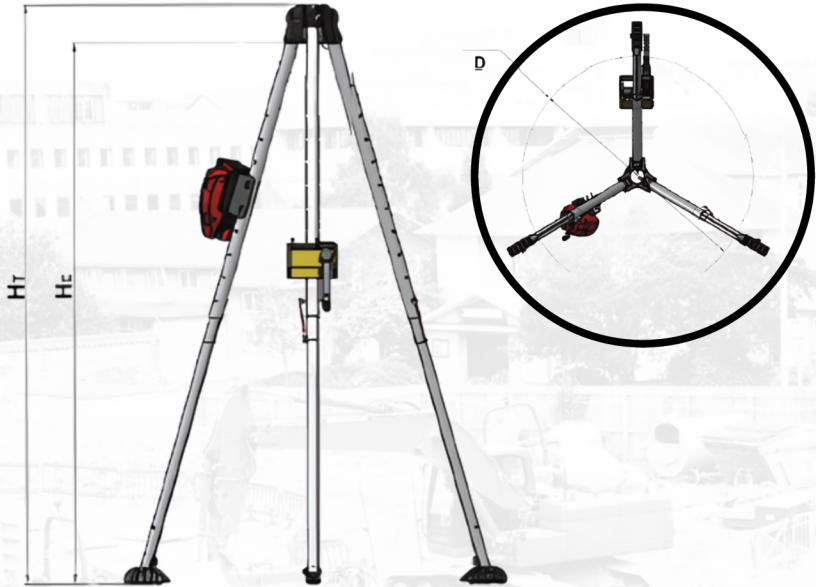

Position A - Max extension with bracket fitted
Position B - Min extension with bracket fitted
Position C - Min extension - no bracket (connect to eyebolt only)

Position	HT	HE	D
A	2388	2210	1422
B	1803	1600	991
C	1803	1600	991

All measurements in mm
HT - Height to top of crown
HE - Height to bearing point of eyebolt
D - Diameter to inside of feet

STANDARDS
• EN795:2012
• ISO9001
MADE IN THE UK

TR3 TRIPOD KIT



Crown Detail
As standard, the TR3 comes with 2 x spring loaded pulleys and 1 x eyebolt.



Auto Locking Leg
Legs are locked in the open position automatically during use and easily disengage for folding.



FABXR and FABXR-DB
The TR3 can be fitted with FABXLR and FABXR-DB/FABXLR-DB for emergency rescue with the user descender via a ladder.



WG-01 Hand Winch
The TR3 tripod can be fitted with a 20mt worm gear winch, in conjunction with FABXR for suspended work.



Captive Pins
Legs are height adjustable using detent pins, which are secured to the tripod using PVC coated keeper wires.



Robust Pivoting Spiked Feet
The TR3 is fitted with pivoting feet with hot bonded rubber soles for soft or hard surfaces. Includes slot for anti-splay webbing strap.

Features

- Height Adjustable**
See table
- Footprint Diameter**
See table
- Folded Length**
1.5m (excluding bag)
- Anti-splay Webbing**
Anti-splay webbing prevents the tripod legs from splaying under load

- Materials**
Legs- Aluminum alloy
Crown - powder coated cast Aluminum
Pins & fixings - steel or stainless steel
- User Weight**
Fall Arrest: Single user max 141kg.
If used in assisted rescue, maximum combined worker capacity: 281kg
Goods carrying: 250kg

