


GULF LIGHT



LED EMERGENCY LIGHTINGS

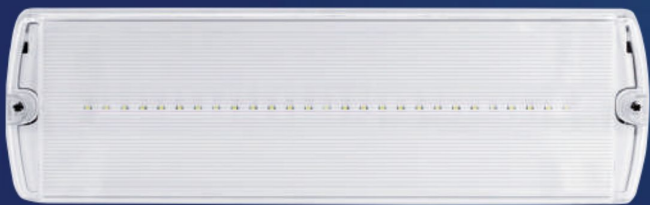

GULF FIRE FIGHTING EQUIPMENTS FZE

P.O.Box 262329 Jebel Ali Free Zone, Dubai , United Arab Emirates

Tel: +971 4880 7127 - Fax: +971 4880 7604

Email: info@gulffireco.com www.gulffireco.com



GL-EX4 / LED

- Maintained EXIT Light
- Light Source: 12 Pcs SMD5050
- Luminous Flux >150 LM CCT 6500K
- Supply: 220 V to 240V / 50 Hz
- Battery: Nicd SC 3.6V 2000 MAh
- Emergency Duration: > 3 Hours
- Charging Time: < 24 Hours
- Input Power: 4.5W
- IP Rating : IP 20
- Powder Coated Steel Frame
- Wall & Ceiling Mounted
- Dimensions: 250 x 190 x 60 mm



GL-EX5 / LED

- Maintained EXIT Light
- Light Source: 24 Pcs SMD4014
- Emergency Luminous Flux > 22 LM
- Supply: 220 V to 240V / 50 Hz
- Battery: LiFePO4 3.2V 1500 mAh
- Emergency Duration: > 3 Hours
- Charging Time: < 24 Hours
- Input Power: 5.5W
- IP Rating: IP 40
- Powder Coated Steel Frame
- Universal Mounting: Wall / Ceiling / Flag / Suspend / Hanging / Recessed Mounting
- Dimensions: 290 x 182 x 40 mm



GL-EX6 / LED



- MAINTAINED EXIT LIGHT
- LIGHT SOURCE: 44 Pcs SMD2835 LED 8W
- SUPPLY: 85 to 265V AC / 50 Hz
- BATTERY: Ni-Cd 3.6V 1.6 Ah
- EMERGENCY DURATION: > 3 Hours
- CHARGING TIME: 24 Hours
- SIZE: 450 x 225 x 65 mm
- IP RATING: IP20
- MATERIAL: POWDER COATED STEEL FRAME

GULF FIRE FIGHTING EQUIPMENTS FZE

P.O.Box 262329 Jebel Ali Free Zone, Dubai , United Arab Emirates

Tel: +971 4880 7127 - Fax: +971 4880 7604

Email: info@gulffireco.com www.gulffireco.com




GL-EM5 / LED

- Non-Maintained Emergency Light
- Light Source: 27 Pcs SMD2835
- Luminous Flux >150 LM CCT 6500K
- Supply: 220 V to 240V / 50 Hz
- Battery: Lithium 3.7V / 1500 mAh
- Emergency Duration: > 3 Hours
- Charging Time: < 24 Hours
- Input Power: 3.5W
- IP Rating: IP 65
- Fire Proof Poly Carbonate
- Wall & Ceiling Mounted
- Dimensions: 352 x 110 x 68 mm


**GL-EM6 / LED**

- Non-Maintained Emergency Light
- Light Source: 27 Pcs SMD2835
- Emergency Luminous Flux >150 LM CCT 6500K
- Supply: 220 V to 240V / 50 Hz
- Battery: Ni-Cd SC3.6V / 1500 mAh
- Emergency Duration: > 3 Hours
- Charging Time: < 24 Hours
- Input Power: 5W
- IP Rating : IP 65
- Fire Proof Poly Carbonate
- Wall & Ceiling Mounted
- Dimensions: 352 x 110 x 68 mm

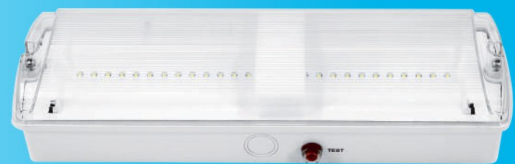

GL-EM8 / LED

- Non-Maintained Emergency Light
- Light Source: 50 Pcs SMD2835
- Luminous Flux > 200 LM CCT 6500K
- Supply: 220 V to 240V / 50 Hz
- Battery: Ni-Cd 3.6V 2000 mAh
- Emergency Duration: > 3 Hours
- Charging Time: < 24 Hours
- Input Power: 8.5W
- IP Rating : IP 65
- Fire Proof Poly Carbonate
- Wall & Ceiling Mounted
- Dimensions: 352 x 110 x 68 mm

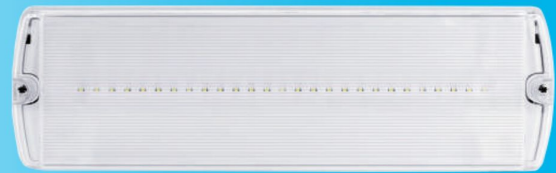**GL-EM7 / LED**

- Non-Maintained Emergency Light
- Light Source: 27 Pcs SMD2835
- Luminous Flux >150 LM CCT 6500K
- Supply: 220 V to 240V / 50 Hz
- Battery: LiFePO4 3.2V 1500 mAh
- Emergency Duration: > 3 Hours
- Charging Time: < 24 Hours
- Input Power: 3.5W
- IP Rating : IP 65
- Fire Proof Poly Carbonate
- Wall & Ceiling Mounted
- Dimensions: 352 x 110 x 68 mm

