
21.5" Hover Touch Overlay (HTO-21)

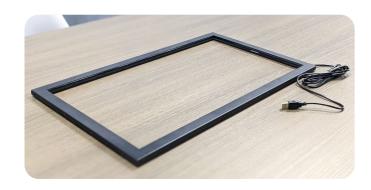

Key Features:

- Edge-based Contactless Touch Upgrade Kit
- Plug & Play Design for Multiple Platforms
- Haptics Design for Enhanced User Experience
- Supports Portrait & Landscape Modes
- Omni Industry Self-Service Application
- Access to Customer Education Graphics Library

_									•			
S	n	ρ	C	ΙŤ	Т	c	ล	t	ı	റ	r	۱۹
_	М	_	-			•	~	•	•	_	•	

Touch Type	Hover (Air) Touch					
Size Support	21.5″ 16:9					
Response Time	125RPS (30ms touch / 12ms draw)					
Haptic Feedback	LED / Visual / Sound visual haptic (GUI) will be provided upon request					
Interface	USB 2.0 HID					
Input Method	Finger / Gloved / Stylus (7mm+)					
Operating Voltage	DC 5V±5% (via USB)					
OS Support	Windows / Linux / Android					
Certifications	CE / FCC class B					
Mounting	Tape Mount / Screw Mount					
Application	Indoor / Semi-Outdoor					

Order Information

Part Number	Description					
HTO-21-H3U	21.5" 16:9 hover frame / 3-tier haptic design: LED + visual + sound / USB2.0 Type A connectivity (180cm) / enhanced IR sensor arrays / proprietary light filter / metallic black coating finish					
HTO-Mount-L1	L shape screw mount bracket / 2CM height / 16 screw points to surface / 8 screw points to HTO					
HTO-Mount-L2	L shape tape mount bracket / 2CM height / 175cm ² tape contact surface / 8 screw points to HTO					
HTO Tailored Services						
Calibration Service	Remote touch calibration service can be requested					
Custom Service 1	Color customization with MOQ = 200 units					
Custom Service 2	Bracket customization without MOQ					

