## 49.8" Hover Touch Overlay (HTO-50)



## Key Features:

- Edge-based Contactless Touch Upgrade Kit
- Plug & Play Design for Multiple Platforms
- Haptic Design for Enhanced User Experience
- Supports Portrait & Landscape Modes
- Omni Industry Self-Service Application
- Access to Customer Education Graphics Library

Touch Type	Hover (Air) Touch
Size Support	49.8″ 16:9
Response Time	125RPS (30ms touch / 12ms draw)
Haptic Feedback	For <24" : LED / Visual / Sound For >24" : Visual / Sound (LED Optional)
Interface	USB 2.0 HID
Input Method	Finger / Gloved / Stylus (7mm+)
Operating Voltage	DC 5V±5% (via USB)

**Specifications** 

Windows / Linux / Android

CE / FCC class B


Tape Mount / Screw Mount


Indoor / Semi-Outdoor

	P
w)	Н
d ional)	
,	Н
+)	
	Н
	O
	С
	С

## Order Information

Part Number	Description	
HTO-50-H2U	49.8" 16:9 hover frame / 2-tier haptic design: visual + sound / USB2.0 Type A connectivity (180cm) / enhanced IR sensor arrays / proprietary light filter / metallic black coating finish	
HTO-Mount-L3	L shape screw mount bracket / 2CM height / 16 screw points to surface / 8 screw points to HTO	
HTO-Mount-L4	L shape tape mount bracket / 2CM height / 266cm <sup>2</sup> tape contact surface / 8 screw points to HTO	
HTO Tailored Services		
Calibration Service	Remote touch calibration service can be requested	
Custom Service 1	Color customization with MOQ = 200 units	
Custom Service 2	Bracket customization without MOQ	

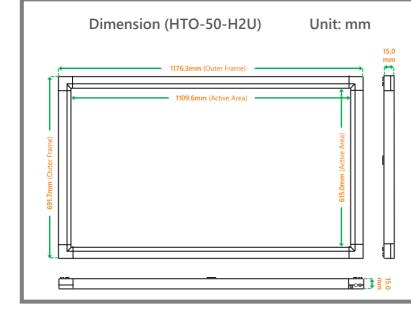

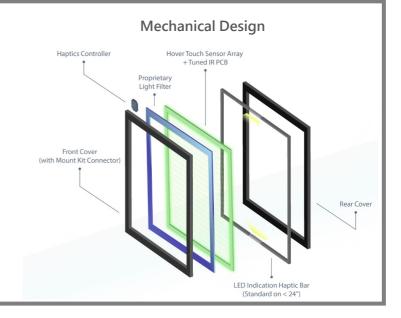



**OS Support** 

Certifications

Mounting

Application

