


# 30" Transparent OLED Embedded (TOLED-30-DE)

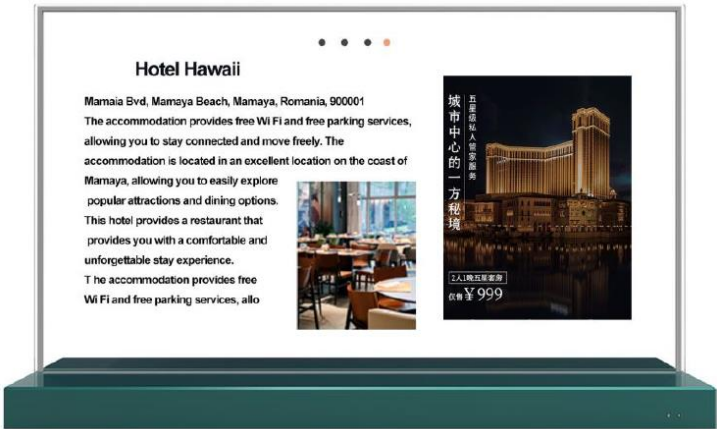

## Key Features :


- Self-Luminous OLED Technology
- High Dynamic Contrast for More Color Depths
- High Refresh Rate, Low Imagery Latency
- No Backlight, No Light Leak
- Ultra-Thin Display, Desk Embedded Form Factor
- Rear Side Optical Blur for Enhanced Privacy
- KOGI Display Firmware Support Services

## System Specifications

Display	30" Transparent Display
Type	OLED
Transparency	43% (Typ.)
Reflection	20% (Typ.)
Contrast	135,000:1 (Dynamic)
Ratio	16 : 9
Resolution	1366 x 768
Display Area	664 x 371 mm
Viewable Angle	178 degree
Brightness	200 – 600 nits
Color Hue	10 bit, 1.07 billion colors
Color Range	108%

Response Time	0.1 millisecond (gray to gray)
Life Expectancy	30,000 Hours (Typ.)
Refresh Rate	120 Hz
Input/Output	RS-232-IN*1, RS-232-OUT*1, HDMI*2, USB*1
Touch	No (Optional: KOGI HTO Hover Touch)
Environment	Temperature: 0-40°C ; Humidity: 20-80%
Certifications	CE / FCC / CCC / RoHS
Display Dimension	671.1 x 385.3 mm
System Dimension	681 W x 424 H x 147 D mm
Package Details	806 x 578 x 266 mm   Gross Weight : 11KG
Power Consumption	Operating: ≤80W (Typ.) , Off: 0.5W
Power Type	DC24V
Accessory	Flat Stand, Remote Control, Power Cable

## TOLED-30-DE Dimension

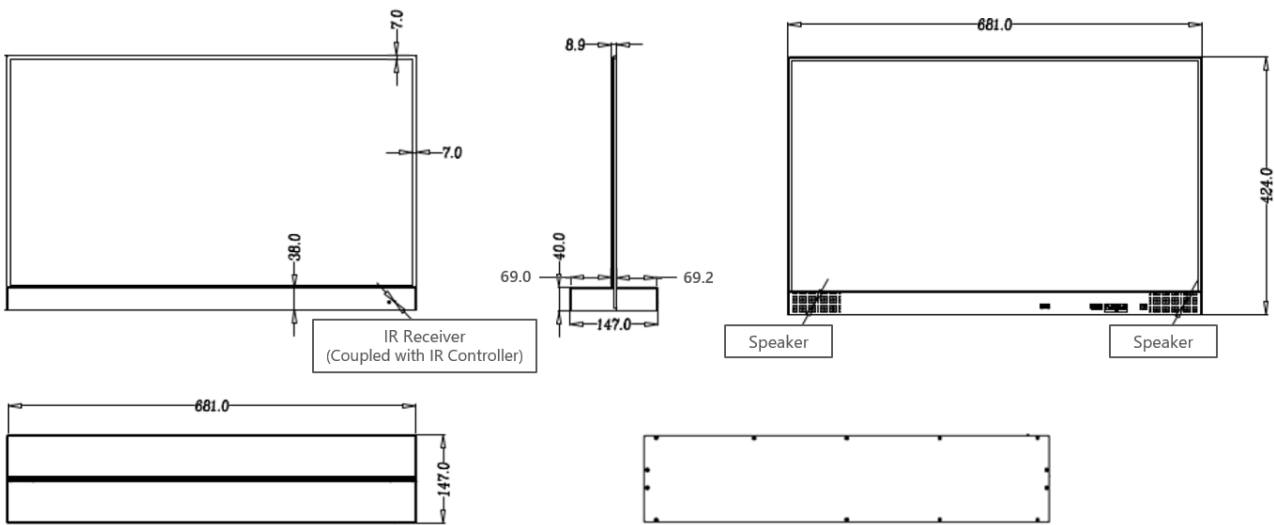

INNOVATION IN AI & IOT DESIGNS

KOGI Corporation | Address: 7F #335 Ruiguang Road, Neihsu Dist., Taipei, Taiwan R.O.C.

Phone #: +886-2-2799-8808 | Web: <https://www.kogicorp.com> | Email: [inquiry@kogicorp.com](mailto:inquiry@kogicorp.com)



Visit our Website