

55" Transparent OLED Floor-L (TOLED-55-FL)



Key Features :


- Self-Luminous OLED Technology
- High Dynamic Contrast for More Color Depths
- High Refresh Rate, Low Imagery Latency
- No Backlight, No Light Leak
- Ultra-Thin Display, Desk Flat Stand Form Factor
- Rear Side Optical Blur for Enhanced Privacy
- KOGI Display Firmware Support Services

System Specifications

Display	55" Transparent Display
Type	OLED
Transparency	40% (Typ.)
Reflection	20% (Typ.)
Contrast	150,000:1 (Dynamic)
Ratio	9 : 16
Resolution	1080 x 1920
Display Area	1209.6 x 680.4
Viewable Angle	178 degree
Brightness	200 – 600 nits
Color Hue	10 bit, 1.07 billion colors
Color Range	108%

Response Time	0.1 millisecond (gray to gray)
Life Expectancy	30,000 Hours (Typ.)
Refresh Rate	120 Hz
Input/Output	RS-232-IN*1, RS-232-OUT*1, HDMI*2, USB*1
Touch	No (Optional: KOGI HTO Hover Touch)
Environment	Temperature: 0-40°C ; Humidity: 20-80%
Certifications	CE / FCC / CCC / RoHS
System Dimension	1781.8H x 772W x 353D mm
Package Details	1985H x 930W x 487D mm GW: 67KG
Power Consumption	Operating: ≤150W (Typ.) , Off: 0.5W
Power Type	AC 100-240V
Accessory	Floor Stand, Remote Control, Power Cable

TOLED-55-FL Dimension

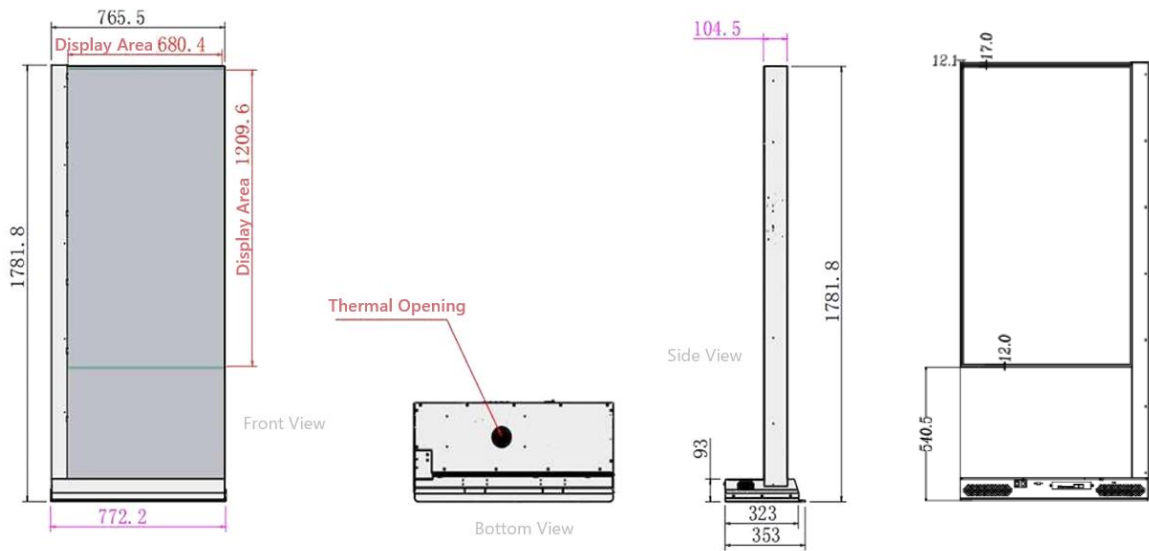

INNOVATION IN AI & IOT DESIGNS

KOGI Corporation | Address: 7F #335 Ruiguang Road, Neihu Dist., Taipei, Taiwan R.O.C.
Phone #: +886-2-2799-8808 | Web: <https://www.kogicorp.com> | Email: inquiry@kogicorp.com



VISIT OUR WEBSITE