





Driven Tool holder

(Doosan 1809)

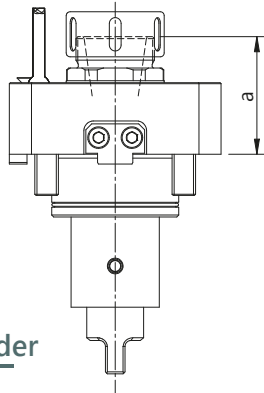

Straight driven Tool holder

Type	ER	a NL(mm)	coolant supply	speed (rpm)	gear ratio i=n1:n2	Specs
BMT45	25	51	ext. 5~80BAR	6000	1	BMT45-1809-25
	25	57	int. 5~80BAR	6000	1	BMT45-1809-25
BMT55	25	51	ext. 5~80BAR	6000	1	BMT55-1809-25
	25	51	int. 5~80BAR	6000	1	BMT55-1809-25
BMT65	32	60	ext. 5~80BAR	6000	1	BMT65-1809-32
	32	60	int. 5~80BAR	6000	1	BMT65-1809-32
BMT75	40	64.5	ext. 5~80BAR	5500	1	BMT75-1809-40
	40	64.5	int. 5~80BAR	5500	1	BMT75-1809-40
BMT85	50	102	ext. 5~80BAR	5000	1	BMT85-1809-50

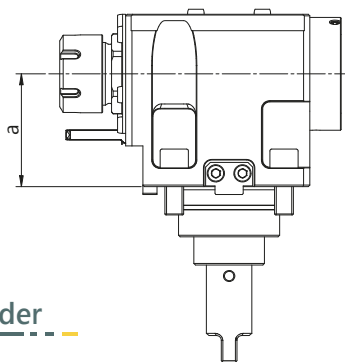

90° driven Tool holder

Type	ER	a NH(mm)	coolant supply	speed (rpm)	gear ratio i=n1:n2	Specs
BMT45	25	65	ext. 5~80BAR	6000	1	BMT45-1809-25-65
	25	65	int. 5~80BAR	6000	1	BMT45-1809-25-65
	25	85	ext. 5~80BAR	6000	1	BMT45-1809-25-85
BMT55	25	70	ext. 5~80BAR	6000	1	BMT55-1809-25-70
	25	70	ext. 5~80BAR	6000	1	BMT55-1809-25-70
	25	85	int. 5~80BAR	6000	1	BMT55-1809-25-85
BMT65	32	72	ext. 5~80BAR	6000	1	BMT65-1809-32-72
	32	72	int. 5~80BAR	6000	1	BMT65-1809-32-72
BMT75	40	60	ext. 5~80BAR	5500	1	BMT75-1809-40-60
	40	60	int. 5~80BAR	5500	1	BMT75-1809-40-60
BMT85	50	110	ext. 5~80BAR	5000	1	BMT85-1809-50-110