



INDUSTRIAL ✕ AGROINDUSTRIAL ✕ MARITIMO



10 Años de Servicio y Calidad

CODIBE S.A inició sus actividades en 2013 por lo cual ya cuenta con más de 10 años de presencia y trayectoria en el mercado. Desde el comienzo de nuestras actividades, nos especializamos en el suministro de productos y equipos relacionados al ensamble de cables de control en la parte automotriz, industrial y marina, con representación en el mercado exterior bajo la marca **FLEXOCABLE**.

Con el transcurso de los años hemos incorporado nuevas líneas de productos en la parte Automotriz, Industrial y Marina, con el objetivo de proveer a nuestros clientes una solución integral a sus necesidades.

Contamos con un excelente grupo humano el cual se capacita en forma permanente a fin de estar actualizado en los cambios e innovaciones tecnológicas que se presentan en nuestro ámbito.

Nuestro objetivo principal es lograr una permanente mejora en nuestras actividades a fin de dar un servicio que asegure una entrega en tiempo y forma con su correspondiente asesoramiento, soporte técnico y su posterior servicio.





NUESTRA PRESENCIA



FLV - VERY LIGHT DUTY


TT- ASSEMBLY TYPE



RR- ASSEMBLY TYPE




TR- ASSEMBLY TYPE



ROD END	3/16 X 32 NF
CONDUIT CAP	7/16
CONDUIT	8.5 MM
INNER MEMBER	7.64

WORK LOAD- LBS							
PULL	PUSH						
	INCHES						
	1"	2"	3"	4"	5"	6"	
120	80	80	70	60	45	30	

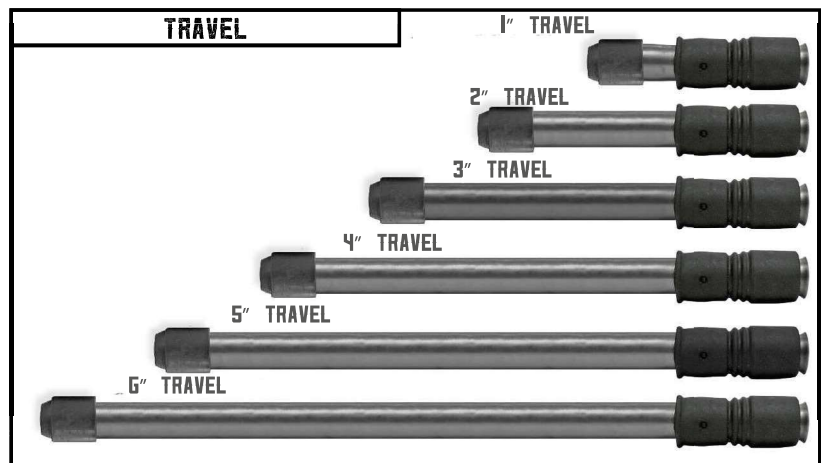

FLL - LIGHT DUTY

TT- ASSEMBLY TYPE



RR- ASSEMBLY TYPE



TR- ASSEMBLY TYPE



ROD END	1/4 X 28 NF
CONDUIT CAP	5/8
CONDUIT	13 MM
INNER MEMBER	1/8

WORK LOAD- LBS						
PULL	PUSH					
	INCHES					
	1"	2"	3"	4"	5"	6"
230	150	150	125	100	75	50

TRAVEL

1" TRAVEL

2" TRAVEL

3" TRAVEL

4" TRAVEL

5" TRAVEL

6" TRAVEL

FLM - MEDIUM DUTY

TT- ASSEMBLY TYPE



RR- ASSEMBLY TYPE




TR- ASSEMBLY TYPE



ROD END	5/16 X 24 NF
CONDUIT CAP	11/16
CONDUIT	15,5 MM
INNER MEMBER	3/16

WORK LOAD- LBS						
PULL	PUSH					
	INCHES					
	1"	2"	3"	4"	5"	6"
400	250	250	210	170	130	110

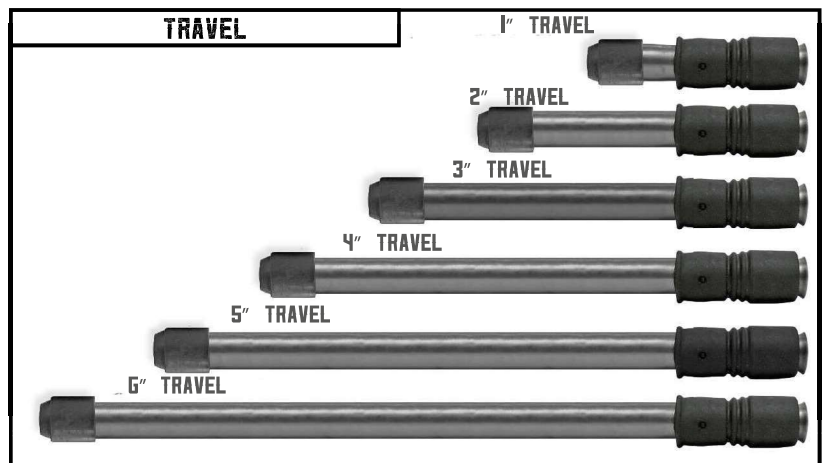

FLH - HEAVY DUTY

TT- ASSEMBLY TYPE



RR- ASSEMBLY TYPE




TR- ASSEMBLY TYPE




ROD END	3/8 X 24 NF
CONDUIT CAP	7/8
CONDUIT	17,5 MM
INNER MEMBER	1/4

WORK LOAD- LBS						
PULL	PUSH					
	INCHES					
	1"	2"	3"	4"	5"	6"
1000	700	700	600	500	400	300

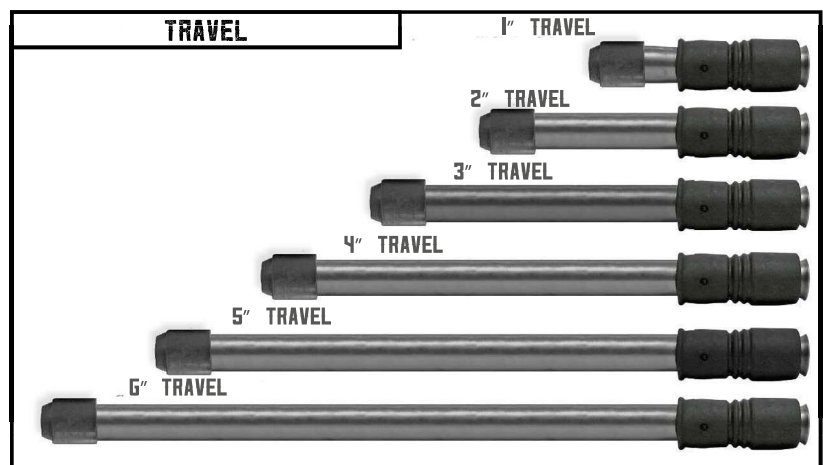


CONDUIT

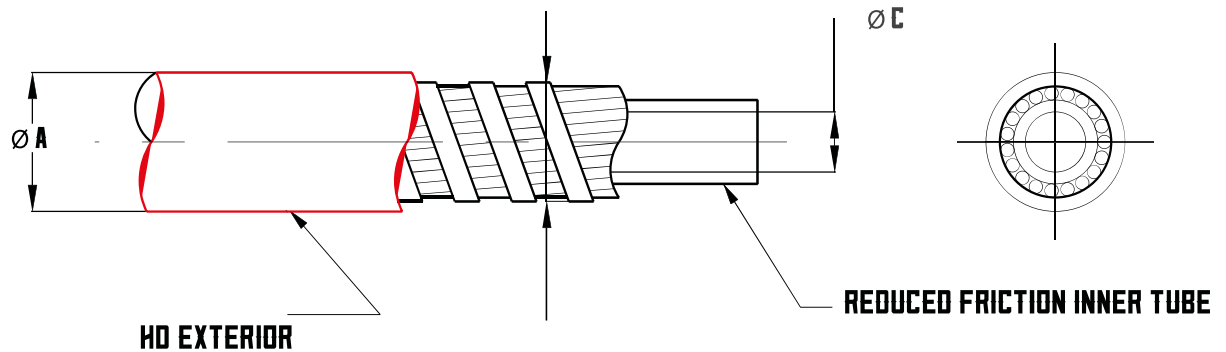

PART NO.	DESCRIPTION	Ø A ±0.2	Ø B ±0.2	Ø C±0.1 (CONO. INTER)	COLOR	WEIGH. KG/MTR
FLV-UCO-DFX	VLO UTILITY	8,65	6,90	3,20	ROJO	0,140
FLL-UCO-DFX	LD UTILITY	13,10	10,00	3,60	ROJO	0,280
FLM-UCO-DFX	MD UTILITY	15,10	11,40	5,05	ROJO	0,360
FLH-UCO-DFX	HD UTILITY	17,10	14,00	6,50	ROJO	0,445

SS FLAT WRAPPED ARMORED INNER MEMBER

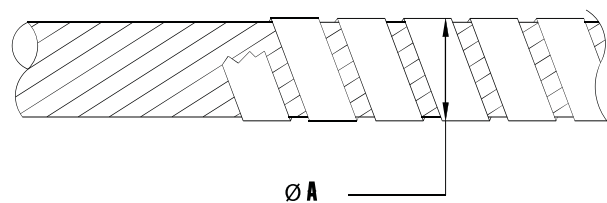

PART NO.	Ø A ±0.1	WT./MTR GM/MTR
FLV-UIN-DFX	2,70	40,0
FLL-UIN-DFX	3,20	56,0
FLM-UIN-DFX	4,60	124,0
FLH-UIN-DFX	6,00	215,0



REF.	DESCRIPTION
FLC-005	CLEVIS 3/16X32NF
FLC-005A	CLEVIS 5MMX0.8




REF.	DESCRIPTION
FLC-006	CLEVIS 1/4X28NF
FLC-006A	CLEVIS 6MMX1.0



REF.	DESCRIPTION
FLC-008	CLEVIS 5/16X24NF
FLC-008A	CLEVIS 8MMX1.25



REF.	DESCRIPTION
FLC-010	CLEVIS 3/8X24NF
FLC-010A	CLEVIS 10MMX1.5



REF.	DESCRIPTION
FLSP-005	PIN CLEVIS 3/16



REF.	DESCRIPTION
FLSP-006	PIN CLEVIS 1/4



REF.	DESCRIPTION
FLSP-008	PIN CLEVIS 5/16



REF.	DESCRIPTION
FLSP-010	PIN CLEVIS 3/8



REF.	DESCRIPTION
PHS 5X5	5MM X BOLT 5 MM
PHS 6X6	6MM X BOLT 6MM
PHS 6X8	6MM X BOLT 8 MM
PHS 6LX6	6MM LEFT THD. X BOLT 6MM
PHS 6LX8	6MM LEFT THD. X BOLT 8MM
PHS 8X8	8MM X BOLT 8MM
PHS 8LX8	8MM LEFT THD. X BOLT 8MM
PHS 10X1.25	10MM X BOLT 10X 1.25
PHS 10LX1.25	10MM X LFT THD. M10X 1.25
PHS 10X1.5	10MM X BOLT 10X 1.5
PHS 10X8	10MM X BOLT M 8
PHS 10LX8	10MM X BOLT LFT M 8
PHS 10LX1.5	10MM X LEFT X 1.5



REF.	DESCRIPTION
PHS 5	5MM X 0.8
PHS 6	6MM X 1
PHS 6L	6MM LEFT THD X 1
PHS 8	8MM X 1.25
PHS 8L	8MM LEFT THD X 1.25
PHS 10	10MM X 1.25
PHS 10L	10MM LEFT THD X 1.25
PHS 12	12MM X 1.75
PHS 12L	12MM LEFT THD X 1.75
PHS 12-1.25	12MM X 1.25



REF.	DESCRIPTION
RS1003	SPRING BEARING 6MM





CONTROL HEADS



INDUSTRIAL
CONTROL CABLES



CODIGO	DESCRIPCION
FLX-100	ADJUSTABLE MICRO CONTROLLER

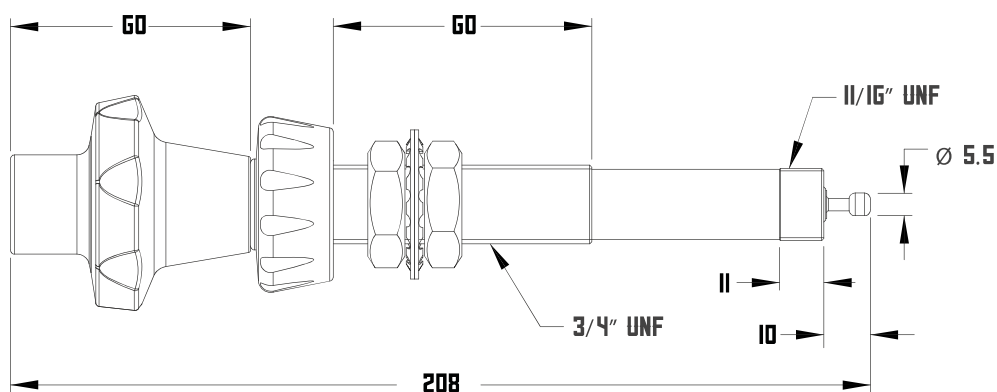

- ✘ MATERIAL : BRASS
- ✘ QUICK DISCONNECT TYPE.
- ✘ MAX. TRAVEL = 76MM
- ✘ MAX. LOAD = 30 KGF
- ✘ ALL DIMENSIONS IN MM.




CONTROL HEADS



INDUSTRIAL
CONTROL CABLES



CODIGO	DESCRIPCION
FLX-200	ADJUSTABLE CONTROL LEVER

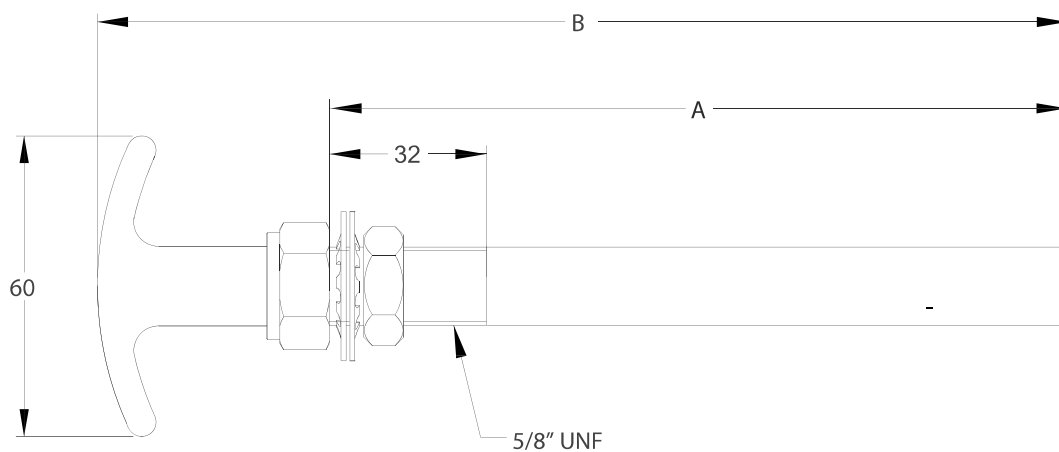


- ✘ MATERIAL : ALUMINIUM
- ✘ LOCKING AT 1/8 TURN IN EITHER SIDE.
- ✘ BODY : AL 6063 T5
- ✘ MAX. TRAVEL = 3", 4", 5" (INCH).
- ✘ MAX. LOAD = 10 KGF
- ✘ ALL DIMENSIONS ARE IN MM.

RECORRI. (INCH)	A	B
3	150	195
4	175	220
5	200	245

CONTROL HEADS



CODIGO	DESCRIPCION
FLX-300	CUT OFF CONTROLLER

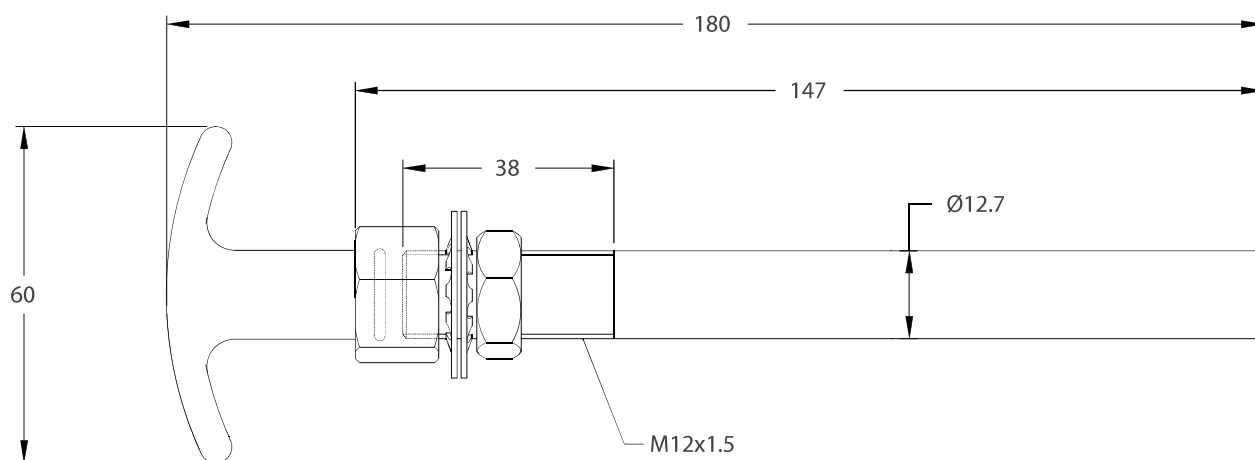

- ✘ MATERIAL : ENIA
- ✘ MAX. TRAVEL = 76MM
- ✘ MAX. LOAD = 30 KGF
- ✘ ALL DIMENSIONS ARE IN MM.
- ✘ SUITABLE FOR FLV CABLE.