
185 Light Tackle





Specifications

18'-4" Length Overall 7'-0" Beam 11" Draft Boat Weight (Approx.) 1560Lbs. Maximum Horsepower 150 Transom Height 20" **Fuel Capacity** 35 Gal. Deadrise Varies Interior Freeboard 19.5"

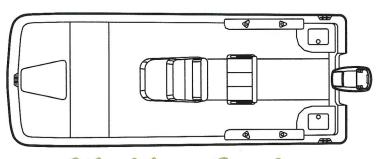





Features

- Self Bailing Cockpit
- Lockable Console Storage Area
- 360 Qt. Insulated Full Beam Fish Box
- Integrated Anchor and Rope Locker
- 2 44 Qt Aerated Livewells
- Above Deck Battery / Oil Tank Storage
- 52 Sq. Ft Cockpit
- 29 Sq. Ft Forward Fishing Deck
- Raw Water Washdown System
- 35 Gal. Below Deck Fuel Tank
- 4 Gunnel Mount S.S. Rod Holders
- 3 Rod Vertical Storage Rack
- Recessed 6" S.S. Cleats
- Stable Cathedral Hull Design

Options

- Bimini Top
- Bow Cushions
- Livewell Cushion Set
- Poleing Platform
- Automatic Bilge Pump
- Removable Bow Fishing Chair
- Trolling Motor Wiring

Performance Bulletin

Test performed and certified by Yamaha application engineers

YPB#: TEST DATE: 01162-MKC-Z 5-07-01

McKee Craft WWW.mckeecraft.com THE UNSINKABLES




PO Box 623 Fairmont, NC 28340 (910) 628-0926 www.McKeeCraft.com



F115 TLRZ

PERFORMANCE CURVE AND DATA

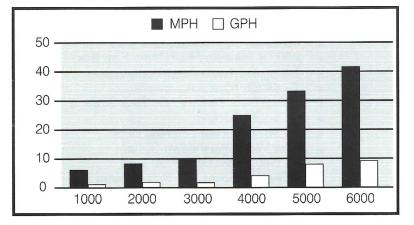

RPM	MPH	GPH	MPG	Db
1000	3.95	0.6	6.58	61
2000	6.3	1.5	4.20	69
3000	9.8	2.6	3.77	80
4000	24.8	4.0	6.20	83
5000	33	6.5	5.08	88
6000	40.6	10.1	4.02	93

NOTE: Data may vary due to changes in weather, elevation, load, and boat bottom conditions. Fuel data gathered with Yamaha Fuel Management System. Speed data gathered with Magellan GPS receiver.

SPECIFICATIONS

BOAT MODEL:	185 Light Tackle
LENGTH:	18' 4"
BEAM:	7'
WEIGHT:	1,560 lbs.
MAX H.P.:	160
TRANSOM HT.:	20"

FUEL CAPACITY: 35
WEIGHT AS TESTED: 2,721 lbs.

ENGINE:

MODEL: F115TLRZ HORSEPOWER: 115

DISPLACEMENT: 106.2 Cu. In. INDUCTION: E.F.I. WEIGHT: 418 lbs.

GEAR RATIO: 2.15
MOUNTING HEIGHT: #3

PROPELLER (DIA/PITCH): **13" X 17" S/S**PROPELLER PART #: **688-45930-02-98**

TEST CONDITIONS:

NO. OF PEOPLE:	2			
SECONDS TO PLANE:	3.19			
AIR TEMP:	75 °			
WATER TEMP:	73°			
ELEVATION:	Sea Level			
WIND VELOCITY:	5-10 MPH			
COMMENTS:	Tested with full			
tank of fuel, one group-24 battery, safety				

and test gear.

