



Prepared by:
Doug Minerva
President
856-287-1918
invisiblearmorcoatings@gmail.com

INVISIBL

Armor Coating - Whiteboard Products

Residential - Commercial - Industrial

**THE ONLY PRODUCT
OF ITS KIND!**

**EASY TO APPLY &
VERY USER-FRIENDLY**



01

What is **INVISIBL**?

INVISIBL is a **NEW & INNOVATIVE** protective covering product. It is a **MULTI-SURFACE** protectant that is perfect for indoor, outdoor, and for commercial application usage. It **PROTECTS** walls, doors, floors, and more with a **INVISIBLE** armor coating.

It comes available in a one or two component application and in both satin and gloss finishes. This unique armor coating also does not change any fire ratings.

Our different formula's can be blended and mix different benefits depending on your desired goals. We are also testing several other ways **INVISIBL** can protect.



02

Product Features **INVISIBL**

- ✓ SCUFF RESISTANT
- ✓ ECO-FRIENDLY
- ✓ UV INHIBITORS
- ✓ LOW ODOR
- ✓ CHEMICAL RESISTANT
- ✓ COST EFFECTIVE
- ✓ ANTIMICROBIAL
- ✓ UV/FADE RESISTANT
- ✓ LEED & PROP 65 COMPLIANT
- ✓ SCRUB CYCLE OF 1600-5000+
- ✓ QUICK DRY TIME

Primary Uses
INVISIBL

- PAINTED WALLS
- WALL COVERINGS
- DIGITAL WALL COVERINGS
- DIMENSION WALL PANELS
- VINYL OR RUBBER FLOORING
- ANY DOOR SURFACE
- VINYL SIDING
- VCT (TO REPLACE WAX)

03



**RESIDENTIAL
COMMERCIAL
INDUSTRIAL
& PRODUCT APPLICATION**

- SCUFF RESISTANT
- USE IN PLACE OF WAX
- CHEMICAL RESISTANT
- LOW MAINTENANCE
- NO BUFFING REQUIRED
- VCT
- LUXURY VINYL TILE
- RUBBER FLOORS
- WELDED FLOOR SYSTEMS
- TERRAZZO FLOORS
- SINGLE OR TWO COMPONENT
- QUICK DRY TIME (SINGLE COMPONENT)
- 13 MINUTES TO TOUCH
- 1 HOUR TO WALK ON

04

Flooring Usage Info

INVISIBL



Delay costly replacement maintenance by using INVISIBL to protect flooring of all types.

CHECK OUT THE AWESOME PROTECTION POWER OF INVISIBL ARMORS

A wall covering is protected from graffiti.

- https://www.youtube.com/watch?v=bMk4gJZs_Pc

A dimension wall is protected from graffiti.

- <https://youtu.be/3q8ulqELs6o>

A wall covering is protected from vacuum scuff marks.

- <https://youtu.be/m5ccQZxyOHo>

A wall covering is protected from scrubbing.

- <https://youtu.be/X0VsW-XA3vo>

An acoustical panel is protected from red wine.

- Part #1 - <https://youtu.be/9zrEptc8h-k>
- Part #2 - https://youtu.be/a76fnr4_vxo

Packaged Product

INVISIBL

ONE COMPONENT:

- GLOSS OR SATIN FINISH
- 1 OR 5 GALLON CONTAINERS

TWO COMPONENT:

- GLOSS OR SATIN FINISH
- 1 ½ GALLON CONTAINER
- 2:1 RATIO MIXTURE

06



Part A and Part B Description:

Satin-Finish, easy application, dry-erase coating done in two coats.

Inspection:

Substrate must be clean, dry and free of any foreign material that will prevent proper adhesion. Failure to adhere to these guidelines can result in a poor finish. Testing on a small area before applying is recommended.

Surface Preparation:

For best results, apply over a freshly painted and thoroughly dried surface (ideally 24 hours). If surface has imperfections (such as nail holes, cracks, peeling paint, etc.) repair and prep wall as you would for any paint application.

Mixing:

Thoroughly stir Part B separately prior to mixing together. Once mixed, add 1 Part A with 2 Parts B and mix thoroughly for 3-4 minutes using a stir stick.

Pot Life:

Once components A & B are mixed thoroughly together, let mixed material sit for 10 minutes prior to use. Otherwise, product will be difficult to roll. You have approximately 30 minutes to apply

Dry Time:

12-14 hours at 77°F. Ready for dry-erase marker use in 4 days

Application:

EZ WRITE OFF LLC
438 EGG HARBOR RD
BLUE ANCHOR, NJ 08037
856-768-3665



INVISIBLE ARMOR

PROTECTIVE COATING

TWO- COMPONENT SATIN FINISH

WATER-BASE FORMULA
 2B : 1A MIX RATIO

32 Fl. Oz. | 946 ml
 Coverage: 40 sq. ft.

SIDE B RESIN

Do Not Thin. Apply an even, moderate coat using a foam roller cover.

Limitations: Do not apply when ambient or surface temperatures are below 45°F or above 95°F.

Do not apply thicker than 400 square feet per gallon on a smooth surface

Caution: Humidity, fog, rain or overnight condensation may cause undesirable results

Keep out of reach of children. Harmful or fatal if swallowed. Read label, SDS and product information thoroughly before use.

There are no hazardous components above the relevant concentration limits according to OSHA HazCom 2012.

First Aid: General advice: Immediately remove contaminated clothing.

If inhaled: Remove to fresh air. If breathing is difficult, give oxygen. If symptoms persist, call a physician.

If on skin: Wash off immediately with soap and plenty of water while removing all contaminated clothes and shoes. If symptoms persist, call a physician.

If in eyes: Immediately flush with plenty of water. After initial flushing, remove any contact lenses and continue flushing for at least 15 minutes. Keep eye wide open while rinsing. If symptoms persist, call a physician


If swallowed: Clean mouth with water. Call a physician

Caution: Moisture, high humidity, fog, rain or overnight condensation may cause undesirable results

FOR PROFESSIONAL USE ONLY

VOC < 50 g/l

KEEP OUT OF REACH OF CHILDREN

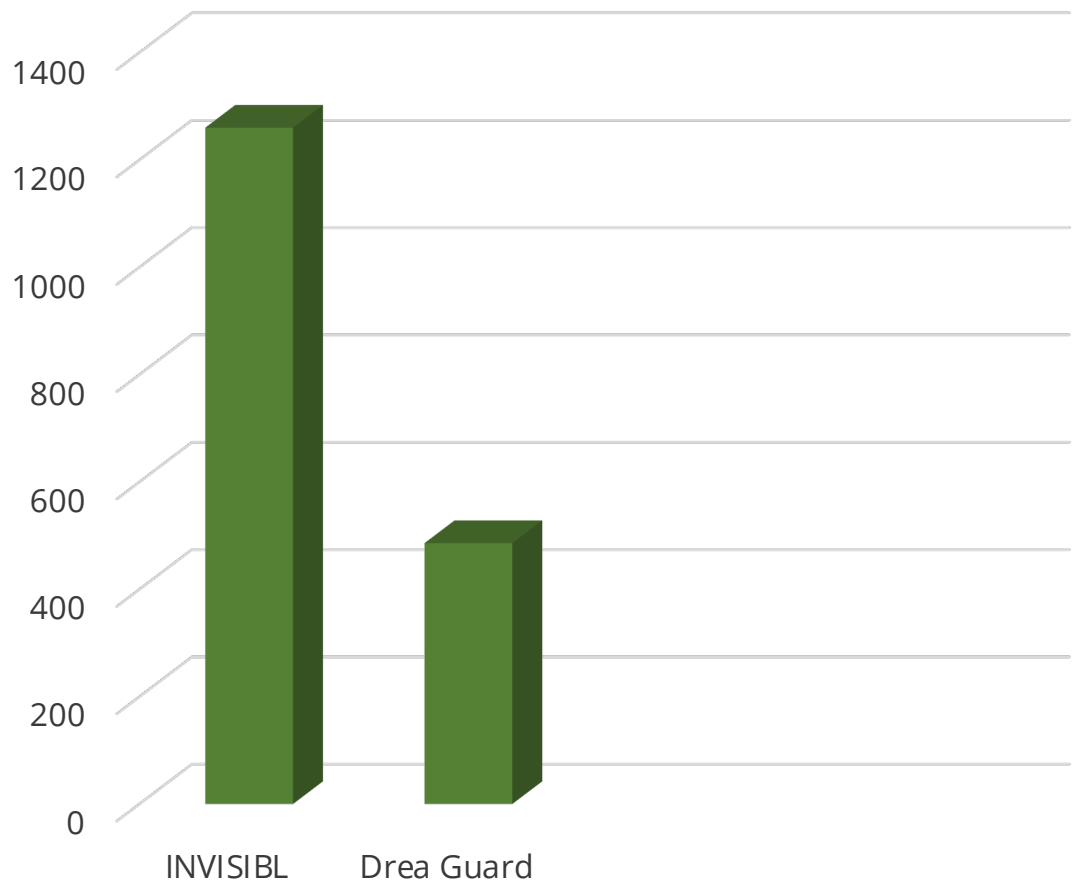

November 22, 2019

ASTM D2486

Scrub Test

DreamGuard.....failed at 486 scrubs
Invisible Armor Coating.....failed at 1,260 scrubs