

PAPAS

WASTE EQUIPMENT INTERNATIONAL

Australian leaders in quality waste management solutions since 1980.

'KOOKABURRA'-series

Rear-Loading Compaction Units

Available in capacities from 10m³ to 28m³



Standard Features:


- Radius design for superior strength
- 6mm Bisalloy 400 wear plate floor in hopper
- 5mm high-tensile steel floor & sides in body
- Fully welded externally for maximum strength & corrosion resistance
- Low loading height for ease of operation
- Automatic lock/unlock system for rear door
- Heavy duty proprietary rear door seal
- Premium hydraulic filtration system
- Abrasive-blasted, undercoated & top-coated in two-pack paint (single colour)
- PLC Control system
- Telescopic ejection system inc. adjustable load density control
- Extreme-duty ejector blade guides inc. anti-twist feature to accommodate eccentric payloads in body

Optional Features:

- Supply & fitment of heavy-duty PTO
- Camera systems (inc. multi-viewpoint)
- Bin-lift systems (120/140/240/660/1000 litre)
- LED vehicle lighting system
- Spare wheel carrier
- Hopper & rear flood-lighting
- Piston-pump hydraulic system
- Automatic greasing system
- Toolboxes (various sizes available)
- Strobe beacons inc. protective guard
- Bin deodoriser system
- Tuckaway bin-lift system (120-1000 litre/1000kg capacity)
- Water wash-down system
- Fire extinguishers (or automatic fire suppression system)
- Weighing systems inc. digital display & printer



Dim.	Description	10m ³	12m ³	13m ³	17m ³	20m ³
A	Body floor length	3425mm	3975mm	4250mm	4500mm	5000mm
B	Overall length (not inc. steps or bin lifter)	4940mm	5490mm	5765mm	6265mm	6840mm
C	Height above chassis—tailgate closed (subject to wheel clearance)	1970mm	1970mm	2150mm	2150mm	2380mm
D	Height above chassis—tailgate open (subject to wheel clearance)	3985mm	3985mm	3985mm	4165mm	4165mm
	Overall width	2440mm	2440mm	2440mm	2440mm	2440mm
	Hopper capacity	1.1m ³	1.1m ³	1.1m ³	1.1m ³	1.5m ³
	Width of hopper opening	2025mm	2025mm	2025mm	2025mm	2025mm
	Hopper loading height (from top of chassis—subject to wheel clearance)	-35mm	-35mm	-35mm	-35mm	-35mm
	Cab-chassis minimum GVM	10,400kg	13,600kg	15,000kg	15,000kg	22,500kg
	Approximate wheelbase (guide only)	4300mm	4300mm	4500mm	4800mm	5000mm

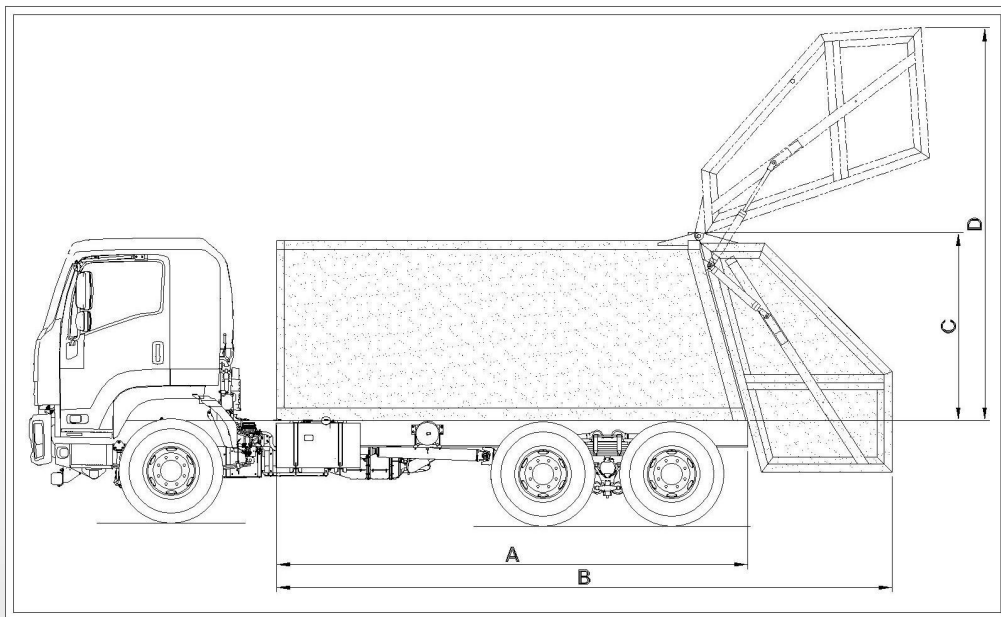

Papas Waste Equipment International Pty Ltd

Location: 6 Duncan Road, Dry Creek, South Australia 5094

Postal Address: PO Box 226, Dry Creek, South Australia 5094

Phone: +61 8 8162 9241 Fax: +61 8 8162 9291

Web: www.papas.com.au Email: info@papas.com.au

Papas Waste Equipment International Pty Ltd reserve the right to alter these specifications without prior notice.