




LSR13001041
LSR13001043

High Brightness Outdoor Battery Powered Android Digital LCD A Frame Display



BATTERY
POWER



2500 NITS HIGH
BRIGHTNESS



IP66
WATERPROOF



BUILT-IN
ANDROID



EASY TO
MOVE



LOCKING
BAR



Features



BATTERY POWER

The Outdoor Digital Poster is equipped with a large capacity rechargeable battery, which does not require complex power line layout, reduces the use of wires and sockets, and allows advertising to be placed in more locations. Integrated lithium battery offers 14-36 hours run time from a single charge.



IP66 WEATHERPROOF

These displays can effectively prevent wind, rain, and dust from invading, and at the same time, it can maintain stable performance under long-term wind and sun exposure, extending the service life of the product. It can effectively protect internal electronic components, prevent short circuits or malfunctions caused by external environment.



HIGH BRIGHTNESS SUNLIGHT READABLE

With a 2500nits high brightness panel, the content can still be displayed clearly in outdoor sunlight or bright environments, making it suitable for outdoor demonstrations and other activities. High brightness makes the image more vivid and clear, improving the readability of screen content.



INTEGRATED ANDROID MEDIA PLAYER

It is all in one Android system. Support playback of various video and audio formats, and users can install third-party applications, allowing you to easily update content via USB drive or via cloud-based CMS software.

Features




ANTI-GLARE TEMPERED GLASS

The front screen uses tempered glass that has been specially treated to have an anti-glare effect. This completely diffuses external light reflections without reducing the brightness of the screen, improving the readability of the screen content.



BATTERY LEVEL INDICATOR

The smart meter on the rear of the battery display tells you exactly how much charge the battery has left, including an estimation of running time remaining, so you can rest assured that the battery will never die unexpectedly.

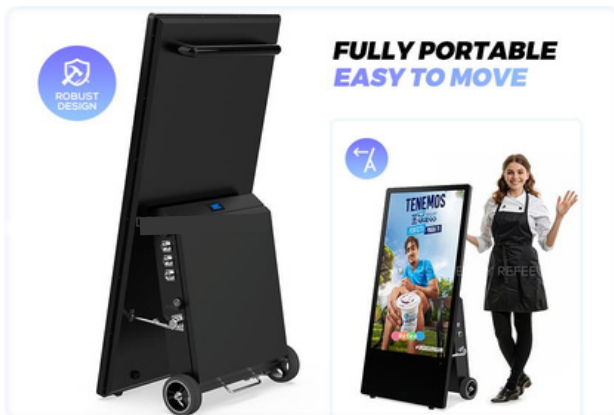

PORTABLE DESIGN

With a lightweight rear, easy grip handle along with rugged castors, means the digital posters can easily be moved by one person. The specialized castors are designed to minimize vibrations on uneven surfaces, protecting the internal components for a longer product lifespan.



SECURE LOCKING BAR

Once in place, the sturdy castors can be locked into place with the built-in locking bar. For the product additional security, an optional padlock can be used to lock the bar in place.


43"/49" FHD LCD
HIGH BRIGHTNESS

METAL
HOUSING

ANTI-GLARE
TEMPERED GLASS

AMBIENT
LIGHT SENSOR

ANTI-SKID

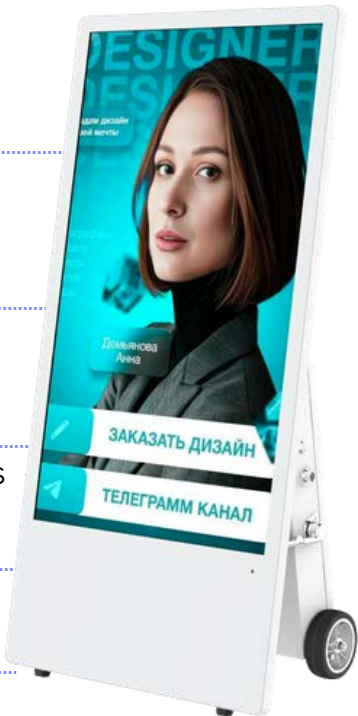

HANDLE

BATTERY LEVEL
INDICATOR

MAINTENANCE
DOOR

INDUSTRIAL
CASTORS

LOCKING
BAR



INTERFACES



USB x 2



RJ45






POWER




CHARGING
PORT


Applications&Cases

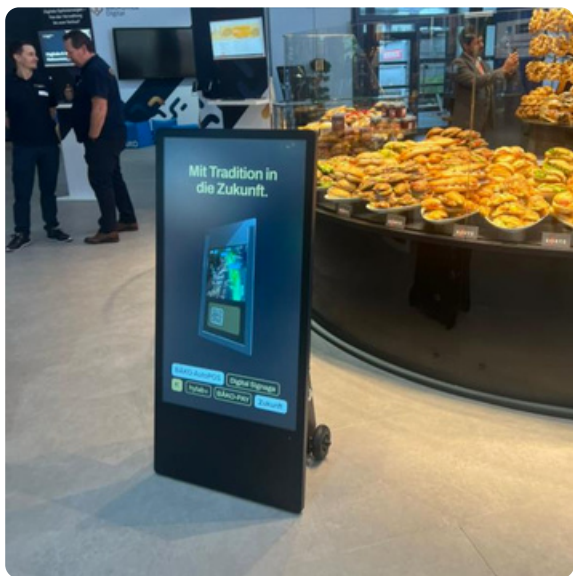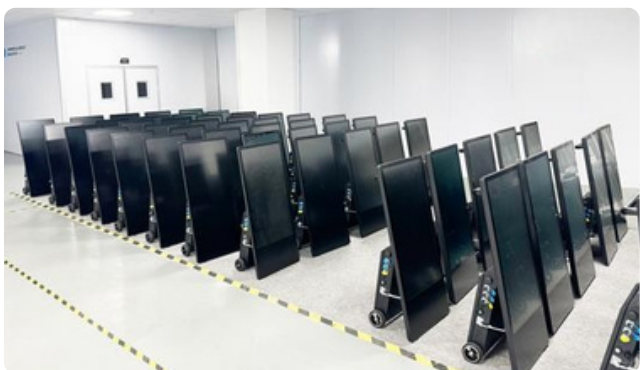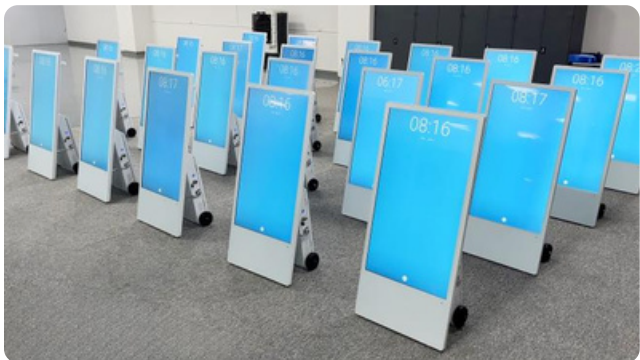

LSR13001041

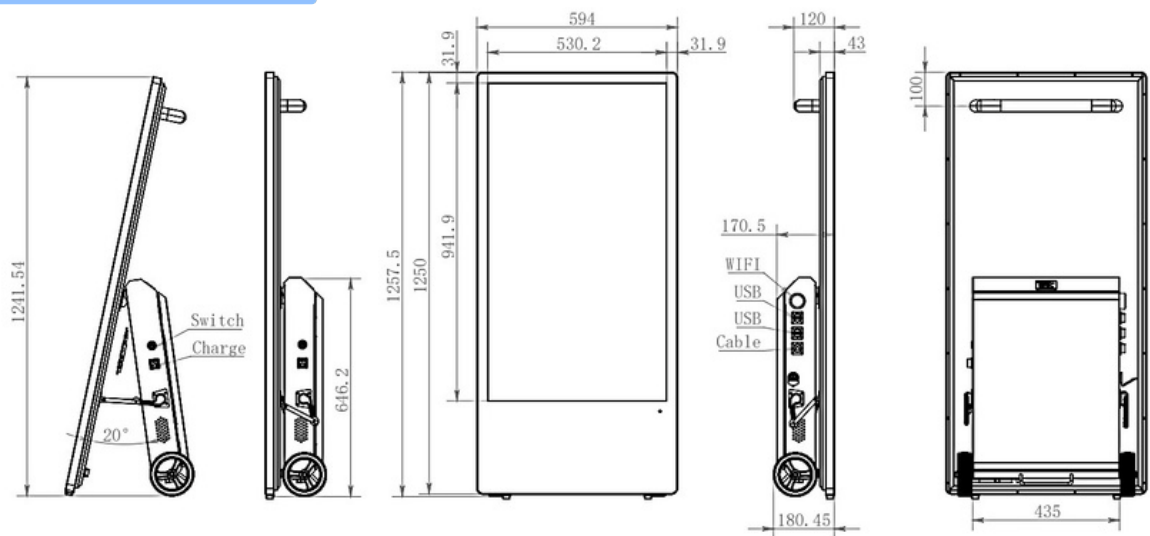

LSR13001043

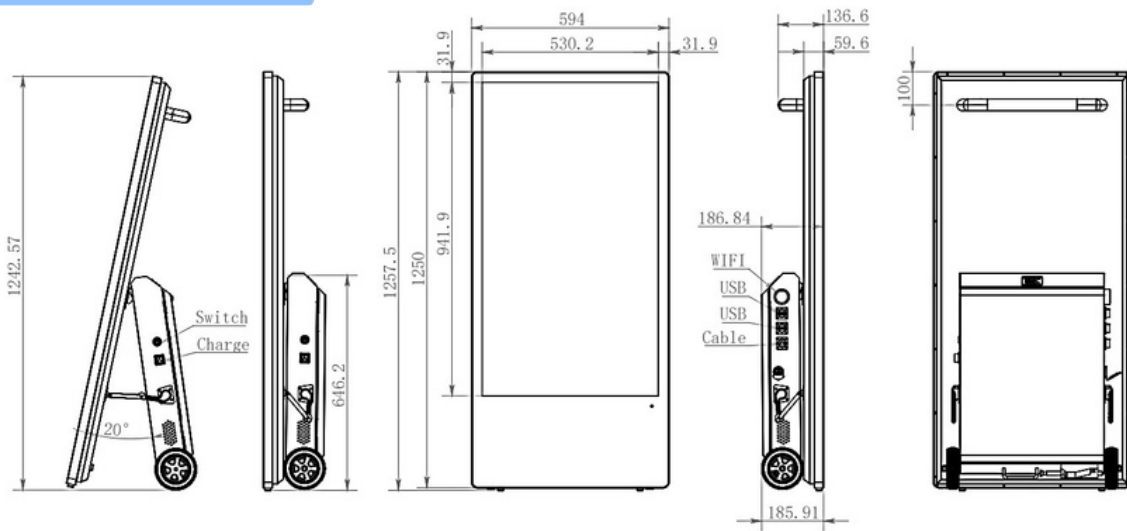

Specification



Specification:			
Model No.:	LSR13001041		LSR13001043
Panel			
LCD Panel Type	43inch		43inch
Resolution	1920*1080		1920*1080
Backlight	LED		LED
Brightness	1500nits		2500nits
Contrast Ratio	1200:1		1200:1
Color Depth	8 bits		8 bits
Response Time	8 ms (typ)		8 ms (typ)
Viewing Angle	178° / 178°		178° / 178°
Light Life Time	50,000 hrs (typ.)		50,000 hrs (typ.)
POWER			
Charger with power input 110V or 220V, 50 Hz / 60 Hz			
Power Supply			
Rated Voltage			
Rechargeable Battery	43.2Ah battery capability		60Ah battery capability
Charing time	4.5 hours		6.5 hours
Power Consumption	<98W		<135W
USER INTERFACE			
Language	English / Multi Language option -20°C ~ 60°C		
ENVIRONMENT			
-10°C ~ 60°C			
Operating Temperature	10% ~ 80% RH Non-condensing ARM Quad-core Cortex-A53 up to 2.2GHz		
Storage Temperature	4GB DDR3		
Humidity	Mali-G52 MC3		
INTERNAL PLAYER			
eMMC 32GB(about 2GB occupied by o/s)			
Processor	Decoder: 4K/8K,H.265; Encoder: 1080P 100fps H.265/H.264		
Main memory interface	USB 3.0 x2, RJ45 x 1, HDMI out*1		
Graphics	Android 14 OS		
Storage (FDM)	Wi-Fi6, RJ45 10/100M/1000M		
Multimedia			
IO ports			
Operating system			
Network			
ENVIRONMENT			
Storage Temp	(-20 --65 degree)		
Working Temp	(0 --50 degree)		
Storage/Working Humidity	(10 -- 90 %)		
CERTIFICATION			
CE, FCC&Rohs	CE&RoHS		
MECHANICAL SPECS			
Orientation	Portrait		
Cabinet Color	Black/White/Customized		
Product Dimension (LxHxD)	1257.5*594*180.45mm		1257.5*594*182.451mm
CTN Dimension (LxHxD)	138*28*71.5cm		138*28*71.5cm
Weight (N.W)	43KG		54.5KG
Weight (G.W/ Carton)	48KG		65KG

- FAST DELIVERY
- READY TO SHIP
- IN STOCK



ACCESSORIES



POWER CABLE



BATTERY CHARGER



MAINTENANCE KEY

Package

