



BRIGHT MESSAGING. NO OUTLET REQUIRED.

LiteScapes™ 43" Battery-Powered Digital LCD A-Frame

Portable, high-brightness digital
signage for indoor and outdoor
environments.

1,500 or 3,000 Nits

Android 14

IP65-Rated

Up to 42 Hours*

LSR13001974 | LSR13001975

*Battery runtime varies by model, content, brightness, and
operating conditions.



CHOOSE THE RIGHT VISIBILITY

ONE PLATFORM. TWO LEVELS OF VISIBILITY.

Choose the brightness and battery performance that fit the environment.

LSR13001974

1,500 NITS

BRIGHT + PROTECTED

Bright interiors, covered entrances, shaded patios, and protected outdoor areas.

- 43" Full HD LCD
- LED backlight
- 1,200:1 contrast ratio
- 12-35 hour battery runtime
- 50,000-hour rated backlight life
- 52.3 kg / 115.3 lb net weight

LSR13001975

3,000 NITS

DIRECT-SUN VISIBILITY

Outdoor environments, storefront entrances, patios, and areas exposed to direct sunlight.

- 43" Full HD LCD
- MiniLED backlight
- Advanced local dimming
- 1,000,000:1 dynamic contrast
- 18-42 hour battery runtime
- 60,000-80,000-hour rated life
- 54.5 kg / 120.2 lb net weight

SHARED PLATFORM

FHD 1920 × 1080

IP65

Rated protection

60Ah

Rechargeable
battery

6.5H

Approx. recharge

UV

Anti-glare glass

AUTO

Ambient sensor

A14

Android 14 player

MOVE

Caster design

FREEDOM TO PLACE THE MESSAGE

DIGITAL CONTENT, WHEREVER YOU NEED IT.

Built for bright, changing commercial environments.



ANTI-GLARE GLASS

A clear, low-reflection viewing surface.

AMBIENT SENSOR

Brightness responds as surrounding light changes.

01

BATTERY-POWERED FREEDOM

A built-in 60Ah rechargeable battery removes the need for a nearby outlet, supporting entrances, walkways, patios, events, and other changing locations.

02

HIGH-BRIGHTNESS VISIBILITY

Choose 1,500 nits for high-ambient-light and protected environments or 3,000 nits for demanding outdoor and direct-sunlight applications.

03

UV-PROTECTIVE ANTI-GLARE GLASS

Tempered anti-glare glass reduces distracting reflections. The UV-protective layer is designed to block approximately 90% of sunlight UV exposure.

04

IP65-RATED PROTECTION

The enclosure provides IP65-rated protection against dust and water for dependable operation in changing commercial environments.

05

AUTOMATIC BRIGHTNESS CONTROL

An integrated ambient light sensor automatically adjusts screen brightness as surrounding lighting conditions change.


DESIGNED FOR REAL-WORLD MOVEMENT

MOVE IT. POSITION IT. UPDATE IT.

Portable hardware up front. Flexible content control behind it.

PORTABLE BY DESIGN

A robust wheeled design can be repositioned as traffic patterns, promotions, and events change. The rear support and locking bar help keep the unit stable once placed.

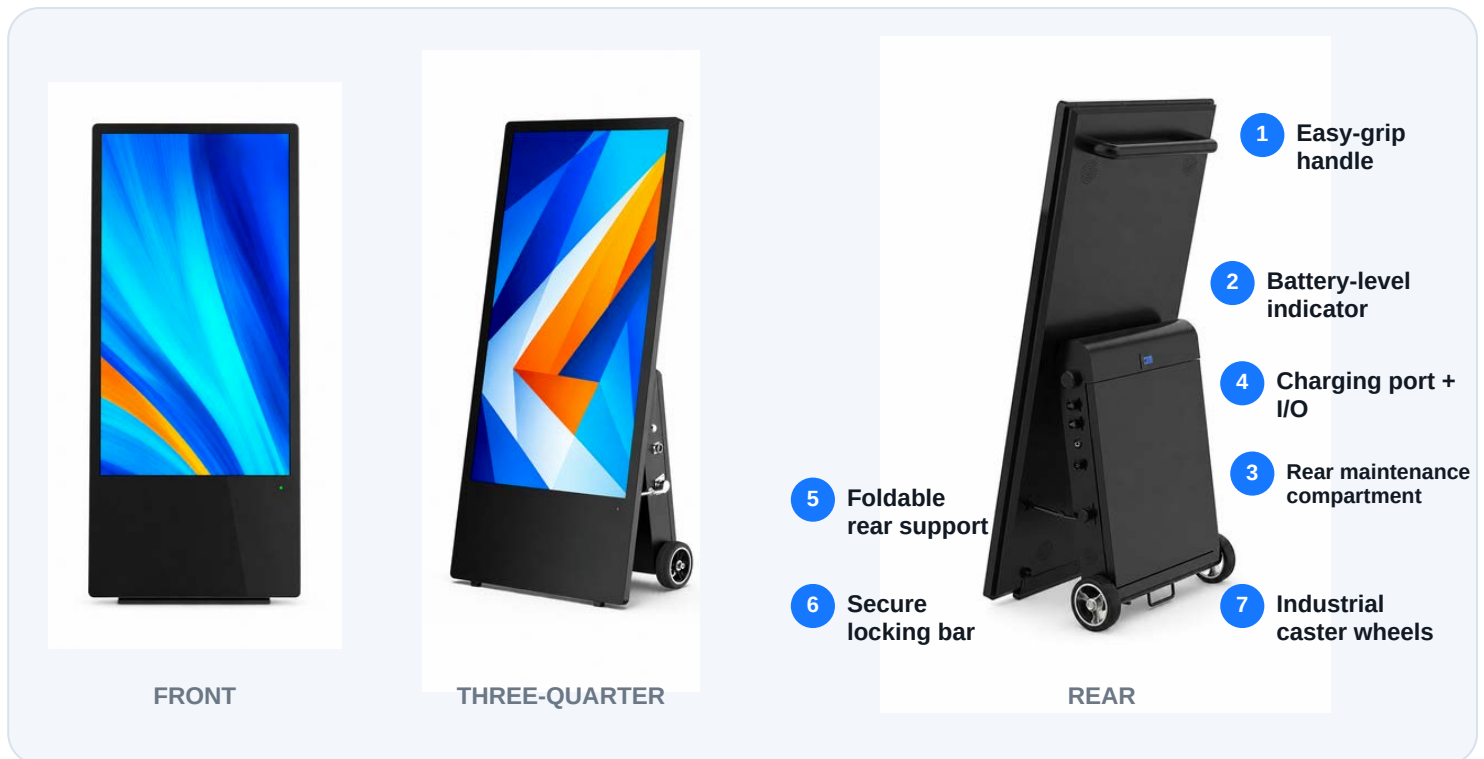

CONTENT YOUR WAY

- USB** Plug-and-play
- A14** Android 14 player
- Wi-Fi** Wi-Fi 6
- GbE** Gigabit Ethernet
- HDMI** HDMI input
- CMS** Optional cloud CMS

RK3576 • 4GB RAM • 32GB STORAGE • 2× USB 3.0 • 1× RJ45 • 1× HDMI INPUT

Cloud-based CMS capability is optional. CMS software is not included.

BUILT TO GO WHERE THE MESSAGE MATTERS.

Move the same bright digital canvas from daily promotions to temporary events.



01

QSR + RESTAURANTS

Patio promotions, pickup messaging, daypart menus, and limited-time offers.



02

RETAIL + SHOPPING CENTERS

Storefront promotions, seasonal campaigns, product launches, and directional messaging.



03

HOSPITALITY + EVENTS

Hotel entrances, conferences, event schedules, receptions, and temporary activations.



04

CAMPUSES + COMMERCIAL

Wayfinding, visitor information, announcements, tenant messaging, and safety communications.

TECHNICAL COMPARISON

43" BATTERY-POWERED
LCD A-FRAME

SPECIFICATION	LSR13001974	LSR13001975
Display size	43"	43"
Resolution	1920 × 1080	1920 × 1080
Orientation	Portrait	Portrait
Brightness	1,500 nits	3,000 nits
Backlight	LED	MiniLED
Contrast	1,200:1	1,000,000:1 dynamic
Color depth	8-bit	8-bit
Response time	8 ms	8 ms
Viewing angle	178° / 178°	178° / 178°
Rated backlight life	50,000 hours	60,000-80,000 hours
Battery	60Ah	60Ah
Estimated runtime	12-35 hours	18-42 hours
Recharge time	Approx. 6.5 hours	Approx. 6.5 hours
Power consumption	98W	98W
Operating system	Android 14	Android 14
Memory / storage	4GB / 32GB	4GB / 32GB
Connectivity	Wi-Fi 6, RJ45, HDMI, USB	Wi-Fi 6, RJ45, HDMI, USB
Protection rating	IP65	IP65
Cabinet color	Black	Black
Product dimensions	1257.5 × 594 × 182.5 mm	1257.5 × 594 × 182.5 mm
Net weight	52.3 kg / 115.3 lb	54.5 kg / 120.2 lb

DIMENSIONS



TAKE DIGITAL MESSAGING
BEYOND THE WALL.

Talk with Digipoint Media about the right
A-frame configuration for your
environment.

Product specifications are subject to change. Battery runtime depends on brightness, content, temperature, and operating conditions.