



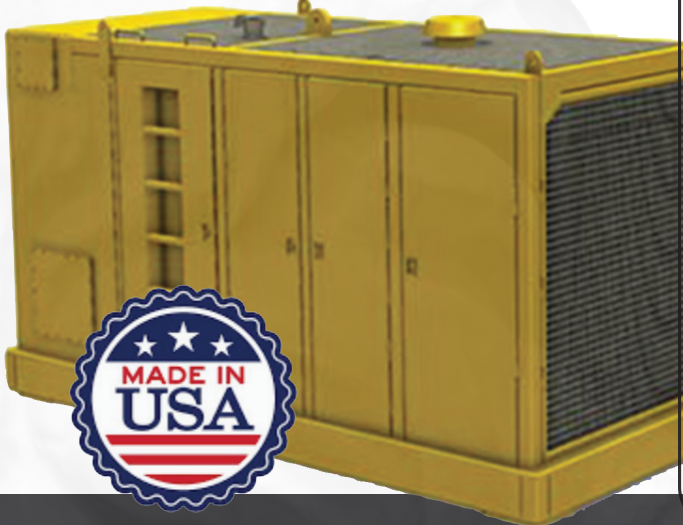

ANTAEUS 320 APEX

VIBRATORY PILE DRIVER/EXTRACTOR TIER 4 & STAGE 5 500HP POWER UNIT

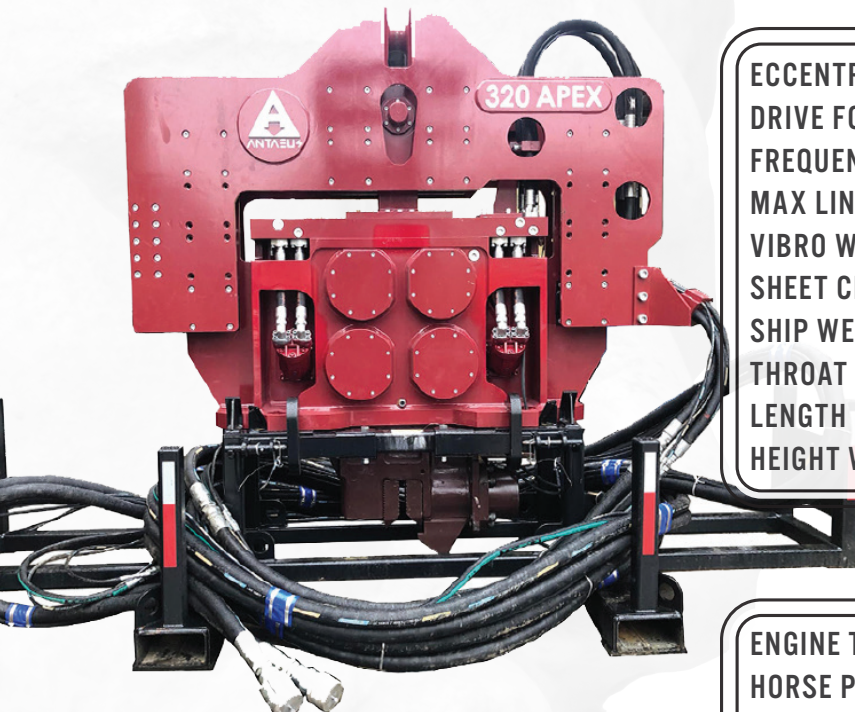

ECCENTRIC MOMENT	3200 INCH-LBS	37 KG-M
DRIVE FORCE	120 US TONS	109 MT
FREQUENCY MAXIMUM (VPM)	400-1650 VARIABLE	
MAX LINE PULL	87 US TONS	867 KN
VIBRO WEIGHT *WITH SHEET CLAMP	14,500 LBS	6 577 KG
SHEET CLAMP WEIGHT	1,470 LBS	667 KG
SHIP WEIGHT: *WHILE IN STAND WITH HOSE AND SHEET CLAMP	18,500 LBS	8 391 KG
THROAT WIDTH	16.75 INCHES	42,5 CM
LENGTH	94 INCHES	2,387 M
HEIGHT WITHOUT CLAMP	80 INCHES	2,032 M

ENGINE TYPE	TIER 4, STAGE 5	C13 B
HORSE POWER	456 HP	340 KW
DRIVE PRESSURE	4,500 PSI	310 BAR
DRIVE FLOW	170 GPM	643,5 LPM
CLAMP PRESSURE	4,800 PSI	331 BAR
CLAMP FLOW	10 GPM	350 BAR
ENGINE SPEED	1800 RPM	
WET WEIGHT (ALL FLUIDS)	19,700 LBS	8 935 KG
LENGTH	144 INCHES	3,65 M
WIDTH	77 INCHES	1,95 M
HEIGHT	82 INCHES	2,08 M
MAIN HYDRAULIC RESERVOIR	680 GALLONS	2 574 L
SPARE HYDRAULIC RESERVOIR	55 GALLONS	208 L
FUEL CAPACITY	140 GALLONS	530 L

ANTAEUS FOUNDATION EQUIPMENT, LLC.
HEADQUARTERS
Antaeus Foundation Equipment LLC
250 South Webster Ave
Seattle, Washington 98108



Seattle, WA
+12063760405
+12064957030
<http://www.antaeususa.com>

2021