




# ANTAEUS 325-2

## VIBRATORY PILE DRIVER & EXTRACTOR

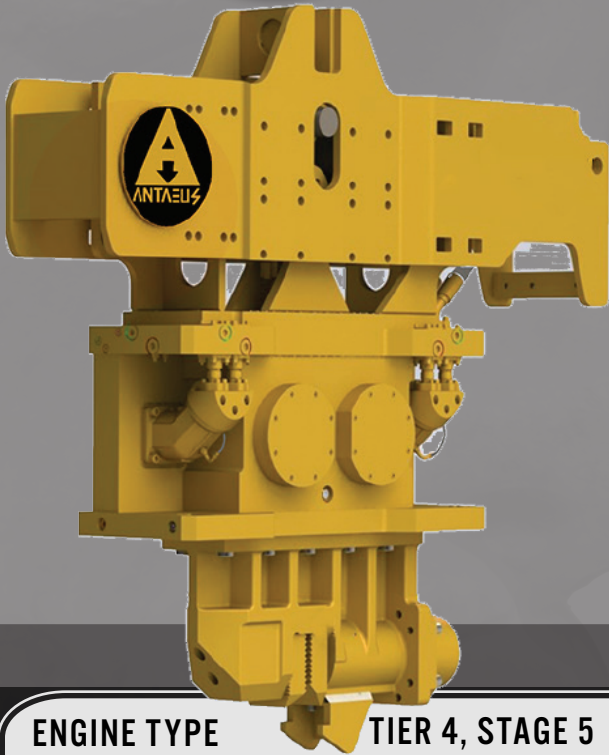

ECCENTRIC MOMENT	2,600 IN-LBS	30 KG-M
DRIVE FORCE	120 TONS	1 067 KN
FREQUENCY	0-1800 VPM	0-1800 VPM
MAX LINE PULL	108 TONS	961 KN
WEIGHT *W/O CLAMPS	5,500 LBS	2 494 KG
THROAT WIDTH	15.25 INCHES	38 CM
LENGTH	88.75 INCHES	225 CM
HEIGHT *W/O CLAMPS	73 INCHES	186 CM

ENGINE TYPE	TIER 4, STAGE 5 C18	
HORSE POWER	645 HP	481 KW
ENGINE SPEED	1,800 RPM + UPDRIVE™	
DRIVE PRESSURE	4,800 PSI	331 BAR
DRIVE FLOW	230 GPM	871 LPM
CLAMP PRESSURE	4,800 PSI	331 BAR
CLAMP FLOW	10 GPM	3 LPM
WEIGHT (ALL FLUIDS)	12,600 LBS	5 715 KG
LENGTH	157 INCHES	399 CM
HEIGHT	70 INCHES	70 CM
WIDTH	77 INCHES	77 CM
HYDRAULIC RESERVOIR SIZE	800 GAL	3 028 LITERS
SPARE HYD RESERVOIR SIZE	55 GAL	208 LITERS
FUEL CAPACITY	150 GAL	567 LITERS

### 500HP POWER UNIT

- OPERATES VIBROS, DRILLS & IMPACTS
- SPARE HYDRAULIC TANK
- FULL FORWARD AND REVERSE
- MEETS EUROPEAN REGULATIONS

