




## PROPER BOLT LENGTH FOR ANTAEUS AND APE VIBROS

**The clamp mounting bolt should stick out the top of the clamp a full 1-3/4 inches. The total thickness of the clamp casting should be 1-1/4 inches**

**3.5 inch bolt & lock washer**

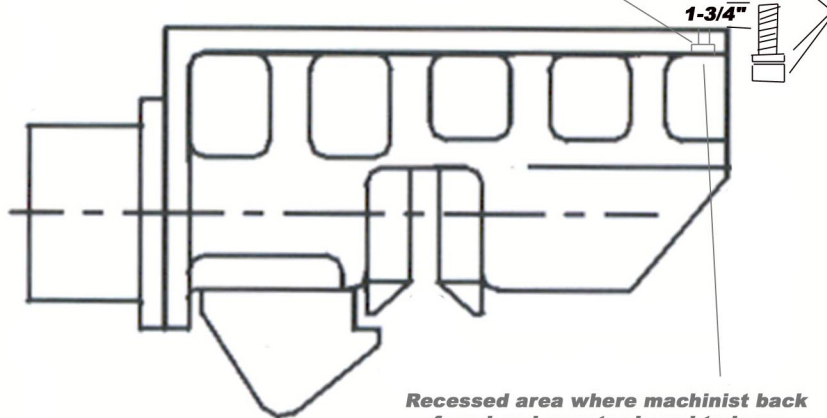

**Recessed area where machinist back faced and counter bored to leave 1-1/4 inches remaining**