


EXPERTS IN HIGH PERFORMANCE PROTECTIVE WRAPPING



PROTECTIVE WRAPPING

SPECIFICATION					
PRODUCT CODE	NOMINAL OD (MM)	NOMINAL ID (MM)	WALL THICKNESS (MM)	PITCH (MM)	MTRS/BOX
SHG-10	10	8	1.0	10	50
SHG-12	12	9	1.5	10	50
SHG-16	16	12.6	1.7	12	20/50
SHG-20	20	16	2.0	16	20/50
SHG-25	25	20.6	2.2	20	20/50
SHG-32	32	27	2.5	22	20/50
SHG-40	40	34.6	2.7	27	20/50
SHG-50	50	44	3.0	30	20
SHG-63	63	55.4	3.8	37	20
SHG-75	75	67	4.0	42	20
SHG-90	90	80	5.0	45	20
SHG110	110	99	5.5	50	12
SHG-125	125	113	6.0	55	12
SHG-140	140	128	6.0	55	9
NOTE : ALL OUTER AND INNER DIMENSIONS ARE NOMINAL WALL THICKNESS TOLERANCE +/- 0.2 MM PITCH TOLERANCE +/- 1.0 MM OUTSIDE DIMENSIONS OF THE SPIRAL GUARD WILL ALTER DURING PACKAGING AND SHIPPING THEY WILL MEET SPECIFICATION WHEN FITTED TO HOSE. Temperature Ranges (-40 degree F to 280 degree F)					

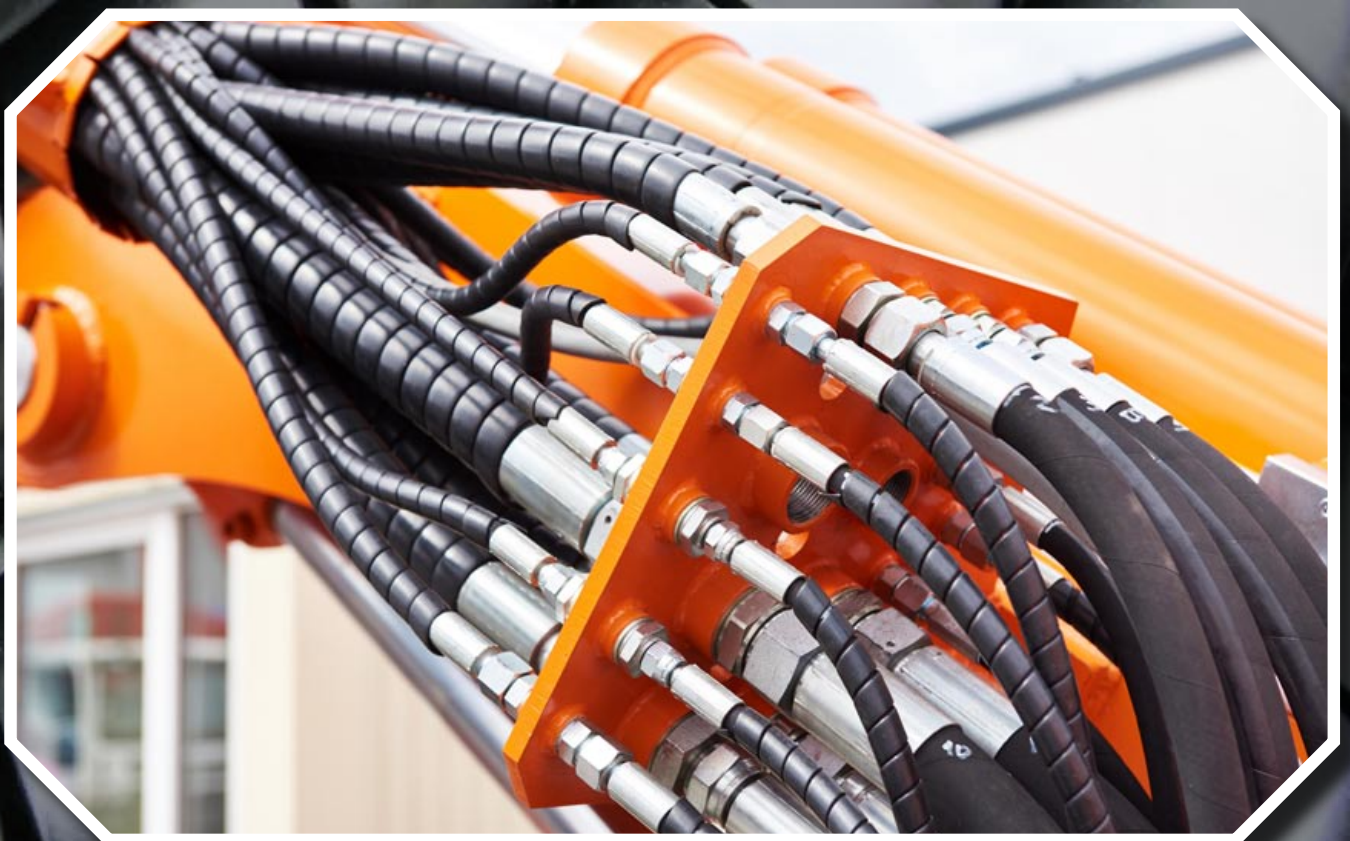

PROTECTIVE WRAPPING





NYLON HOSE SLEEVE

SPECIFICATION				
PRODUCT CODE	WIDTH FLAT (MM)	I D (MM)	THICKNESS (MM)	ROLL LENGTH (MTRS)
NHS-017-50	29	17	0.8	50
NHS-020-50	34	20	0.8	50
NHS-023-50	39	23	0.8	50
NHS-025-50	42	25	0.8	50
NHS-027-50	45	27	0.8	50
NHS-031-50	51	31	0.8	50
NHS-033-50	54	33	0.8	50
NHS-036-50	59	36	0.8	50
NHS-040-50	65	40	0.8	50
NHS-044-50	72	44	0.8	50
NHS-047-50	76	47	0.8	50
NHS-053-50	86	53	0.8	50
NHS-055-50	89	55	0.8	50
NHS-060-50	97	60	0.8	50
NHS-066-50	106	66	0.8	50
NHS-073-50	117	73	0.8	50
NHS-078-50	125	78	0.8	50
NHS-085-50	136	85	0.8	50
NHS-093-50	149	93	0.8	50
NHS-112-50	178	112	0.8	50

NYLON HOSE SLEEVE



CERTIFICATION

ISO Certification: 9001/2015.

MSHA Approval No. 140862 (MSHA IC-282) February 22nd 2012.

FRAS Approval No. NE13/0061 December 18th 2013. (FRAS Approval AS1180. 10B-1982 Flame Resistant, AS1180. 13A-1982 Electrical Resistance).



599 5th Avenue NE | Melrose, MN 56352
Ph 320-248-0805 | trevor@mwindsolutions.com