




Vankos & Company (Hyderabad)

DOUBLE ACTING PLAIN RAM OIL RETURN STAGE LIFT JACK

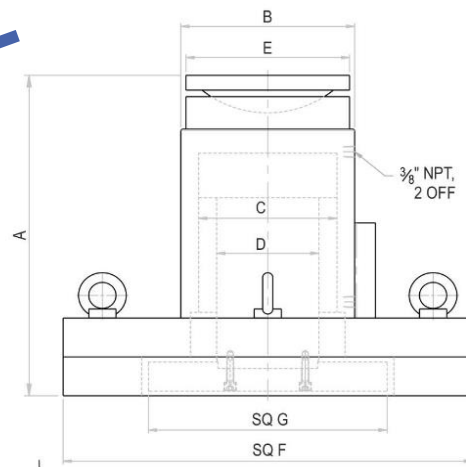

Application: To lift, lower, reposition heavy structures in stages at different heights.

Specification:

Rated capacity (ton)	Stroke (mm)	Model	Effective area cm ²	Oil cap. (cc)	A Closed Height (mm)	B Cylinder OD (mm)	C Bore dia (mm)	D Ram dia (mm)	E Saddle dia (mm)	F Cylinder base (mm)	G Ram base (mm)	Wt . (Approx) (kg)
100	150	VDSL 100-150	153.9	2310	450	175	140	110	170	Sq 525	Sq 275	300
200	150	VDSL 200-150	314.2	4715	495	255	200	150	240	Sq 600	Sq 350	480
300	150	VDSL 300-150	452.4	6786	560	310	240	180	305	Sq 680	Sq 420	700
400	150	VDSL 400-150	572.6	8589	640	350	270	220	336	Sq 750	Sq 450	1120
500	150	VDSL 500-150	706.9	10605	670	400	300	240	360	Sq 800	Sq 550	1230
600	150	VDSL 600-150	855.3	12830	705	430	330	270	405	Sq 900	Sq 600	1800

Reg Office & Works: Plot No - 457 & 458, SVCIE, IDA, Phase I, Jeedimetla, Hyderabad-500055.
 Customer Care Number: +91 9490133585 , Email: sales@vankoshyd.com Web: www.vankoshyd.com

