


HYDRAULIC HAND PUMP



Features :

- Heavy duty Constructions.
- Hardened & Ground Piston.
- Light weight & easy to carry with provision of lifting handle.
- Integral relief & release valves.
- Renewable Delivery, Relief & Release value parts.
- Adjustable Relief valve provided inside the pump for pressure setting.
- Collapsible handle for reduce operator fatigue.
- 1/4" BSP outlet provided for compatibility to all reputed brand Hydraulic tools.



0.5 LTRS
HAND PUMP



HAND PUMP MOUNTED
ON 'U' FRAME



CARRYING HANDLE

SI	Pump Model	HP-1/P
1	No. of Plunger	1
2	Maximum Pressure Pump can develop. Kg/cm2	700
3	Discharge/stroke.cc	2.8
4	Used For Applications	Single Acting
5	Oil Tank Capacity	0.5, 1.2, 3 LTRS
6	Weight (kg) Without Oil	8.7
7	Other Pump Features	Collapsible Hand Lever

SI	Pump Model	HP-2A/P	HP-2A/DAP	HP-3012
1	No. of Plunger	2-IN-1	2-IN-1	2-IN-1
2	Maximum Pressure Pump can develop. Kg/cm2	700	700	700
3	Discharge/Stroke.cc	49 Upto 30 Bar 2.8 Above 30 Bar	49 Upto 30 Bar 2.8 Above 30 Bar	30 Upto 30 Bar 2.8 Above 30 Bar
4	Used For Applications	Single Acting	Double Acting	Single Acting
5	Oil Tank Capacity	3, 5, 7, 13 & 25 LTRS	3, 5, 7, 13 & 25 LTRS	1.2, 3 LTRS
6	Weight (Kg) without oil	21.6 (13 LTRS)	22.6 (13 LTRS)	8




HAND PUMP WITH
3 LTRS TANK



HAND PUMP WITH
7 LTRS TANK



DOUBLE ACTING
HAND PUMP

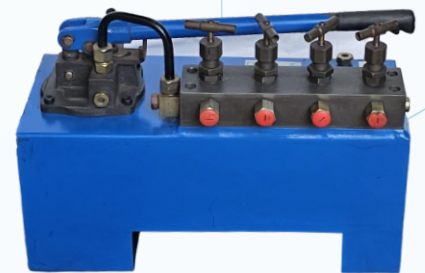


GANG JACKING HAND PUMP WITH
INDEPENDENT NEEDLE VALVES

POWERRAM
HYDRAULIC TOOLS

IMPORTED HAND PUMPS (MADE IN TAIWAN)

SPECIFICATIONS

Model No.	Pressure Rating (bar)		Usable Oil Capacity (c.c.)	Oil Volume Per Stroke (C.C.)		Weight (kgs)
	1st stage	2nd stage		1st stage	2nd stage	
AHP705	20	1500	1620	12.9	1.00	6.7
UHP2800	20	2800	700	12.9	0.65	6.7
HC2500	20	700	2200	13.0	2.8	12
HA700	700		640	3.2		7.6

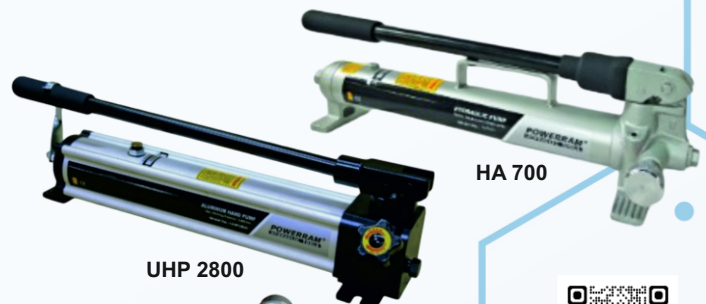

UHP 2800

HA 700

