


VDP SERIES DOUBLE ACTING PLAIN RAM GENERAL PURPOSE JACK

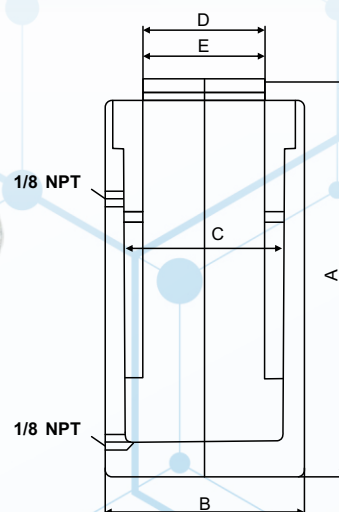

Features/Application

- General application jacks suited for push and pull purpose.
- Pressure relief valve in return line prevents accidental damage in return line.
- All exposed surfaces treated for corrosion resistance.
- Provided with In - Built Hardened saddle to avoid ram mushrooming
- Refer to anatomy for all VANKOS - HYD jacks.

CAPACITY 10 - 200 TON | STROKE 30 - 60 MM | MAX. WORKING PRESSURE 700 BAR

Rated Capacity (Ton)	Stroke (mm)	Model	Effective Area (cm ²)	Oil cap (cc)	'A' Closed height (mm)	'B' Cylinder OD (mm)	'C' Bore dia (mm)	'D' Ram dia (mm)	'W' A/F (mm)	Wt. (Approx.) (kg)
10	150	VDP-10/150	15.9	239	275	75	45	30	28	8
15	150	VDP-15/150	23.8	356	280	85	55	40	38	11
20	150	VDP-20/150	31.2	468	285	95	63	50	48	14
25	150	VDP-25/150	38.5	577	295	95	70	55	53	14.3
30	150	VDP-30/150	44.2	663	305	100	75	55	53	15.6
50	150	VDP-50/150	78.5	1178	305	130	100	70	67	26.3
75	150	VDP-75/150	113.1	1696	305	155	120	90	87	38.5
100	150	VDP-100/150	153.9	2309	310	180	140	110	106	53.5
150	150	VDP-150/150	227.0	3405	320	220	170	140	137	84
200	150	VDP-200/150	314.2	4712	345	255	200	150	146	116
250	150	VDP-250/150	380.1	5702	350	280	220	180	177	148
300	150	VDP-300/150	452.4	6786	365	310	240	180	177	181
400	150	VDP-400/150	572.6	8588	385	350	270	220	216	255

- Higher capacity and customized solutions on request.
- Specifications are subject to change due to continual improvement
- Capacity and Stroke specified are maximum safe limits.
- Use at 80% of rating as safe practice.

SELECT SUITABLE PUMPING UNITS AND ACCESSORIES

