




P-Series

P337 / 437

Open Stand and Agitator, Strainer and Agitator

| Technical Specifications | |
|--------------------------|----------------------------|
| Pump Type | Electric Submersible Pumps |
| Motor Type | Induction Motor |
| Poles | 4 Pole |
| Insulation | Class F |
| Protector | Circle Thermal Protector |
| Starter | D.O.L |
| Cable | 66ft G-GC 8/3 |
| Impeller Type | Opened |
| Shaft Seal | Double Mechanical Seal |
| Bearings | C3 Shielded ball bearings |
| Max Liquid Temperature | 104°F |
| Max Submersion Depth | 66ft |
| pH Range | pH 5 - pH 8 |

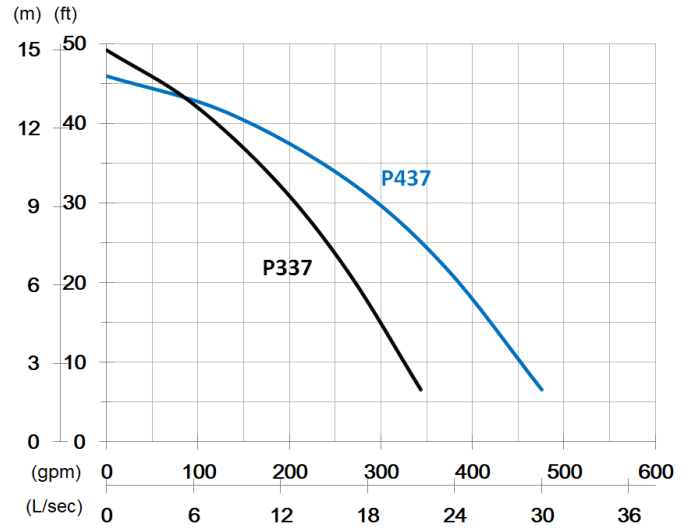

(P)



(S)

| Model | Discharge | Motor | Max Head & Max Flow | | Solid Passage | Weight | Dimension (inch) | | Amperage |
|----------|-----------|-------|---------------------|-------|---------------|--------|------------------|----------|----------|
| | (inch) | | (ft) | (gpm) | | | (inch) | Diameter | |
| P337 (P) | 3 | 5 | 49 | 343 | 1 | 243 | 15.2 | 30 | 7.7A |
| P337 (S) | 3 | 5 | 46 | 476 | 1 | 254 | 15 | 31.2 | 7.7A |
| P437 (P) | 4 | 5 | 49 | 343 | 1 | 243 | 15.2 | 30.8 | 7.7A |
| P437 (S) | 4 | 5 | 46 | 476 | 1 | 254 | 15 | 32 | 7.7A |




P-Series

P355 / 455 / 475

Open Stand and Agitator, Strainer and Agitator


| Technical Specifications | |
|--------------------------|----------------------------|
| Pump Type | Electric Submersible Pumps |
| Motor Type | Induction Motor |
| Poles | 4 Pole |
| Insulation | Class F |
| Protector | Circle Thermal Protector |
| Starter | D.O.L |
| Cable | 66ft G-GC 8/3 |
| Impeller Type | Opened |
| Shaft Seal | Double Mechanical Seal |
| Bearings | C3 Shielded ball bearings |
| Max Liquid Temperature | 104°F |
| Max Submersion Depth | 66ft |
| pH Range | pH 5 - pH 8 |

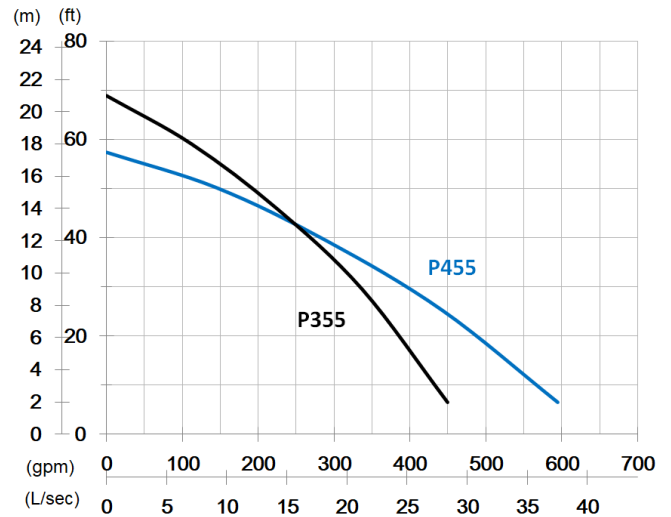

(P)



(S)

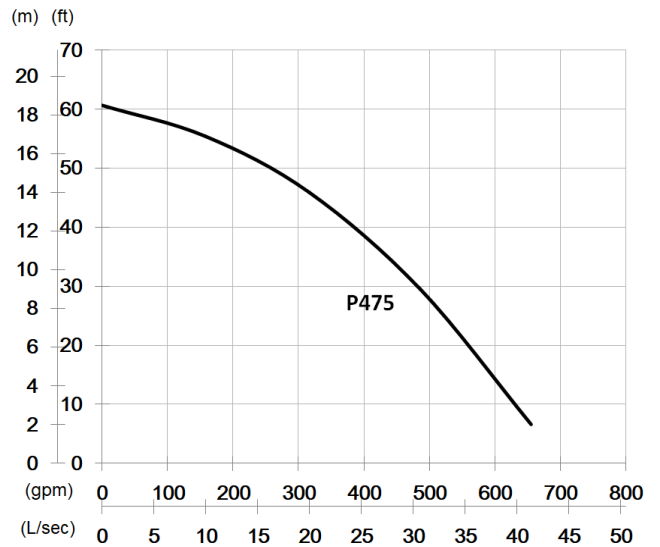

| Model | Discharge | Motor | Max Head & Max Flow | | Solid Passage | Weight | Dimension (inch) | | Amperage |
|----------|-----------|-------|---------------------|------|---------------|--------|------------------|--------|----------|
| | (inch) | | (HP) | (ft) | | | (gpm) | (inch) | |
| P355 (P) | 3 | 7.5 | 69 | 449 | 1 | 271 | 16.5 | 31.7 | 11.5A |
| P355 (S) | 3 | 7.5 | 69 | 449 | 1 | 289 | 16.2 | 31.7 | 11.5A |
| P455 (P) | 4 | 7.5 | 57 | 594 | 1 | 273 | 16.5 | 32.5 | 11.5A |
| P455 (S) | 4 | 7.5 | 57 | 594 | 1 | 291 | 16.2 | 32.5 | 11.5A |
| P475 (P) | 4 | 10 | 61 | 655 | 1 | 273 | 16.5 | 32.5 | 15.0A |
| P475 (S) | 4 | 10 | 61 | 655 | 1 | 291 | 16.2 | 32.5 | 15.0A |




P-Series

P4110 / 6110

Open Stand and Agitator, Strainer and Agitator

| Technical Specifications | |
|--------------------------|----------------------------|
| Pump Type | Electric Submersible Pumps |
| Motor Type | Induction Motor |
| Poles | 4 Pole |
| Insulation | Class F |
| Protector | Circle Thermal Protector |
| Starter | D.O.L |
| Cable | 66ft G-GC 8/3 |
| Impeller Type | Opened |
| Shaft Seal | Double Mechanical Seal |
| Bearings | C3 Shielded ball bearings |
| Max Liquid Temperature | 104°F |
| Max Submersion Depth | 66ft |
| pH Range | pH 5 - pH 8 |

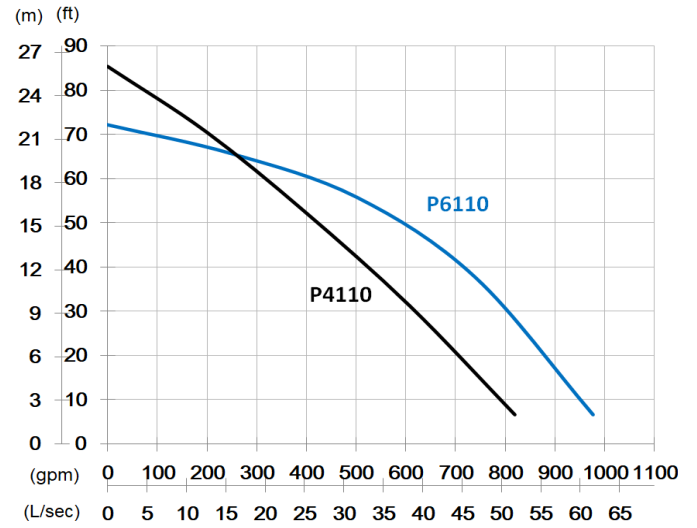

(P)



(S)

| Model | Discharge | Motor | Max Head & Max Flow | | Solid Passage | Weight | Dimension (inch) | | Amperage |
|----------|-----------|-------|---------------------|-------|---------------|--------|------------------|----------|----------|
| | (inch) | | (ft) | (gpm) | | | (inch) | Diameter | |
| P4110(P) | 4 | 15 | 85 | 819 | 1 | 421 | 18.9 | 35.5 | 22.6A |
| P4110(S) | 4 | 15 | 85 | 819 | 1 | 439 | 18.9 | 35.8 | 22.6A |
| P6110(P) | 6 | 15 | 72 | 977 | 1.4 | 423 | 18.9 | 35.9 | 22.6A |
| P6110(S) | 6 | 15 | 72 | 977 | 1.4 | 441 | 18.9 | 36.3 | 22.6A |




P-Series

P6150 / 6150L

Open Stand and Agitator, Strainer and Agitator

| Technical Specifications | |
|--------------------------|----------------------------|
| Pump Type | Electric Submersible Pumps |
| Motor Type | Induction Motor |
| Poles | 4 Pole |
| Insulation | Class F |
| Protector | Circle Thermal Protector |
| Starter | D.O.L |
| Cable | 66ft G-GC 8/3 |
| Impeller Type | Opened |
| Shaft Seal | Double Mechanical Seal |
| Bearings | C3 Shielded ball bearings |
| Max Liquid Temperature | 104°F |
| Max Submersion Depth | 66ft |
| pH Range | pH 5 - pH 8 |

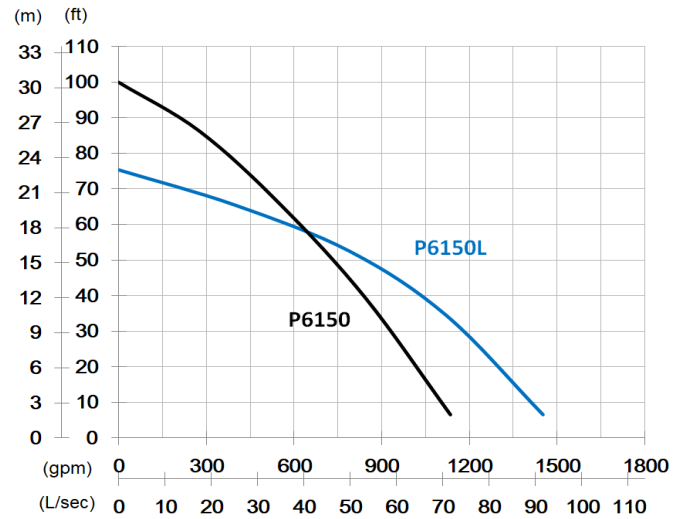

Ⓟ



Ⓢ

| Model | Discharge | Motor | Max Head & Max Flow | | Solid Passage | Weight | Dimension (inch) | | Amperage |
|-----------|-----------|-------|---------------------|-------|---------------|--------|------------------|----------|----------|
| | (inch) | | (ft) | (gpm) | | | (inch) | Diameter | |
| P6150(P) | 6 | 20 | 100 | 1136 | 1.4 | 443 | 18.9 | 35.9 | 30.1A |
| P6150(S) | 6 | 20 | 100 | 1136 | 1.4 | 459 | 18.9 | 36.3 | 30.1A |
| P6150L(P) | 6 | 20 | 75 | 1453 | 1.4 | 443 | 18.9 | 35.9 | 30.1A |
| P6150L(S) | 6 | 20 | 75 | 1453 | 1.4 | 459 | 18.9 | 36.3 | 30.1A |




P-Series

P6220 / 8220

Open Stand and Agitator, Strainer and Agitator

| Technical Specifications | |
|--------------------------|----------------------------|
| Pump Type | Electric Submersible Pumps |
| Motor Type | Induction Motor |
| Poles | 4 Pole |
| Insulation | Class F |
| Protector | Circle Thermal Protector |
| Starter | D.O.L |
| Cable | 66ft G-GC 8/3 |
| Impeller Type | Opened |
| Shaft Seal | Double Mechanical Seal |
| Bearings | C3 Shielded ball bearings |
| Max Liquid Temperature | 104°F |
| Max Submersion Depth | 66ft |
| pH Range | pH 5 - pH 8 |

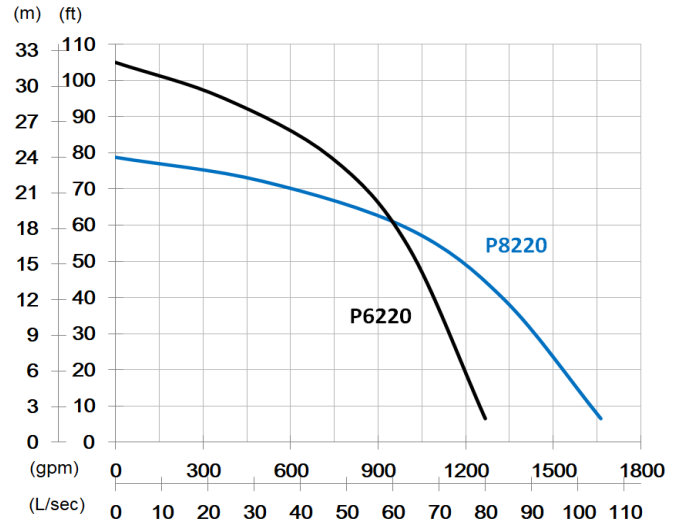

| Model | Discharge | Motor | Max Head & Max Flow | | Solid Passage | Weight | Dimension (inch) | | Amperage |
|----------|-----------|-------|---------------------|-------|---------------|--------|------------------|----------|---------------|
| | (inch) | | (ft) | (gpm) | | | (inch) | Diameter | |
| P6220(P) | 6 | 30 | 105 | 1268 | 1.2 | 761 | 23.3 | 47.4 | 45.2A / 36.2A |
| P6220(S) | 6 | 30 | 105 | 1268 | 1.2 | 787 | 23.3 | 47.6 | 45.2A / 36.2A |
| P8220(P) | 8 | 30 | 79 | 1664 | 1.4 | 783 | 23.3 | 45.9 | 45.2A / 36.2A |
| P8220(S) | 8 | 30 | 79 | 1664 | 1.4 | 809 | 23.3 | 46.1 | 45.2A / 36.2A |




P-Series

P6370 / 8370

Slurry and Sand Pump

| Technical Specifications | |
|--------------------------|--|
| Pump Type | Slurry and Sand Pump |
| Motor Type | Induction Motor |
| Poles | 6 Pole |
| Insulation | Class H |
| Protector | D.O.L: Miniature Thermal Sensor Start-Delta: Miniature Thermal Sensor |
| Starter | D.O.L / Start-Delta |
| Cable | 66ft H07RNF / H07BQF |
| Impeller Type | Closed |
| Shaft Seal | Slurry Lip Seals |
| Bearings | C3 Shielded ball bearings |
| Max Liquid Temperature | 104°F |
| Max Submersion Depth | 66ft |
| pH Range | pH 5 - pH 8 |

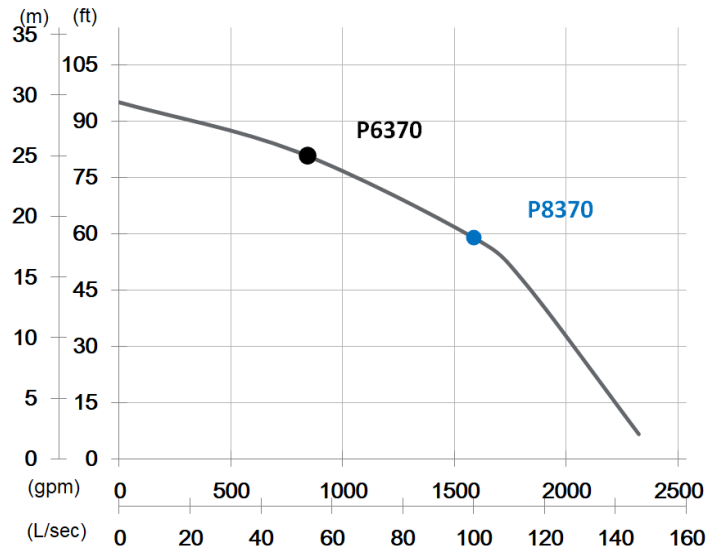

| Model | Discharge | Motor | Max Head & Max Flow | | Solid Passage | Weight | Dimension (inch) | | Amperage |
|-------|-----------|-------|---------------------|-------|---------------|--------|------------------|--------|----------|
| | (inch) | (HP) | (ft) | (gpm) | (inch) | (lb) | Diameter | Height | 460 V |
| P6370 | 6 | 50 | 29 | 2325 | 2.4 | 1683 | 38.8 | 65 | 75.3A |
| P8370 | 8 | 50 | 29 | 2325 | 2.4 | 1696 | 38.8 | 65 | 75.3A |