




Aurora MD CO2 Isotope Lasers



Dual Delivery Isotope CO2 Laser System



Aurora MD CO2 Isotope Lasers

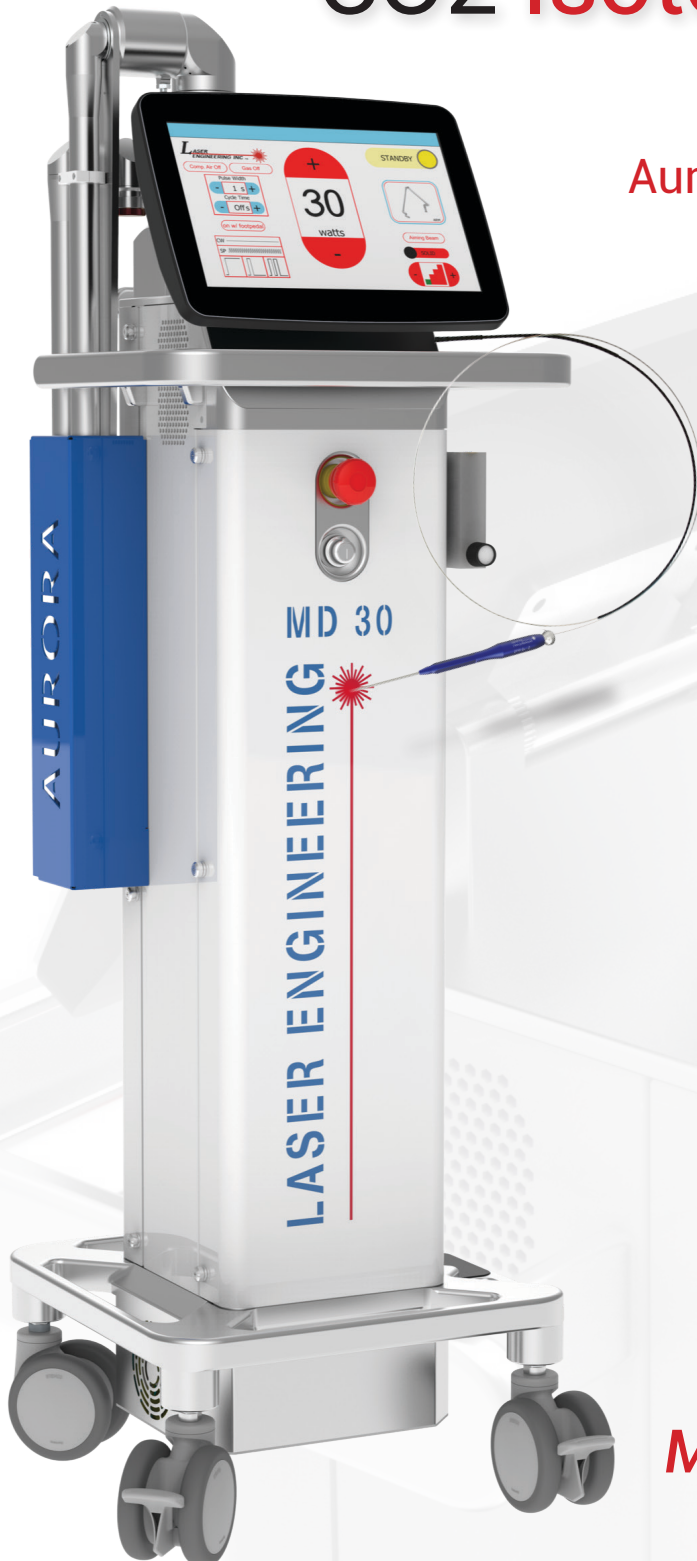

Aurora MD30 Key Benefits

- 30-watt CO2 Laser
- Selectable Dual Beam Delivery- Articulating Arm or the UltraLase Hollow Waveguides
- RF excited laser technology
- Isotope C-13 provides a sharp focused beam-eliminating Thermal Blooming
- Extremely Safe & Stable laser power to tissue
- Continuous Wave, Pulsed or Super Pulse Modes
- Aiming Beam- use with the Articulating Arm or the UltraLase Hollow Waveguides
- Multi-specialty
- 12" Large Colored HDMI Touchscreen
- Milli-Watt Settings
- Milli-second Pulse Widths
- Easy-to-use Software
- Mobile-small footprint, Lightweight 360 Shock Absorbing Casters
- Three years Laser Tube Warranty- One Year Parts & Labor Warranty

MADE in the USA

Dual Delivery Isotope CO2 Laser System

UltraLase Hollow Waveguides

UltraLase Hollow Waveguides


- HWG 500 HeNe *NEW*
- HWG 500-300 Micron Spot-size (for all specialties)
- HWG 300-200 Micron Spot-size (for all specialties)
- HWG 300 OTO Metal Tip for Otology

UltraLase Robotic Guide



UltraLase GYN Handpieces


UltraLase ENT Handpieces

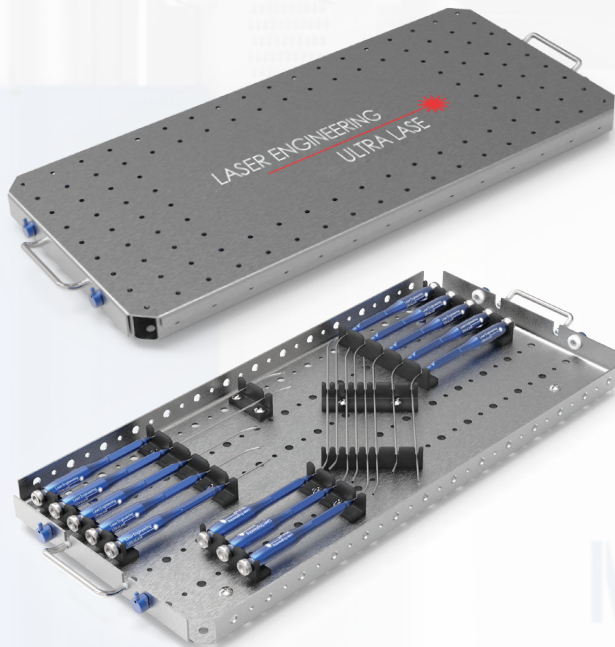

UltraLase GYN Handpieces

- Ergonomically Designed counterweighted handpieces reduce fatigue
- Clever Designed locking mechanism - Load and Unload waveguides with ease
- Large variety of lengths and bends
- Case specific for head and neck procedures
- Spatula tips for easy dissection

Aurora MD Laser Specifications

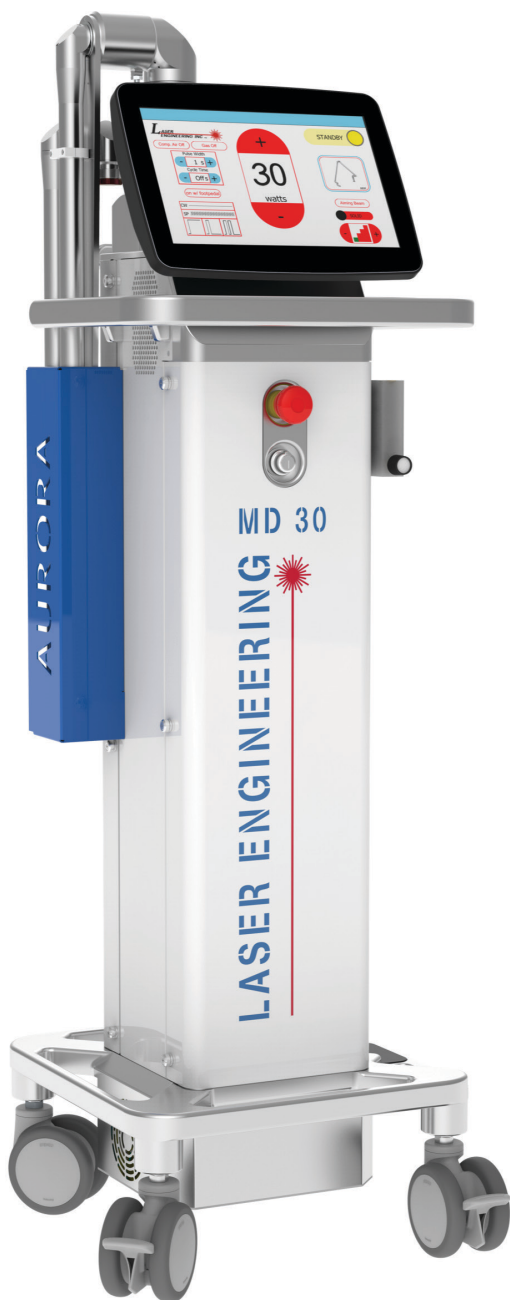

MADE in the USA

Power to Tissue	0.5-30 watts
Wavelength	11.2 microns
Beam Geometry	TEM ₀₀
Laser Configuration	RF Excited Ceramic Tube
Control Panel	12" Digital Touch Screen, Self Calibration Adjustable Height
Exposure Time	Variable up to Continuous with Repeat Mode
Super Pulse	0.5 to 15 watts
Aiming Beam	5mW Diode, adjustable
Spot Size	.10mm with 50mm handpiece .25mm with 125mm handpiece
System Height	52.0 inches
Arm Reach	45.0 inches
System weight	130 lbs.
Foot Print	16.0 x 16.0 inches
Electrical / Input	10 AMPS/115 VAC 50/60 Hz 800 VA
Cooling	Self-contained air cooled design
Warranty	3 year non-prorated Tube 1 year parts & labor



For More Information, contact Info@laserengineering.com
ph. 877.638.5872 | fx. 615.997.3388 | www.laserengineering.com