


TX-B105 LifePO4 BATTERY PACK



Key Features:

1. Longer Lifespan.
2. Improved Safety.
3. Fast Charging.
4. Wider Operating Temperature Range.
5. High Energy Density.
6. Eco-Friendly.
7. Low-Maintenance.
8. Low Self-Discharge Rate.

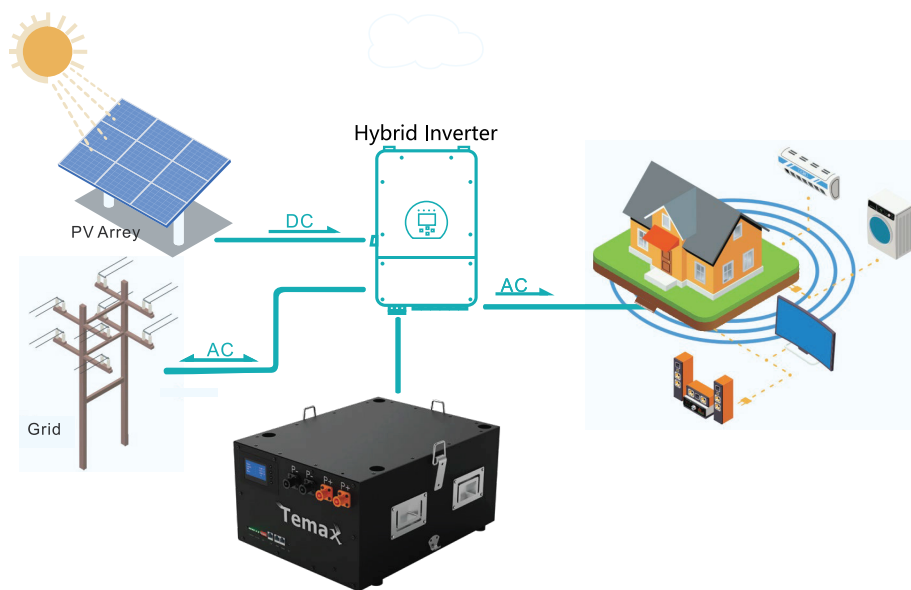

info@temax-solar.com

©2023 Temax International Co. Ltd

Specifications:

Basic Parameters	TX-B105
Nominal Voltage (V)	51.2V
Nominal Capacity (Ah)	105Ah @0.5C discharge current 25±2°C
Nominal Power (Wh)	5.38KWh
Dimension (mm)	460*353*225mm
Weight (Kg)	47KG± 2KG
Discharge Cut-off Voltage (V)	44V
Charge Voltage (V)	56.4V
Continuously Charge/Discharge Current (A)	50A @25±2°C (Recommended)
Working Temperature	0~50°C(Charge)
	-10~50°C(Discharge)
	-20~55°C(Storage)
SOC Range	5%-100%
Recommended SOC Range	10-90%
Communication Interface	CAN (Default)or RS485
Humidity	10% - 85%
IP level	IP 20