


TX-B280 LifePO4 BATTERY PACK



Key Features:

- 1. Longer Lifespan.
- 2. Improved Safety.
- 3. Fast Charging.
- 4. Wider Operating Temperature Range.
- 5. High Energy Density.
- 6. Eco-Friendly.
- 7. Low-Maintenance.
- 8. Low Self-Discharge Rate.

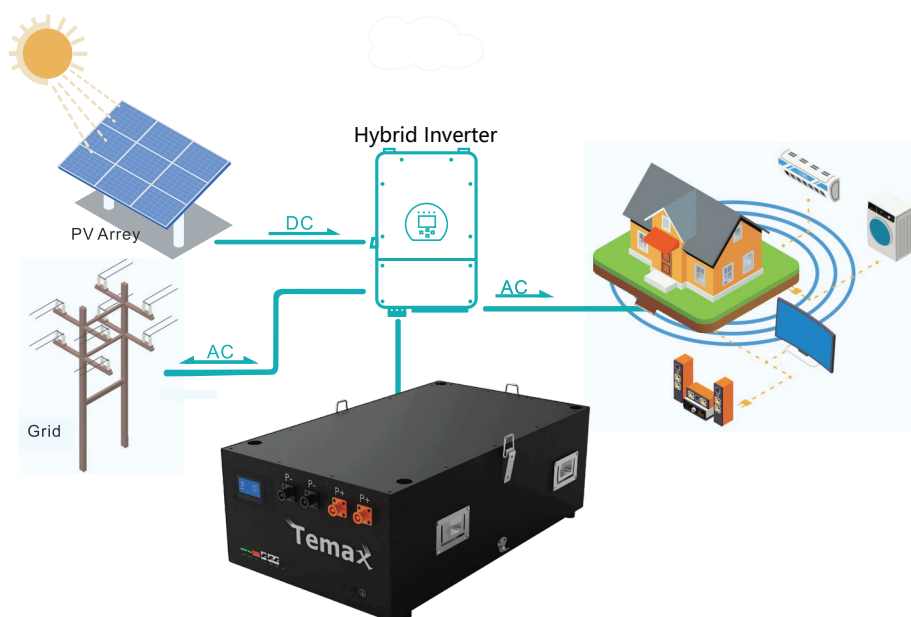

info@temax-solar.com

©2023 Temax International Co. Ltd

Specifications:

Basic Parameters	TX-B280
Nominal Voltage (V)	51.2V
Nominal Capacity (Ah)	280Ah @0.5C discharge current 25±2℃
Nominal Power (Wh)	14.3KWh
Dimension (mm)	750*440*251mm
Weight (Kg)	112±5KG
Discharge Cut-off Voltage (V)	44V
Charge Voltage (V)	56.4V
Continuously Charge&Discharge Current (A)	140A @25±2℃ (Recommended)
Working Temperature	0～50℃(Charge)
	-10～50℃(Discharge)
	-20～55℃(Storage)
SOC Range	5%-100%
Recommended SOC Range	10-90%
Communication Interface	CAN (Default)or RS485
Humidity	10% - 85%
IP level	IP 20