

TECHNICAL SPECIFICATION - OVERVIEW

ELECTRICAL

Input voltage: 120 V 50/60 Hz

Heater specification: 1500 W (maximum)

UV light specification: 120 mW peak

Amp: Dedicated 15A circuit suitable for one (1) appliance

CONSTRUCTION

Finishes:

Brushed Chrome
 Polished Chrome
 Brushed Nickel
 Polished Nickel
 Brushed Satin Gold
 Polished White
 Matte Black
 Polished Black

Custom Finishes

Backplate mounting bracket: Stainless steel

Water ingress: IP23

Mounting hardware provided

Max toilet paper dimensions: 4.5 L x 5.3" dia. OD

Wire installation: 12-14 AWG

OPERATIONS

Sound pressure level: < 60 dBa

Operation temperature range: 32°-104°F / 0°-40°C

Nominal battery charge time: 3.5 Hours

ACCREDITATIONS

ADA Compliant

UL Mark

CE Mark

FCC Compliant

ROHS Compliant

REACH Compliant

WEEE Compliant

Supports LEED Certification



DIMENSIONS

Length: 12.6 inches

Width: 7.4 inches

Depth: 4.7 inches

Product weight: 1001 - 5 lbs, 1002 - 10 lbs

LOGISTICS


Unit part number:

1001 - Hot Cheeks AC - Direct (A) or Plug (B)

1002 - Hot Cheeks DC

Packaging:
 Single, Multipack, Pallet Available

TECHNICAL SPECIFICATION

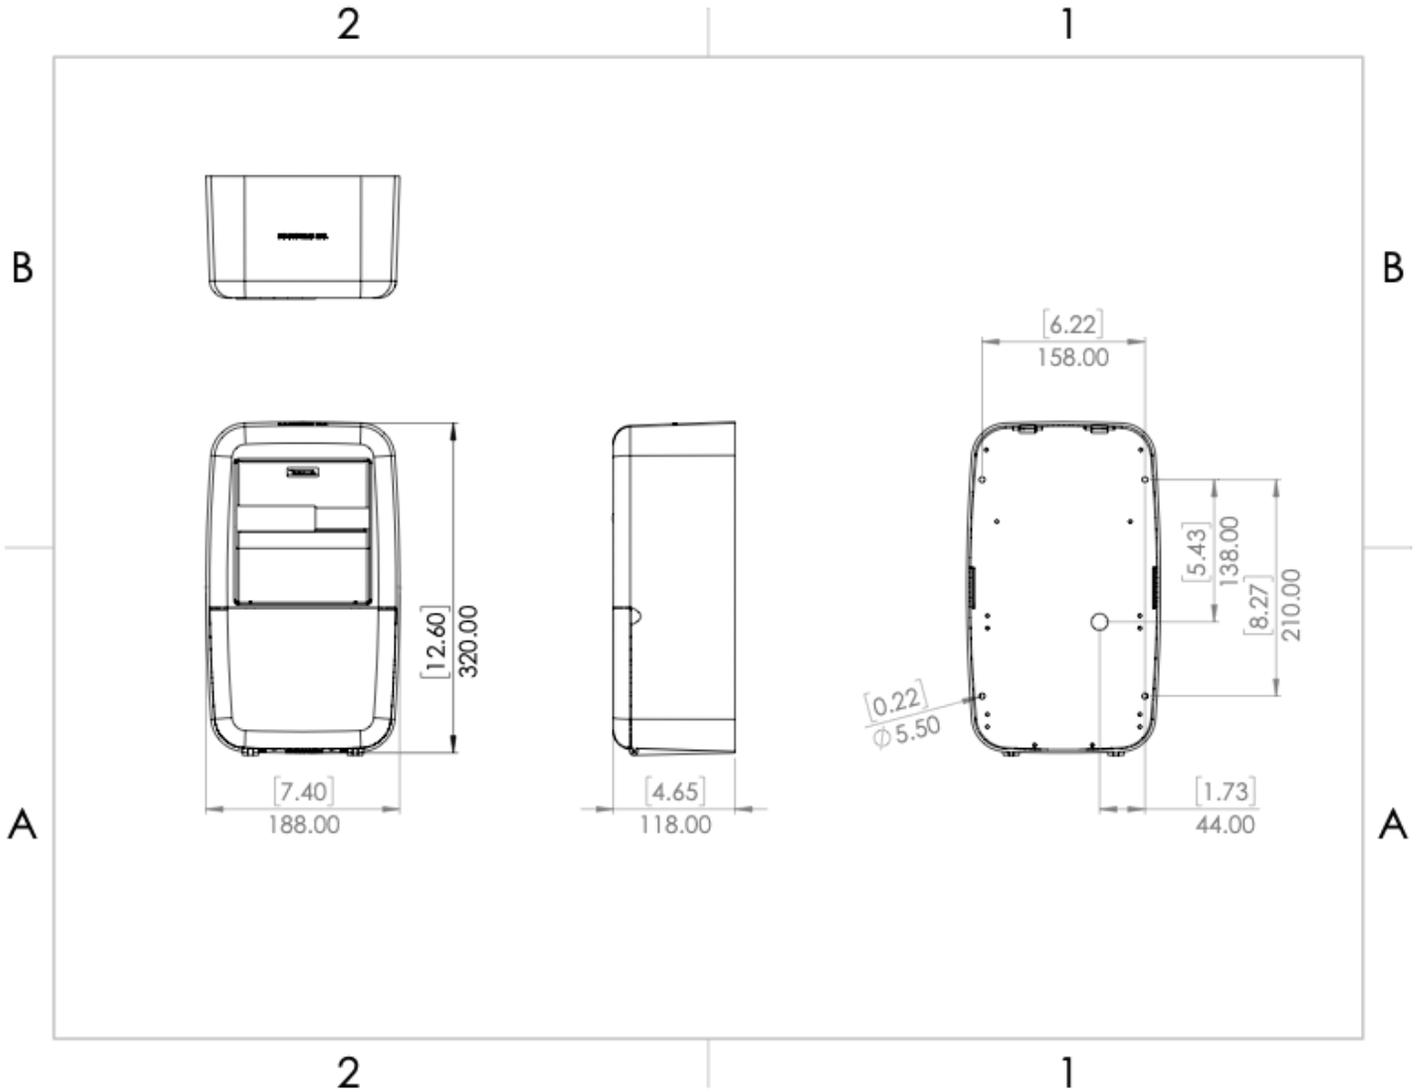

Measurements Above Displayed in [inches] and millimeters/centimeters.

LOGISTICS

Hot Cheeks - AC

USA unit part number: 1001

Europe unit part number: 2001

Canada unit part number: 3001

Mexico unit part number: 4001

Hot Cheeks - DC

Unit part number: 1002

Europe unit part number: 2002

Canada unit part number: 3002

Mexico unit part number: 4002