






GALLIUM

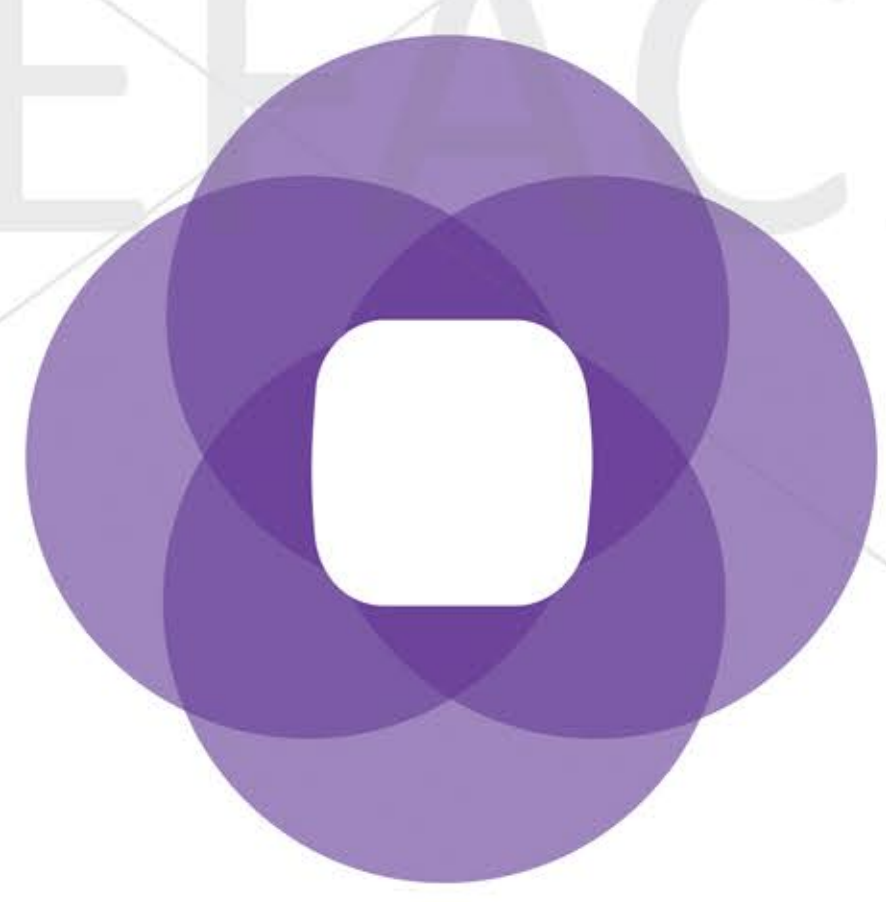

ERW HF Tube Mills

- From 10 mm to 355 mm OD
- Upto 16 mm Thickness
- High Speed Tube Mills
- Japanese Technologies

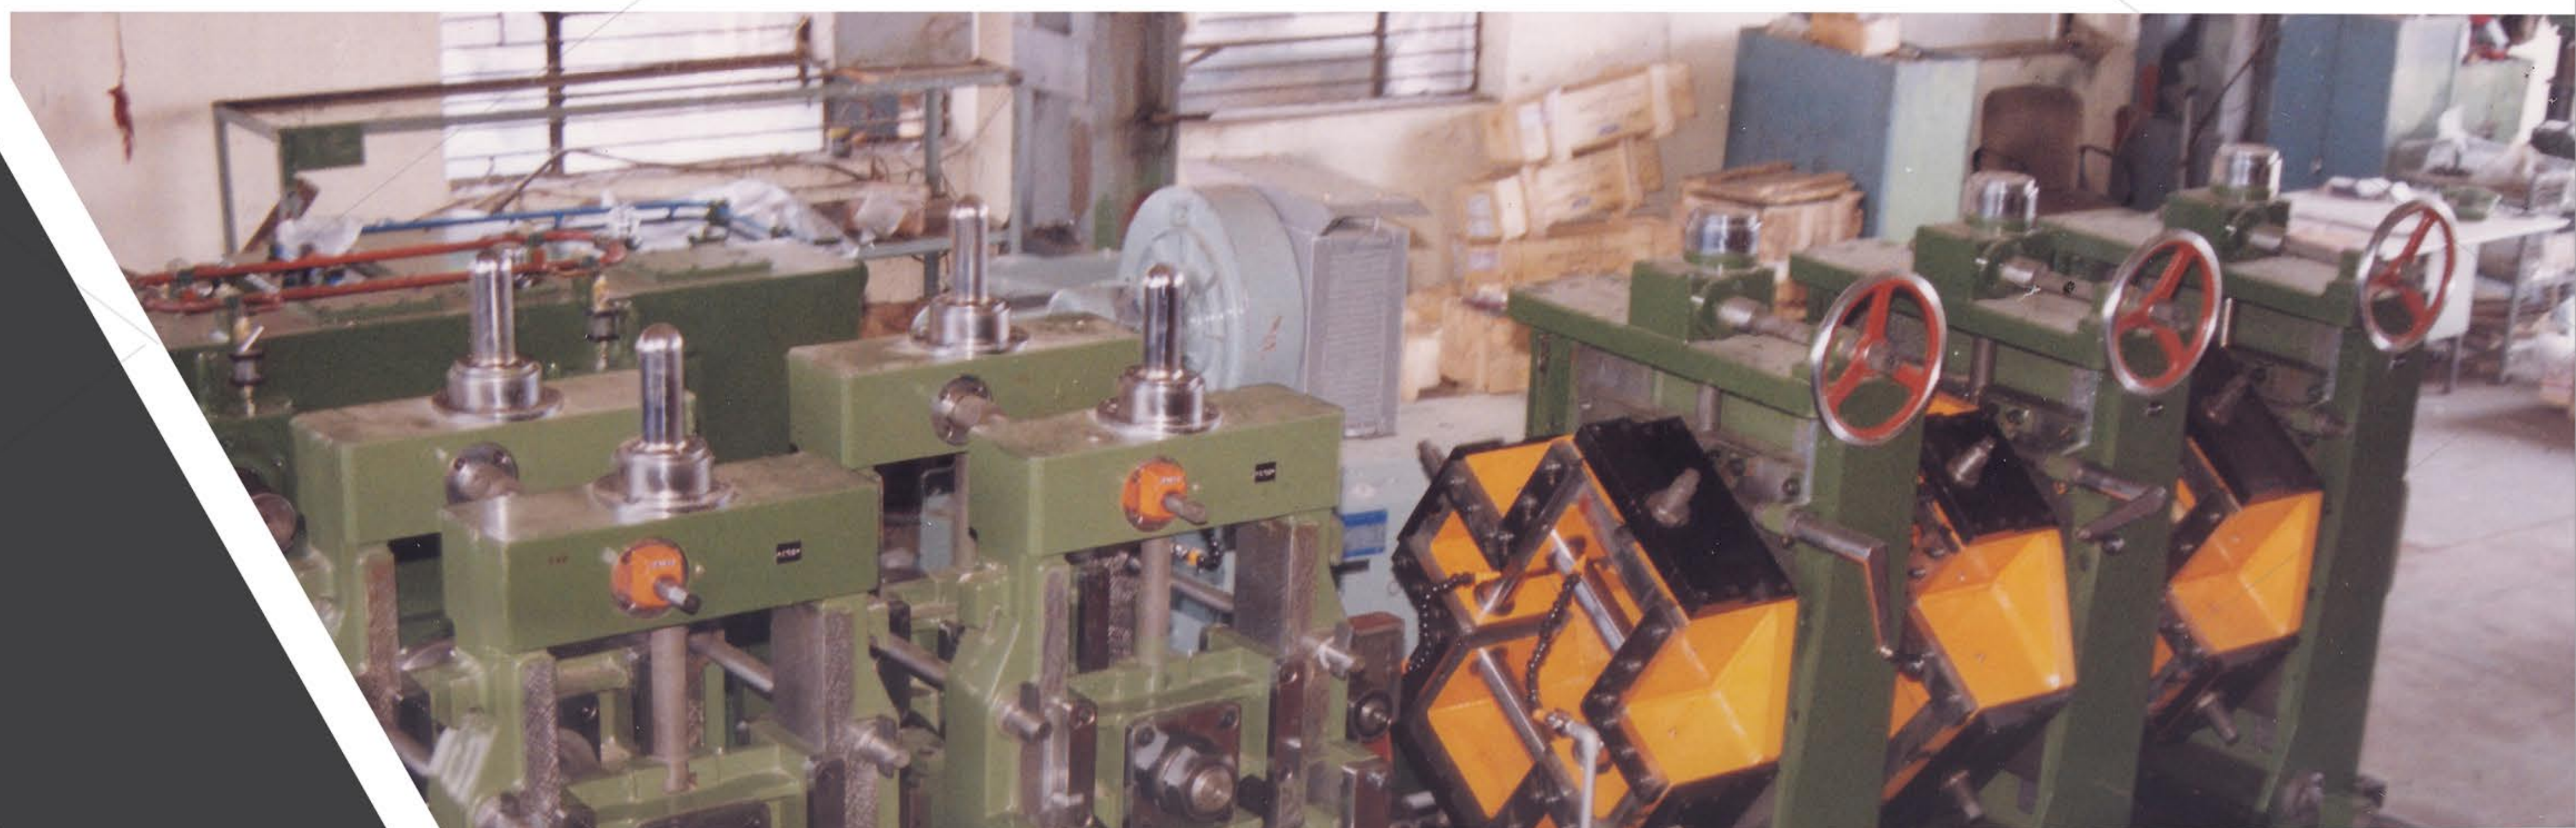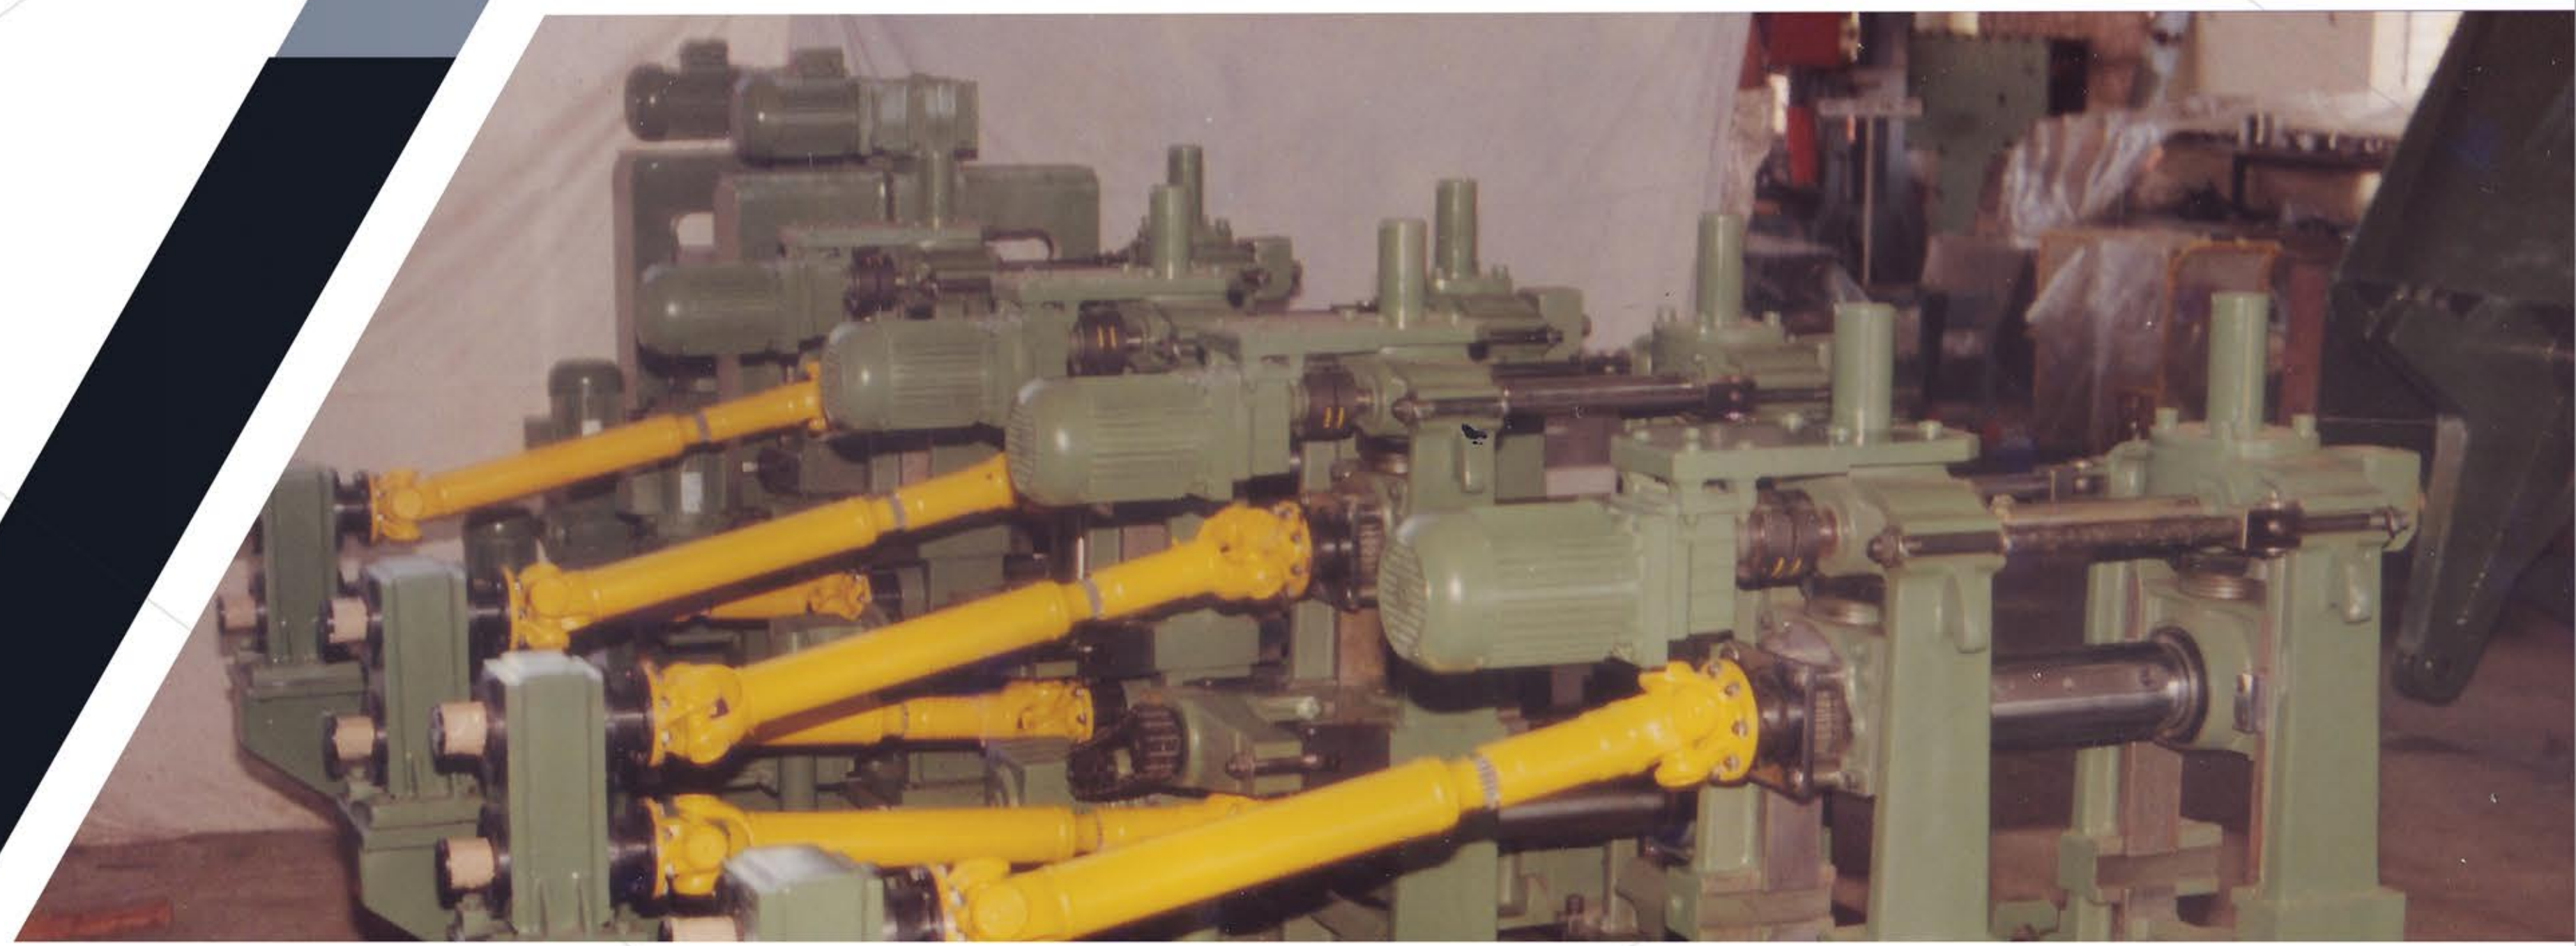

Features


- Conventional HF ERW Tube Mills
- Cassette Type - Rafted Tube Mill with Quick Changeover Features Gallium - Common Roll Mill - with CNC Motorized Tool Adjustment
- FFX Mills
- DFT (Direct Forming Technology)

Gallium Equipment Pvt Ltd.

Reach us: +91-9910602173

sales@galliumholdings.com


www.galliumholdings.com

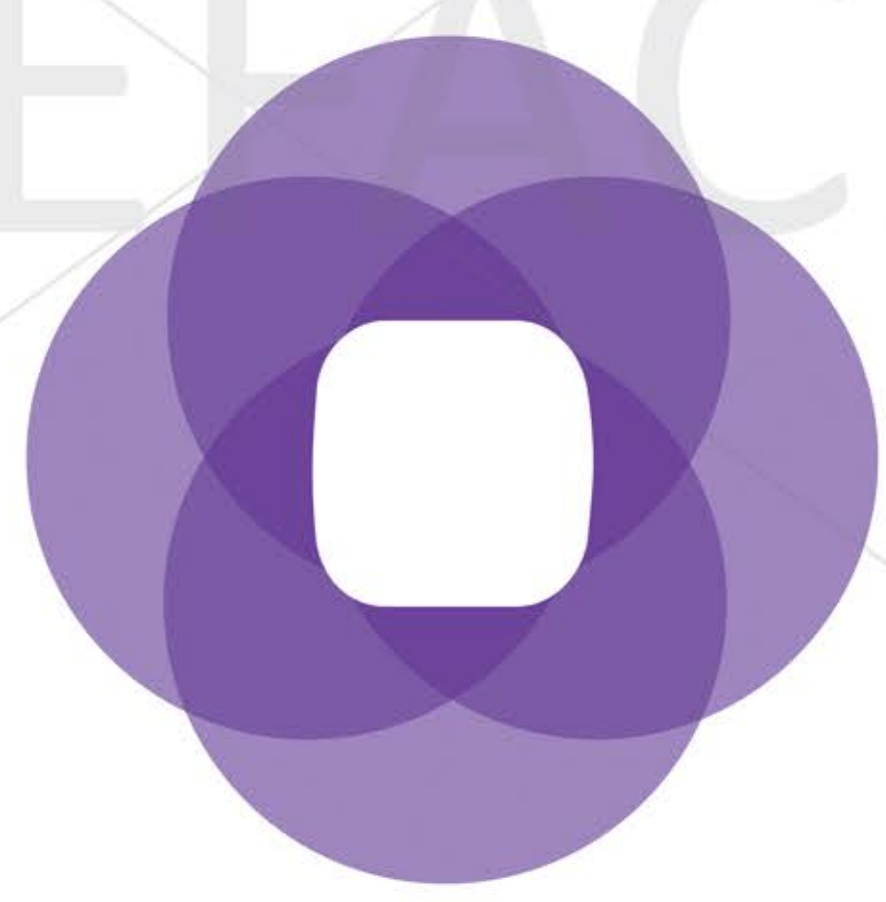

GALLIUM




COLD SAW (Single/Double Blade)

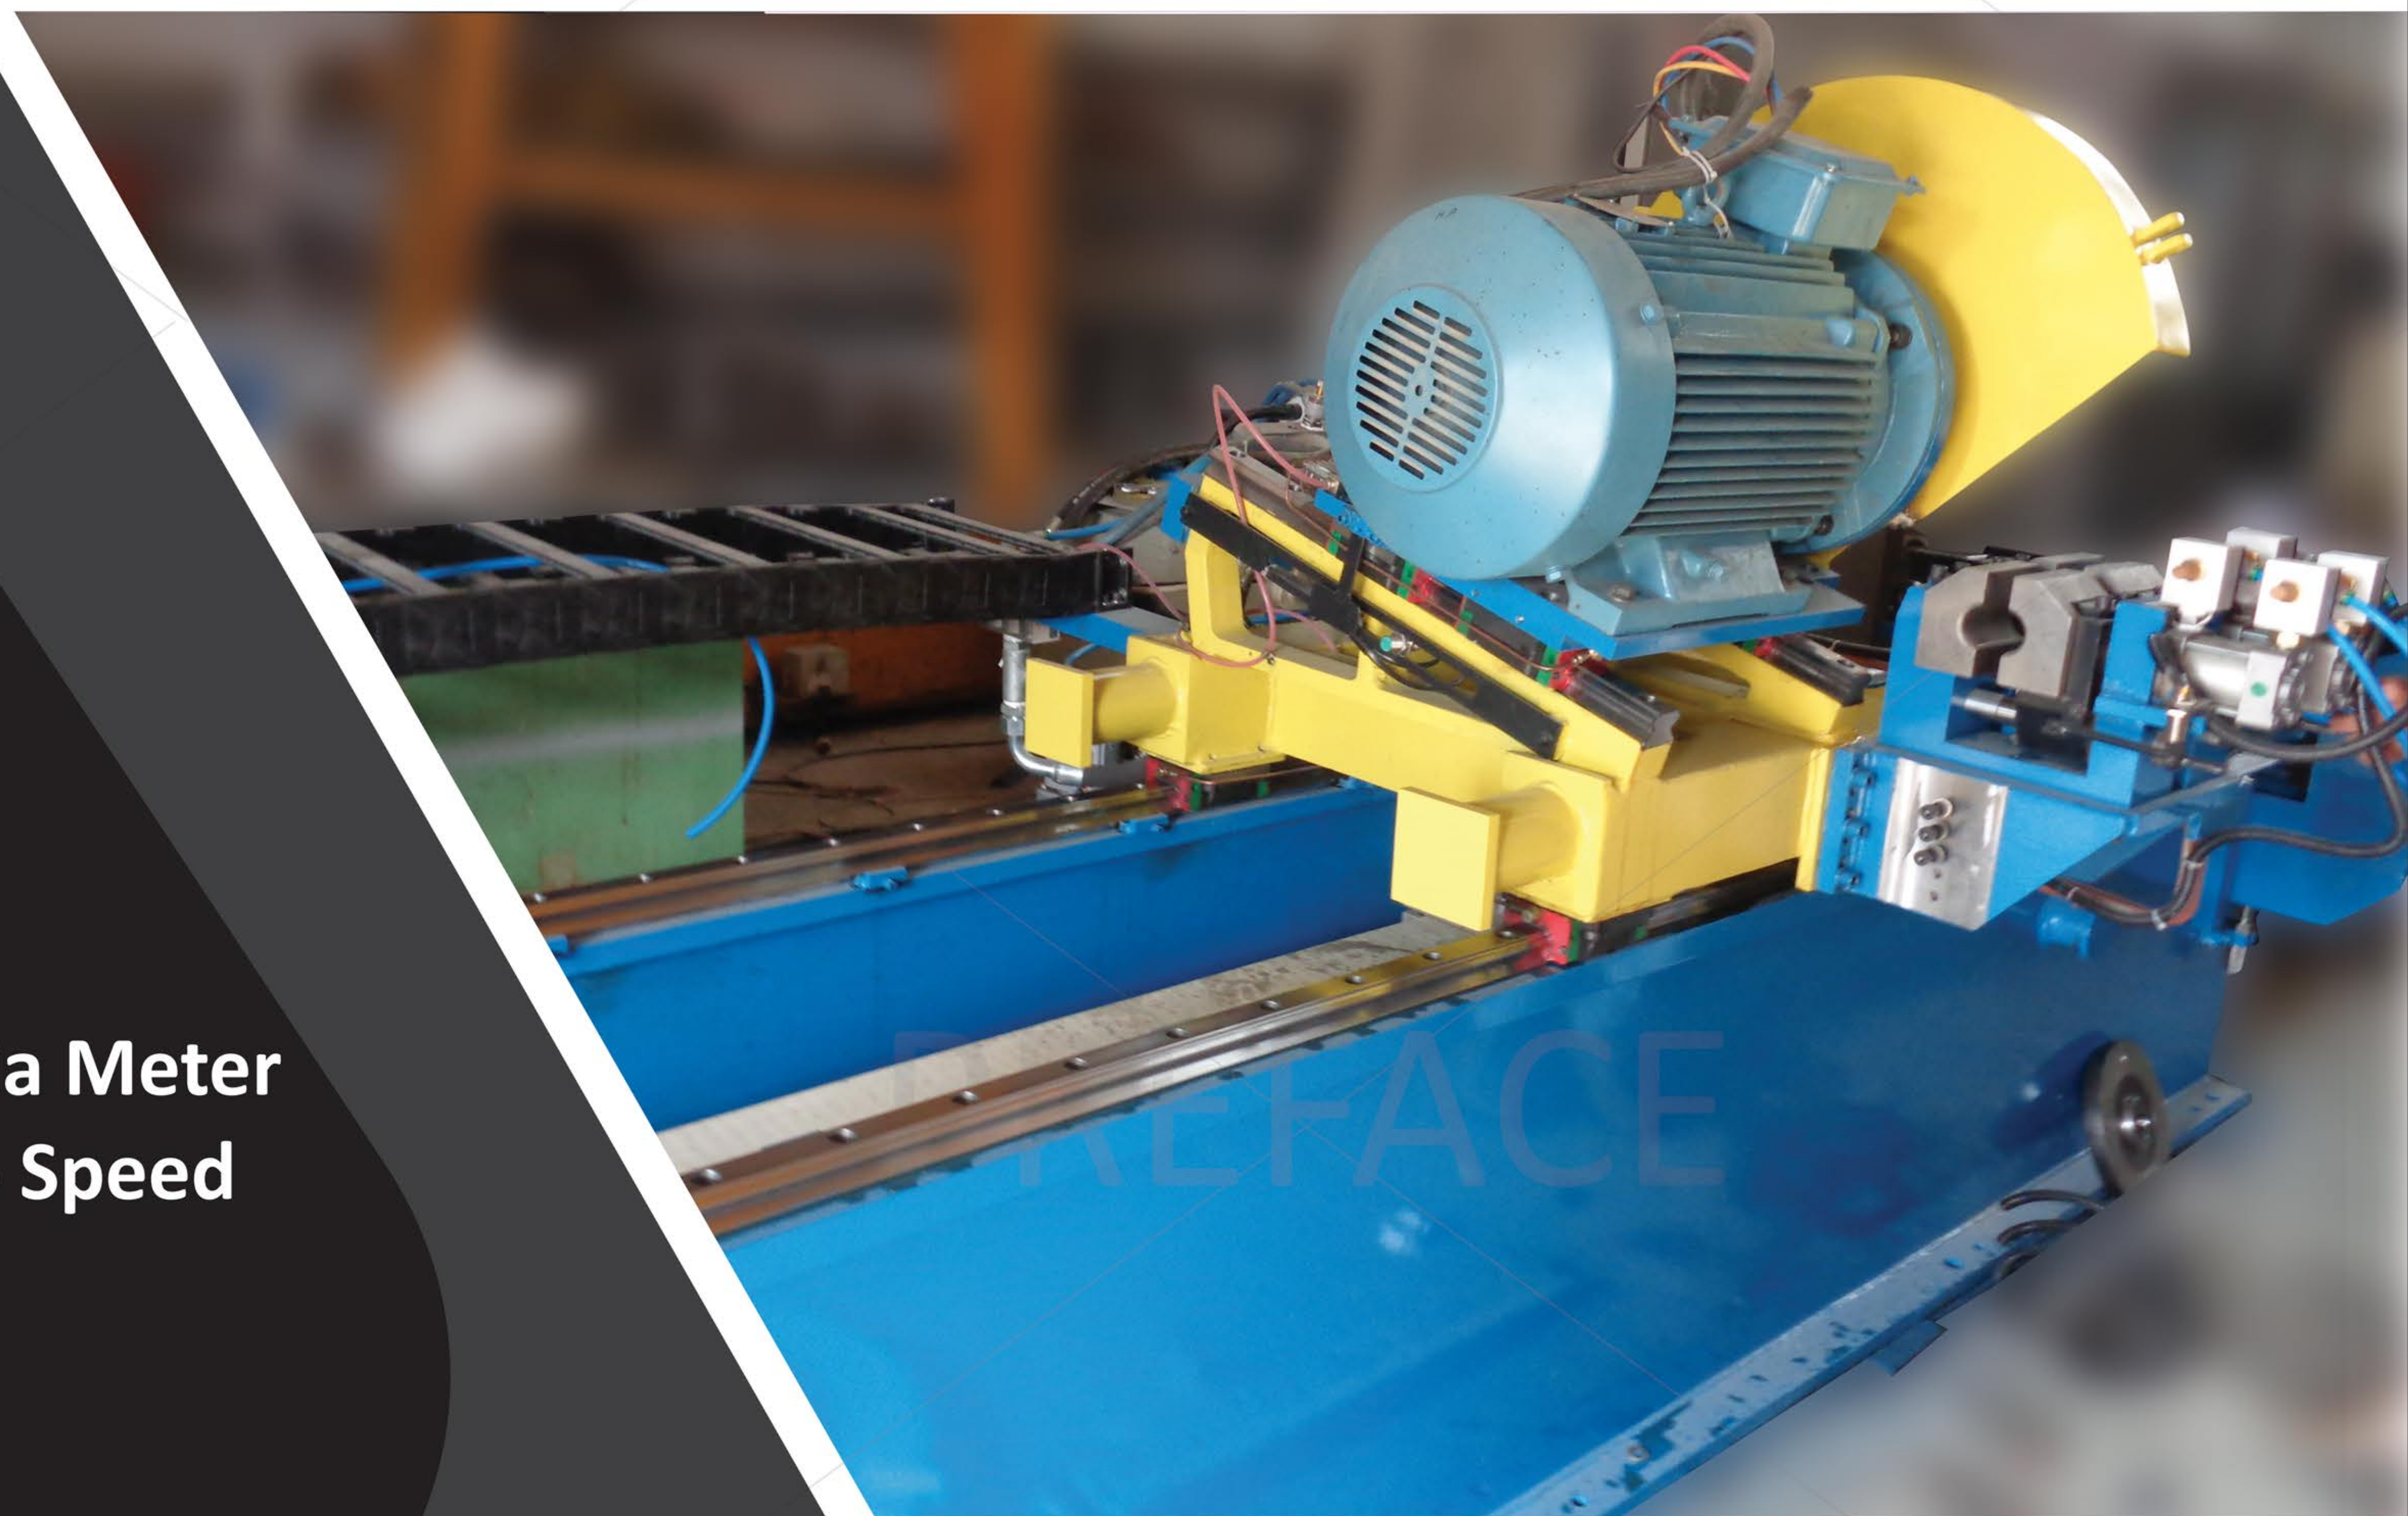

- Upto 16 Inches Outside Dia Meter
- Upto 150 Mtre Per Minute Speed
- Bur-free Cutting
- ± 1 mm Length Accuracy
- European Technology

Gallium Equipment Pvt Ltd.

Reach us: +91-9910602173
sales@galliumholdings.com
www.galliumholdings.com

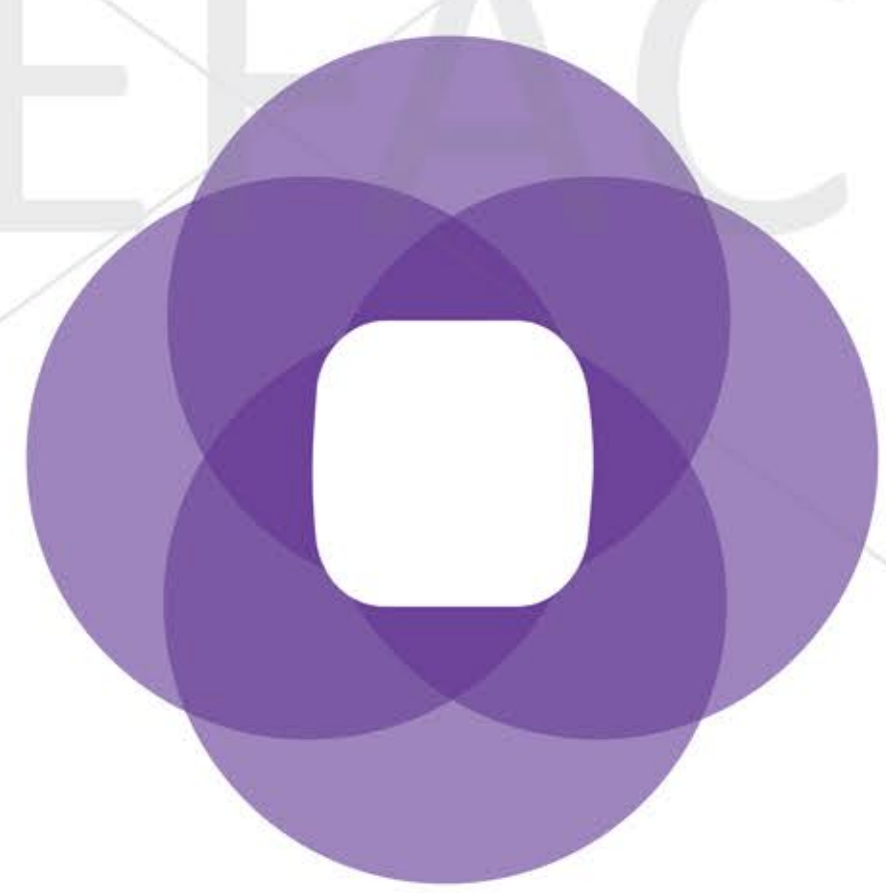

GALLIUM



TUBE STRAIGHTENING MACHINE


- 6 Cross Roll type
- 10 Cross Roll Type



MODEL	OD RANGE	Tube Thickness	Maximum Speed
GEPL - ST -22-6CR	10- 32.0 mm	4 mm	50-75 mpm
GEPL -50 - 6CR/10CR	13.0 - 75.0 mm	5 mm	60-90 mpm
GESPL - ST -6CR	25.0 - 114.0 mm	6 mm	60-90 mpm
GEPL - ST -114-6CR	40.0 - 140.0 mm	8mm	50-75 mpm
GEPL - ST -140-6CR	40.0 - 169.0 mm	12mm	30-60 mpm
GEPL - ST -175-6CR	60.3 - 219.3 mm	16mm	30-60 mpm

Gallium Equipment Pvt Ltd.

Reach us: +91-9910602173
sales@galliumholdings.com
www.galliumholdings.com

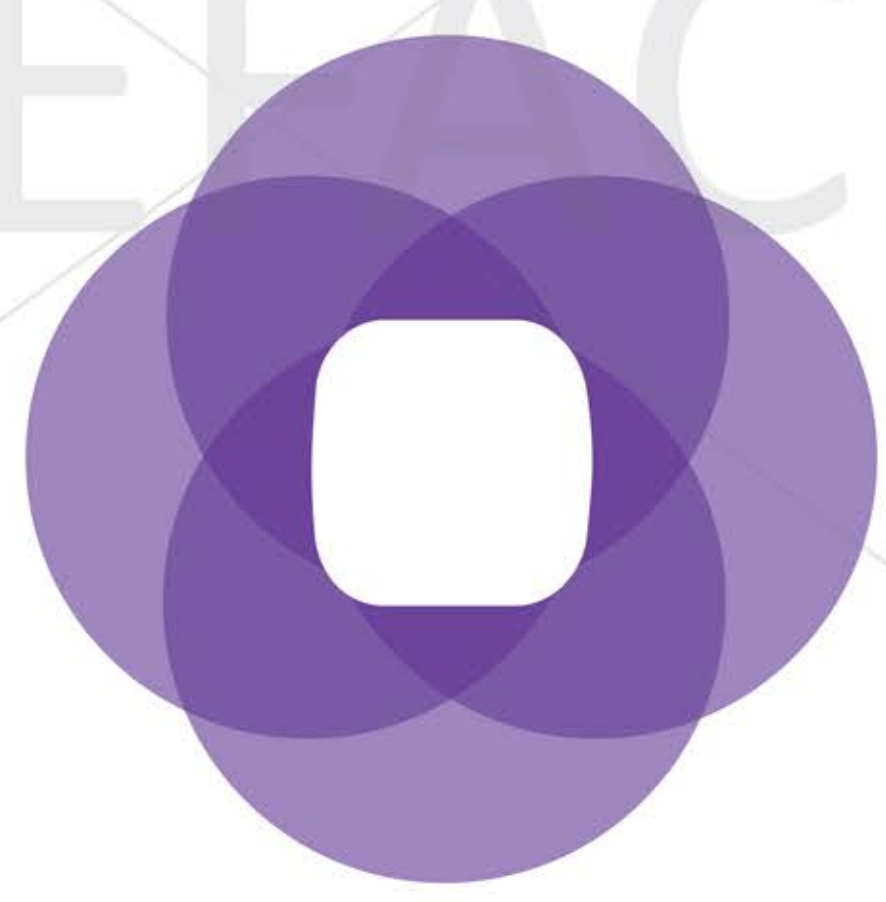


GALLIUM



TUBE HYDROTESTER


- Single Tube
- Triple Tube
- Upto 5000 PSI Oil /water Pressure

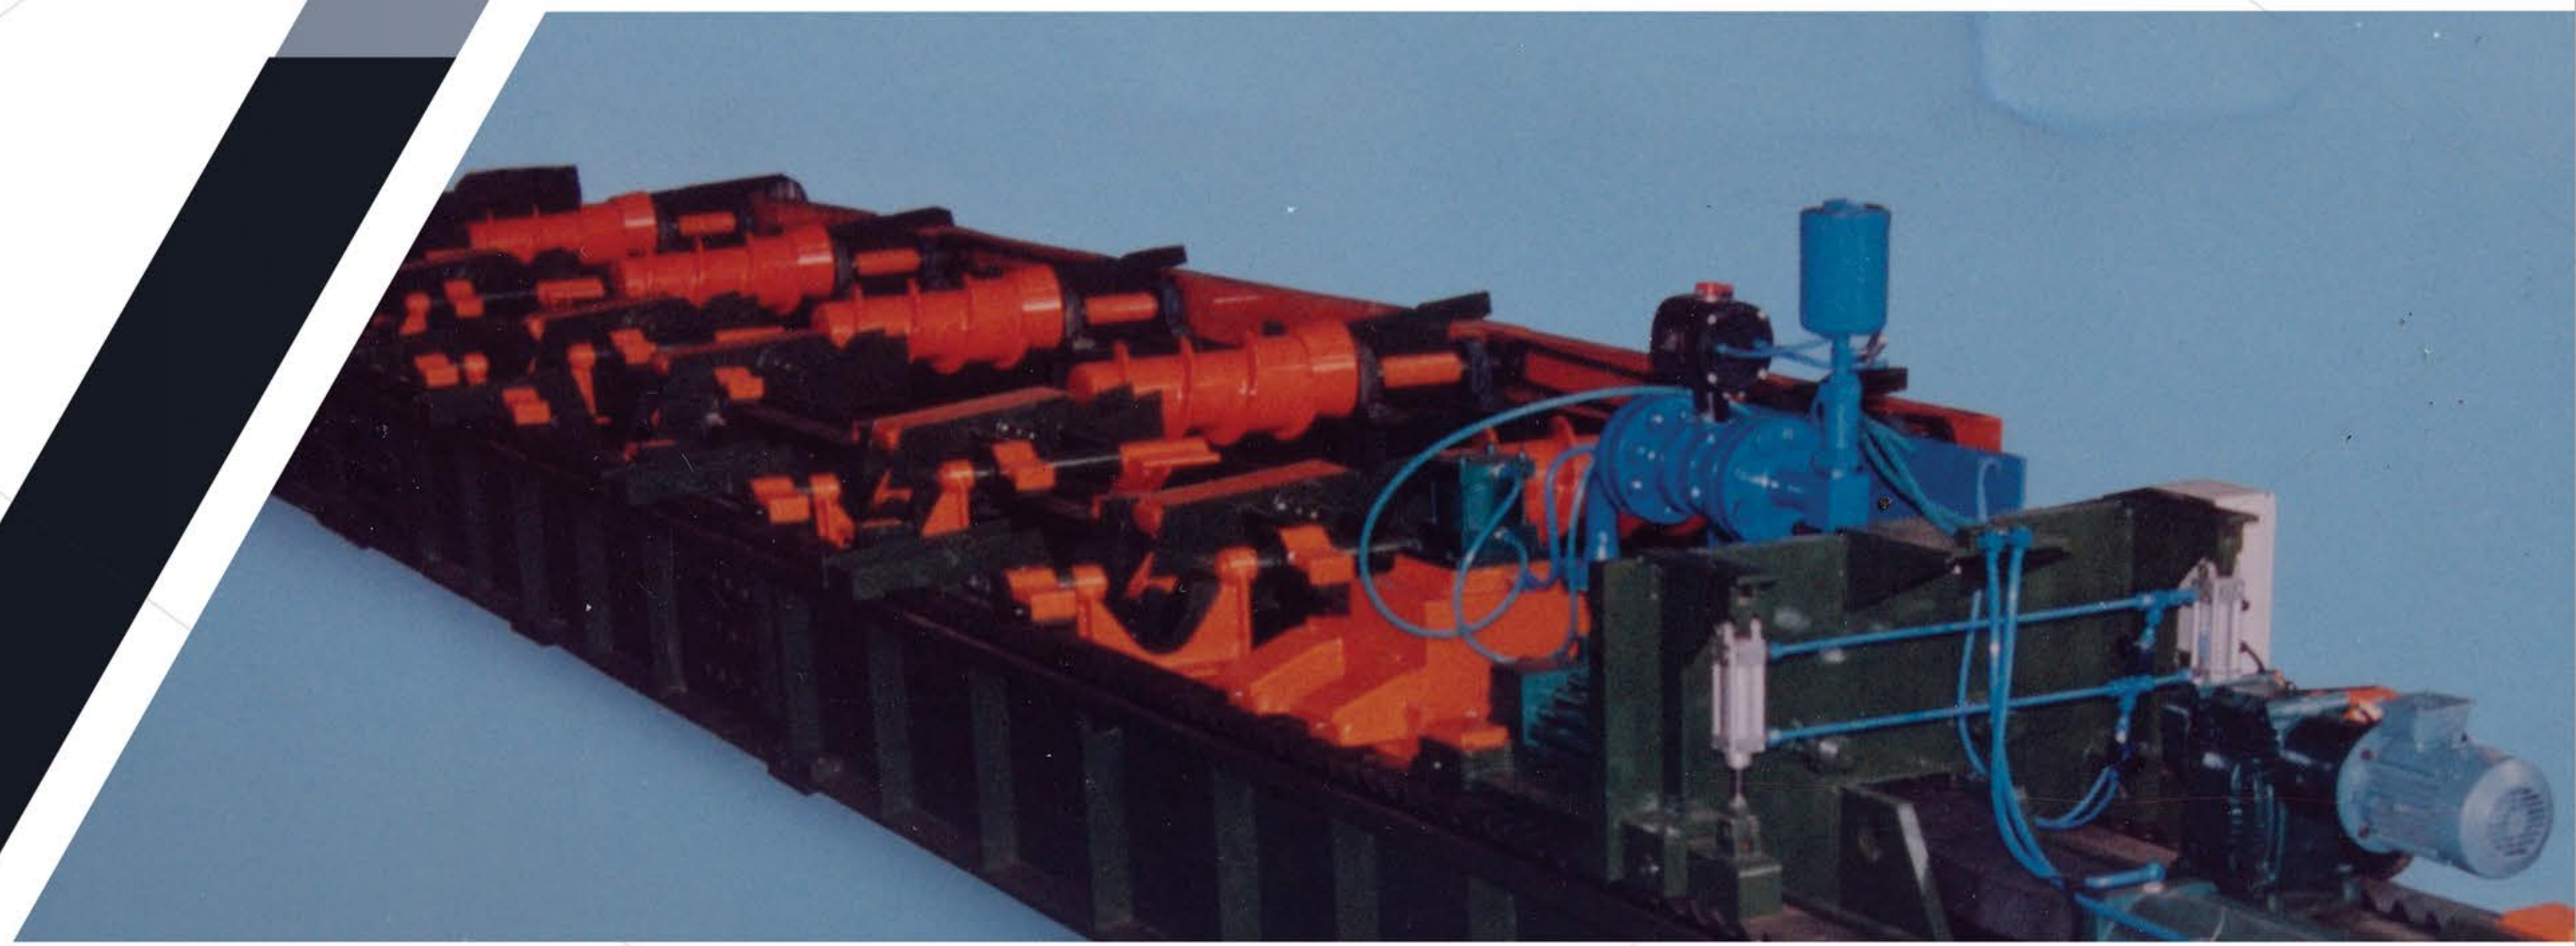

MODEL	OD RANGE	Tube Thickness	Test Pressure
GEPL - HT -30	12.7- 76.2 mm	0.8-3.5mm	UPTO 5000 PSI
GEPL - HT - 40 S/T	21.3 - 114.3 mm	1.2 x 5.4 mm	UPTO 5000 PSI
GEPL - HT - 60	60.3 - 168.3 mm	1.6 x 71.2 mm	UPTO 5000 PSI
GEPL - HT - 80	88.9 - 219.3 mm	3.0 x 8.2 mm	UPTO 5000 psi

Gallium Equipment Pvt Ltd.

Reach us: +91-9910602173
sales@galliumholdings.com
www.galliumholdings.com

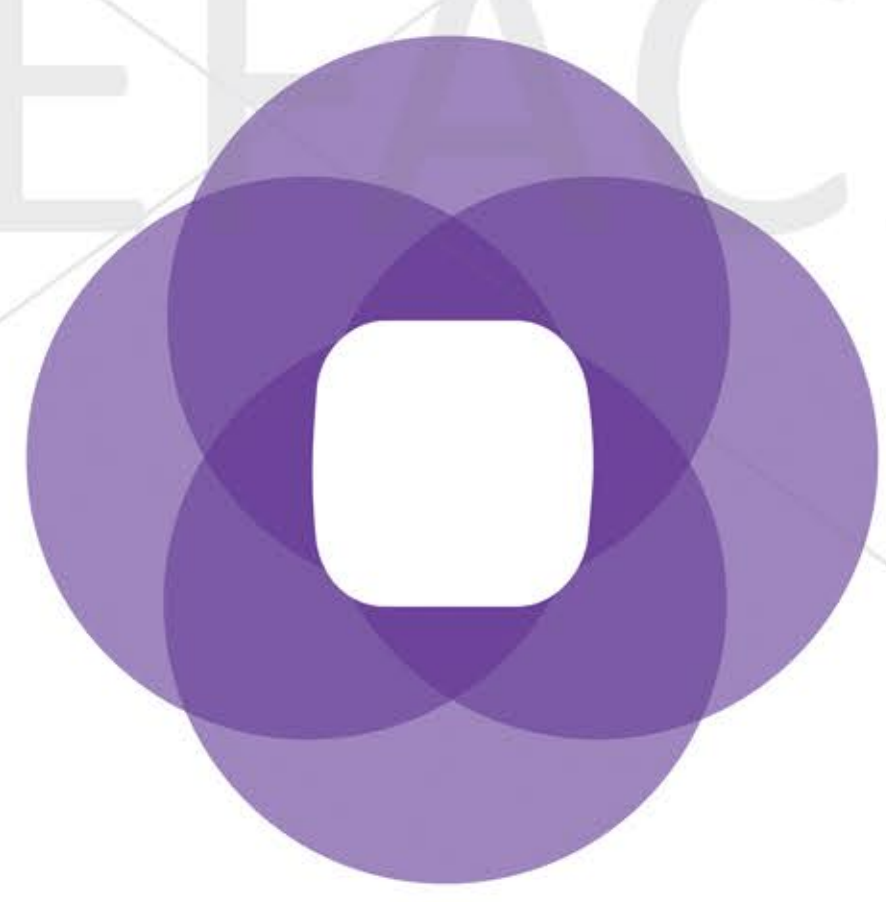

GALLIUM



TUBE PUSH POINTER


Gallium offers HYDRAULICALLY OPERATED Two/Four die tube PUSH POINTING MACHINE. The machine is also capable of nozzeling the point.



MODEL	Maximum Push Force	Maximum Tube OD
GEPL - PP - 50	23 MT	90 mm
GEPL - PP - 75	34 MT	130 mm
GEPL - PP - 75/100	34/68 MT	130 mm

Gallium Equipment Pvt Ltd.

Reach us: +91-9910602173
sales@galliumholdings.com
www.galliumholdings.com


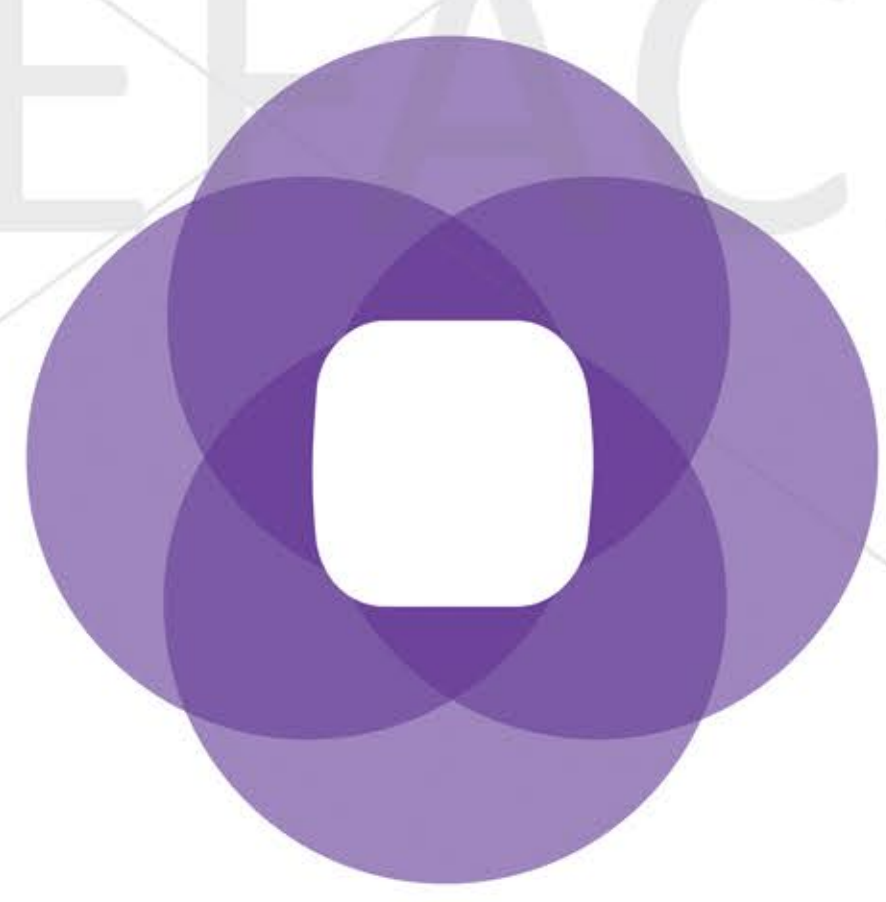


GALLIUM



TUBE BUNDLING MACHINE


Gallium automatic tube bundling machines can be used both offline and inline with high speed tube mills.

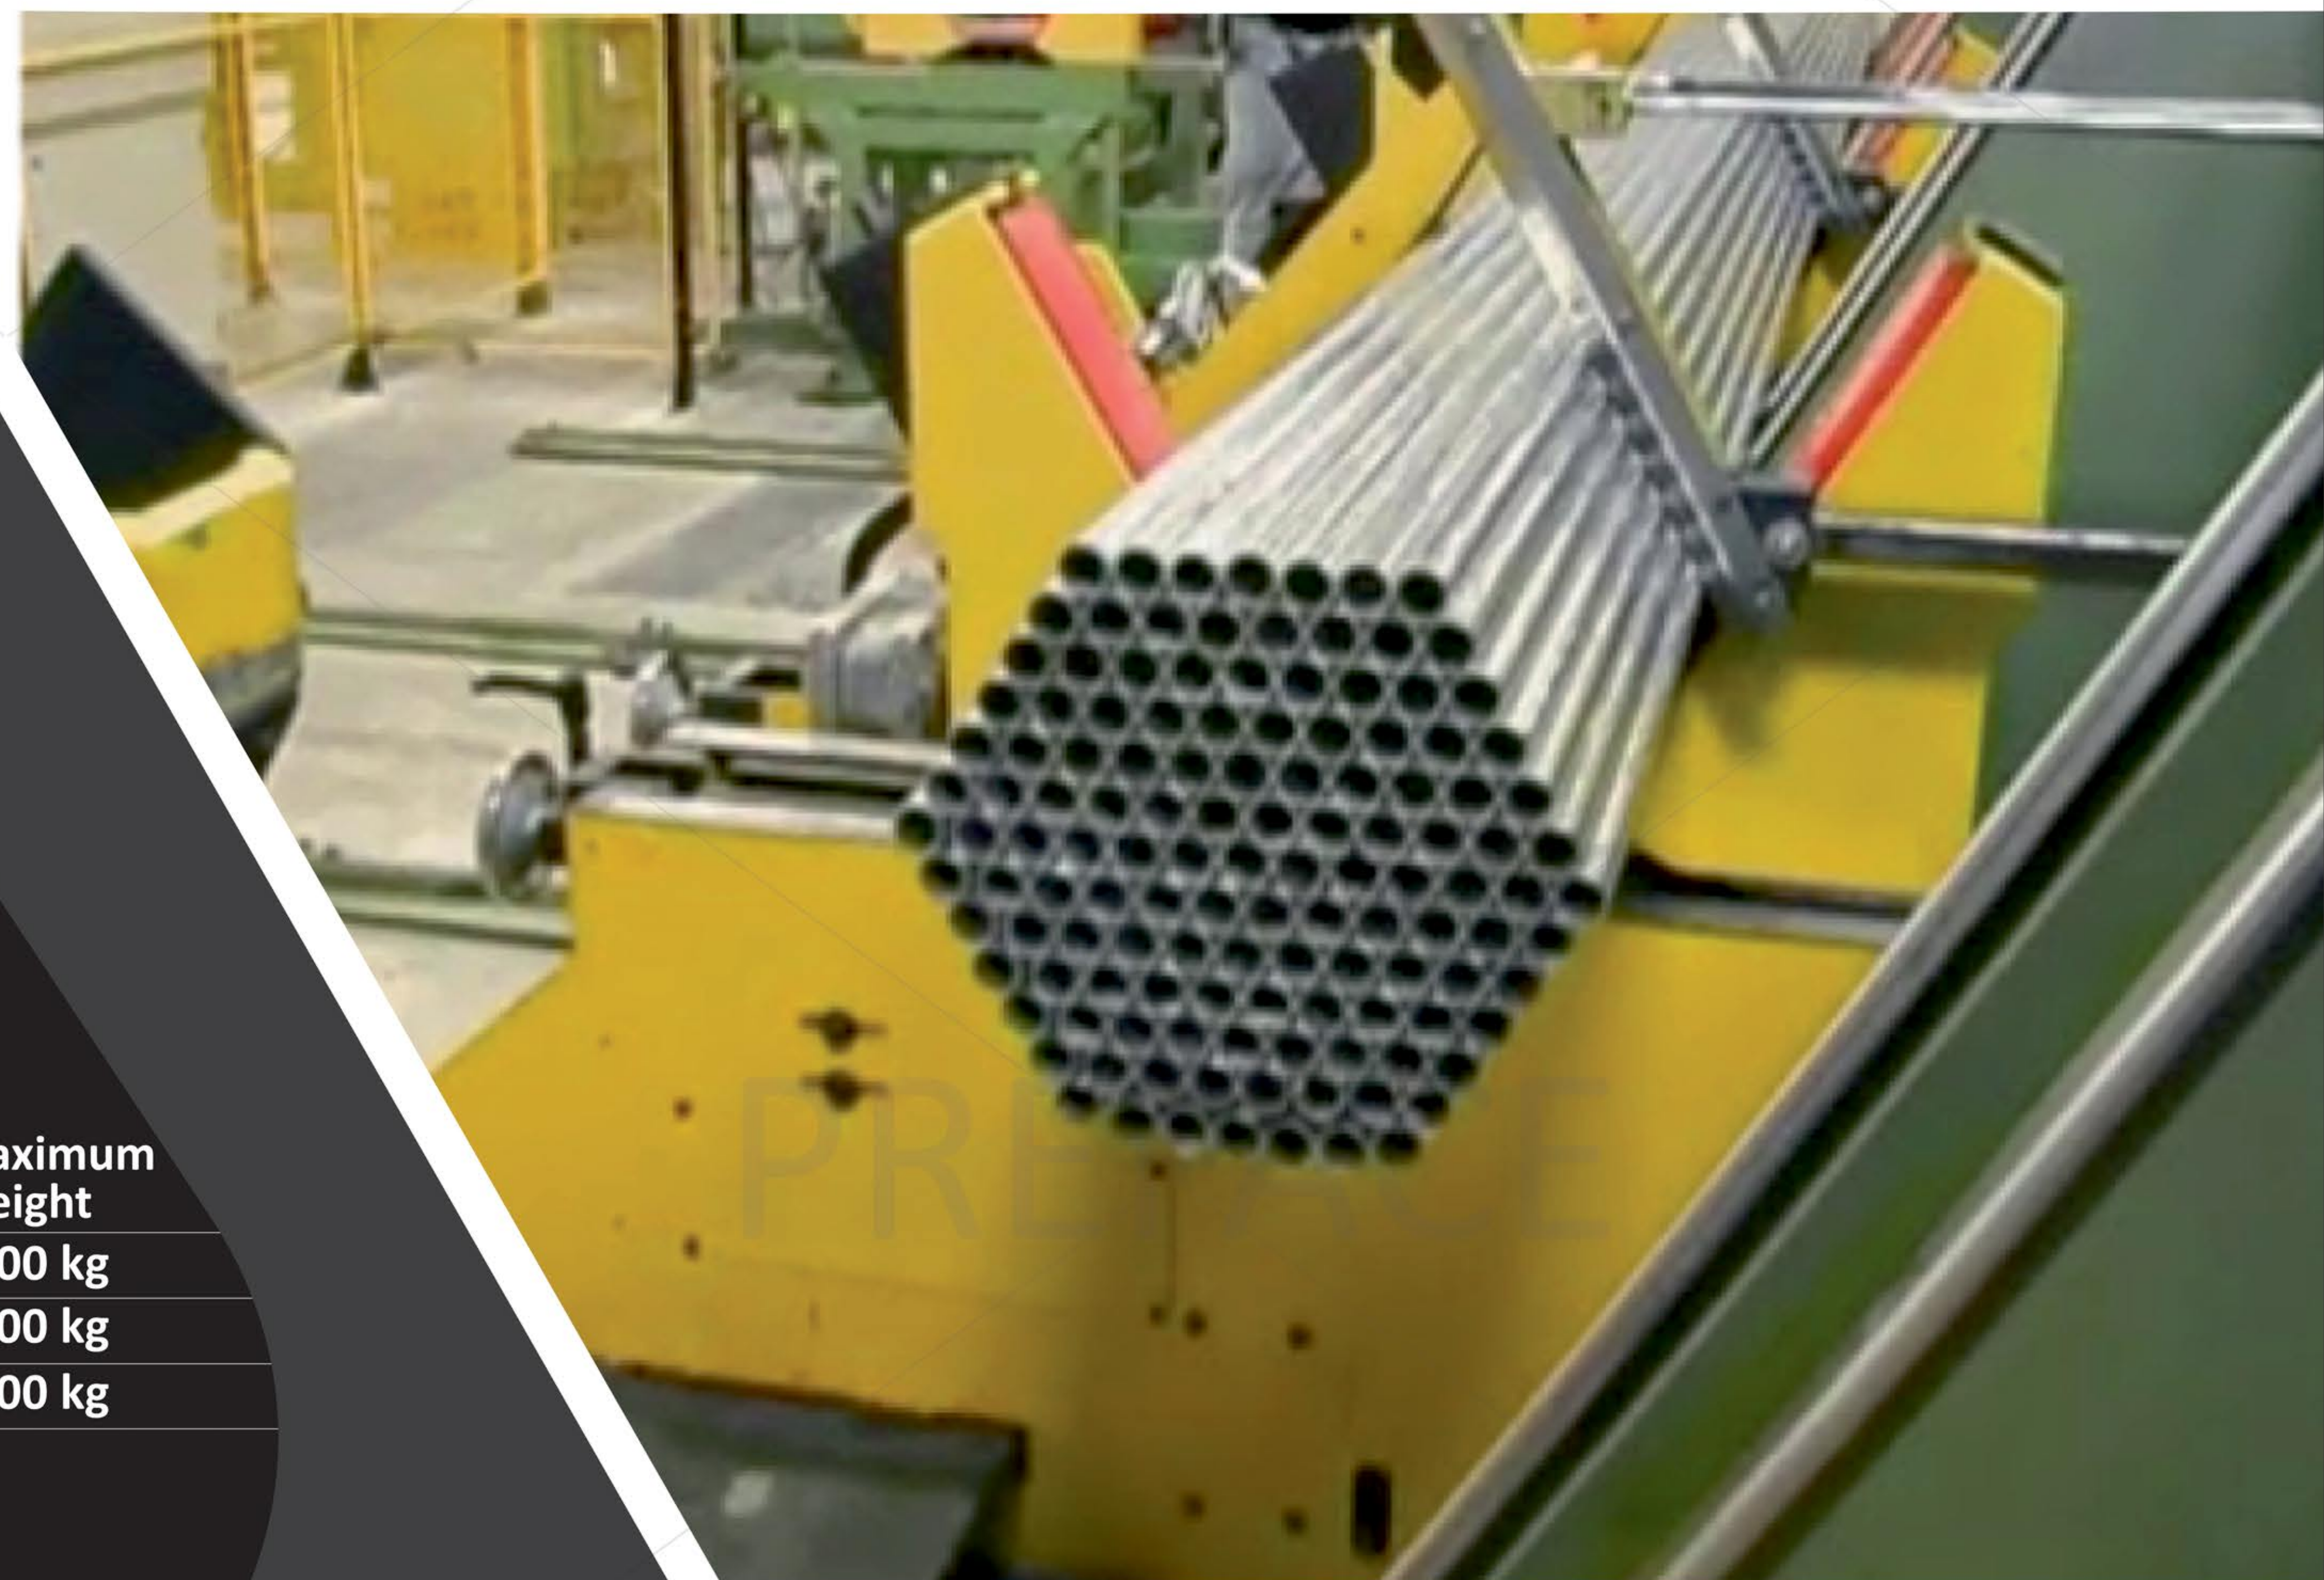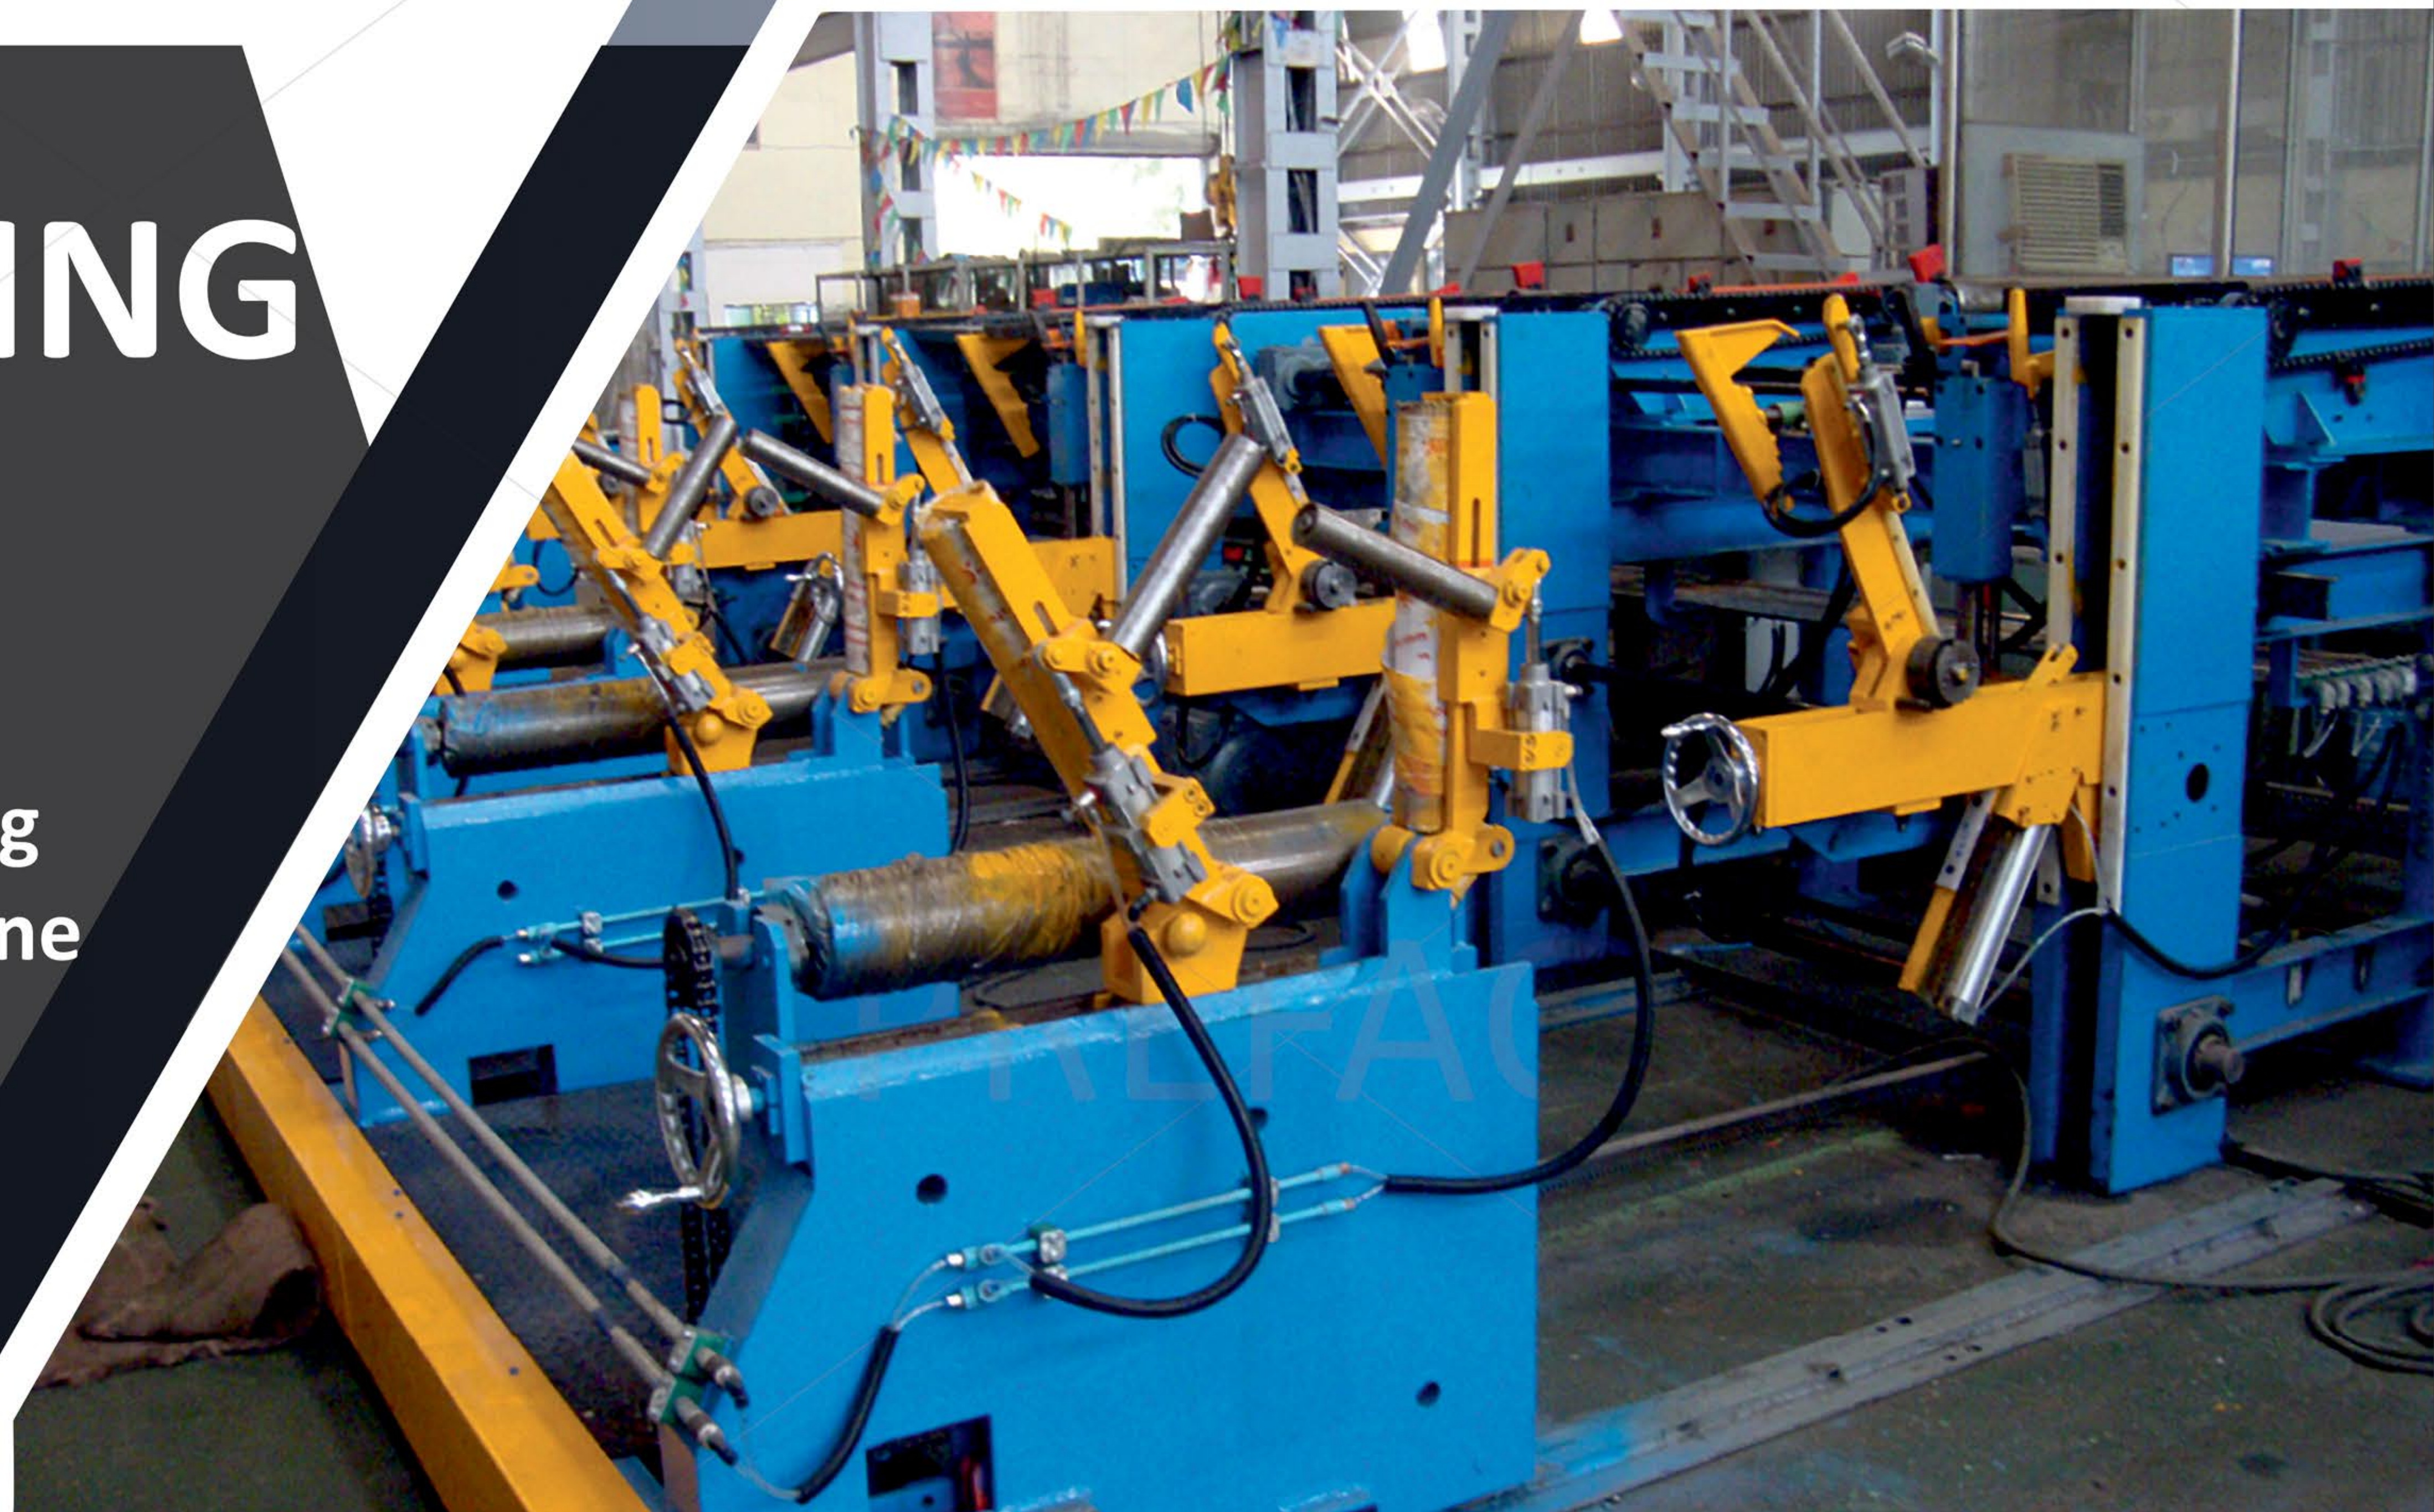

MODEL	Tube OD Range	Maximum Size	Maximum Weight
GEPL - BM - 50	12.7 - 50.8 mm	400 x 350 mm	1200 kg
GEPL - BM - 100	21.3 - 114.3 mm	600 x 520 mm	2000 kg
GEPL - BM - 200	88.9 - 219.3 mm	660 x 572 mm	3000 kg

Gallium Equipment Pvt Ltd.

Reach us: +91-9910602173
sales@galliumholdings.com
www.galliumholdings.com

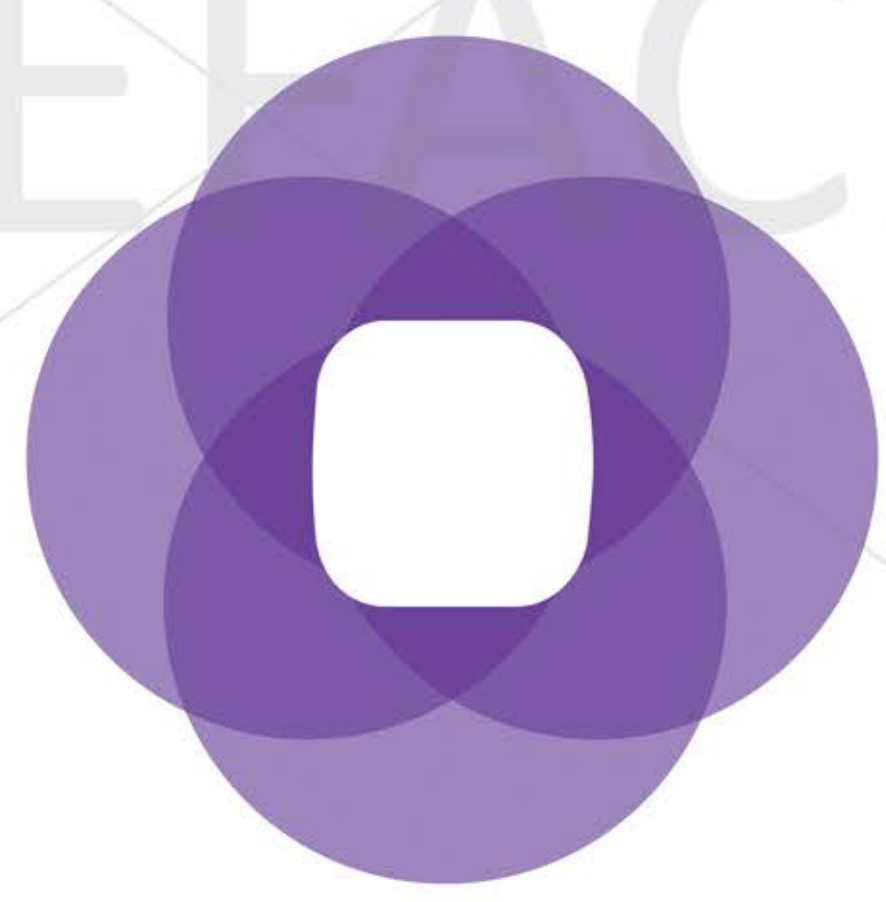

GALLIUM



SLITTING LINES & CUT TO LENGTH LINES

Gallium specializes in designing and manufacturing Slitting Lines & Cut To Length Lines for Steel Service Centers and Manufacturers who demand precision, reliability and maximum productivity.



SLITTING LINES


MODEL	Sheet Thickness	Coil Width	LineSpeed M/min	Coil Weight (MT)
GEPL - SL - 950	0.2-2.5	300-950	0-120	5, 10
GEPL - SL - 1550	0.5-4.5	300-1550	0-100	5, 10
GEPL - SL - 1800	1.2-8.0	900-1800	0-80	25,30,40
GEPL - SL - 2000	2.5-10.0	950-2000	0-60	25,30,40
GEPL - SL - 2200	2.5-16.0	950-2200	0-40	25,30,40

CUT TO LENGTH LINES

MODEL	Sheet Thickness	Coil Width	LineSpeed M/min	Coil Weight (MT)
GEPL - CTL - 850	0.3-3.0	300-850	40	5, 10
GEPL - CTL - 1300	1.2-4.5	400-1300	40	10, 15
GEPL - CTL - 1600	1.2-6.0	400-1600	40	15, 20
GEPL - CTL - 1650	1.5-8.0	400-1650	40	25,30,40
GEPL - CTL - 1800	2.0-10.0	650-1600	40	25,30,40
GEPL - CTL - 2000	3.0-16.0	900-2000	40	25,30,40

Gallium Equipment Pvt Ltd.

Reach us: +91-9910602173
sales@galliumholdings.com
www.galliumholdings.com

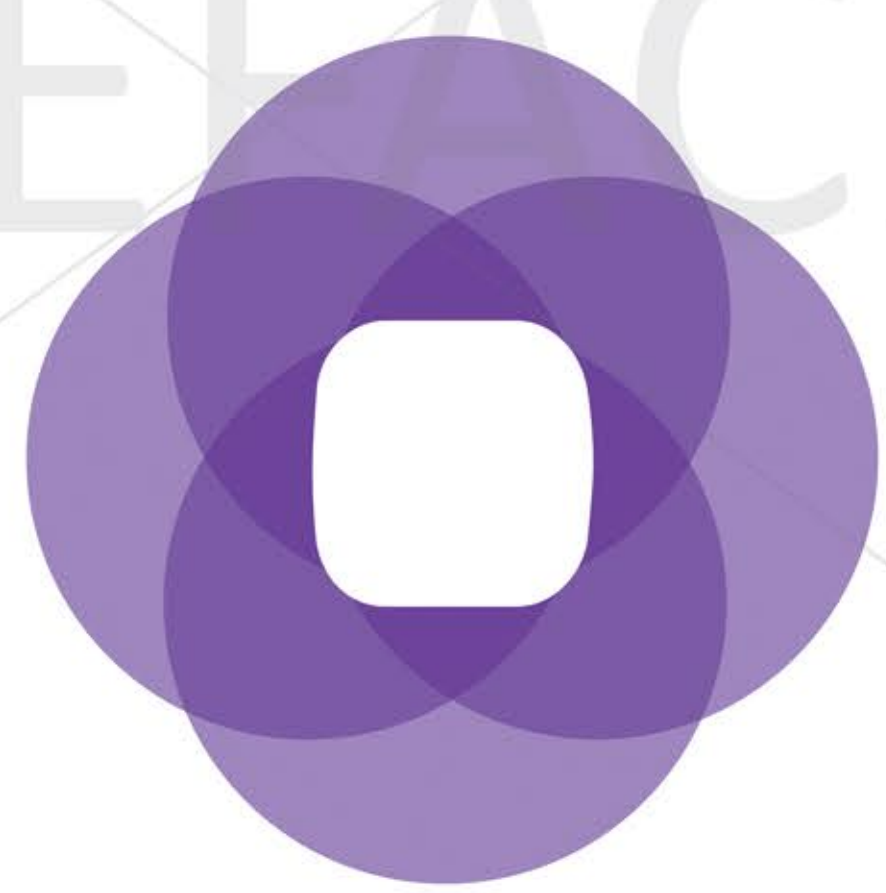

GALLIUM



TUBE DRAWBENCH

Single/Double/Triple Tube Drawbench with automatic operation, designed for high yield, perfect quality and precise application.



Features


- Automatic Tube handling and feeding mechanism
- Motorized rotating/indexing type backbench with auto plug positioning device to minimize handling time
- Spherical die holder for self-alignment Carriage driven by duplex/triplex type double sprocket and chain having strength up to 6 times the draw force
- Automatic tube discharge at front frame



MODEL	Maximum Force	Maximum Mother OD	Maximum Tube Length	Maximum Tube Length
GEPL-DB-10	10 MT	50 mm	18 MTR.	60m/min
GEPL-DB-30	30 MT	90 mm	25 MTR.	60m/min
GEPL-DB-50	50 MT	130 mm	25 MTR.	60m/min
GEPL-DB-75	75 MT	175 mm	25 MTR.	60m/min

Gallium Equipment Pvt Ltd.

Reach us: +91-9910602173
sales@galliumholdings.com
www.galliumholdings.com

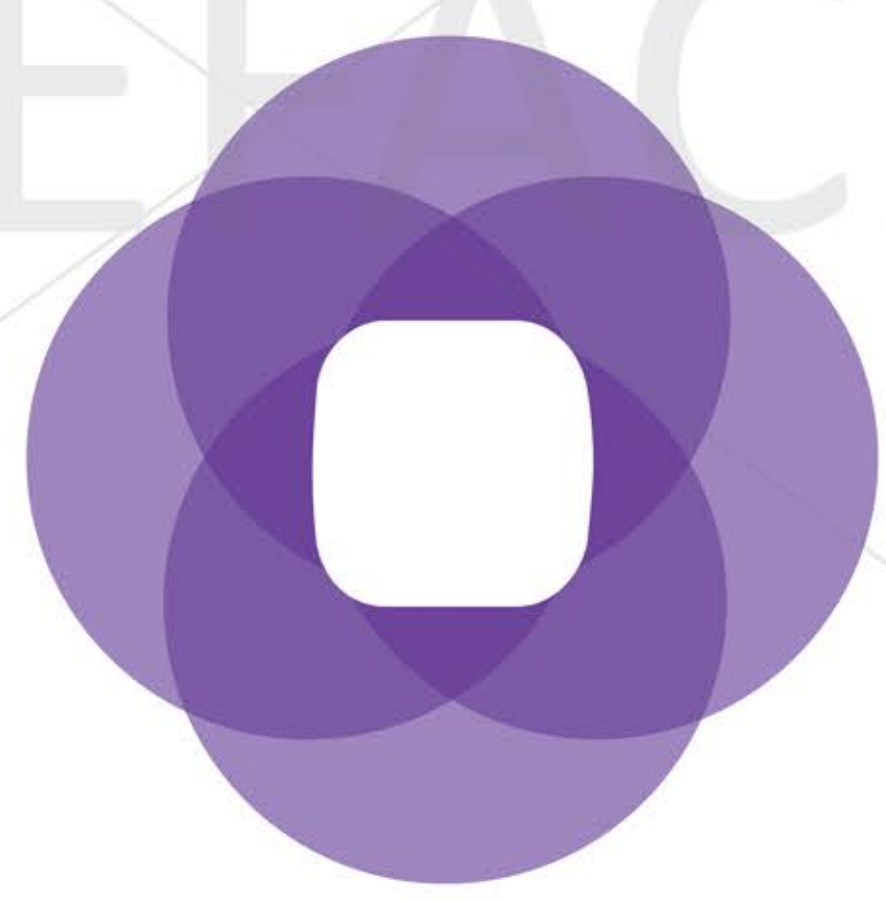

GALLIUM




THREADING MACHINE



- For external thread as per BS/ASTM Standards
- No. of Models
- ½" to ¼" N.B, 1.8 6.0 mm thickness, 12 tubes/min. maximum
- 3" – 8" N.B, 3.2 – 8.2 mm thickness, 4 Tubes/Min. Maximum
- Standard chasers, Fully Automatic, with option of colour Banding, Hexagonal Packing.

Gallium Equipment Pvt Ltd.

Reach us: +91-9910602173
sales@galliumholdings.com
www.galliumholdings.com

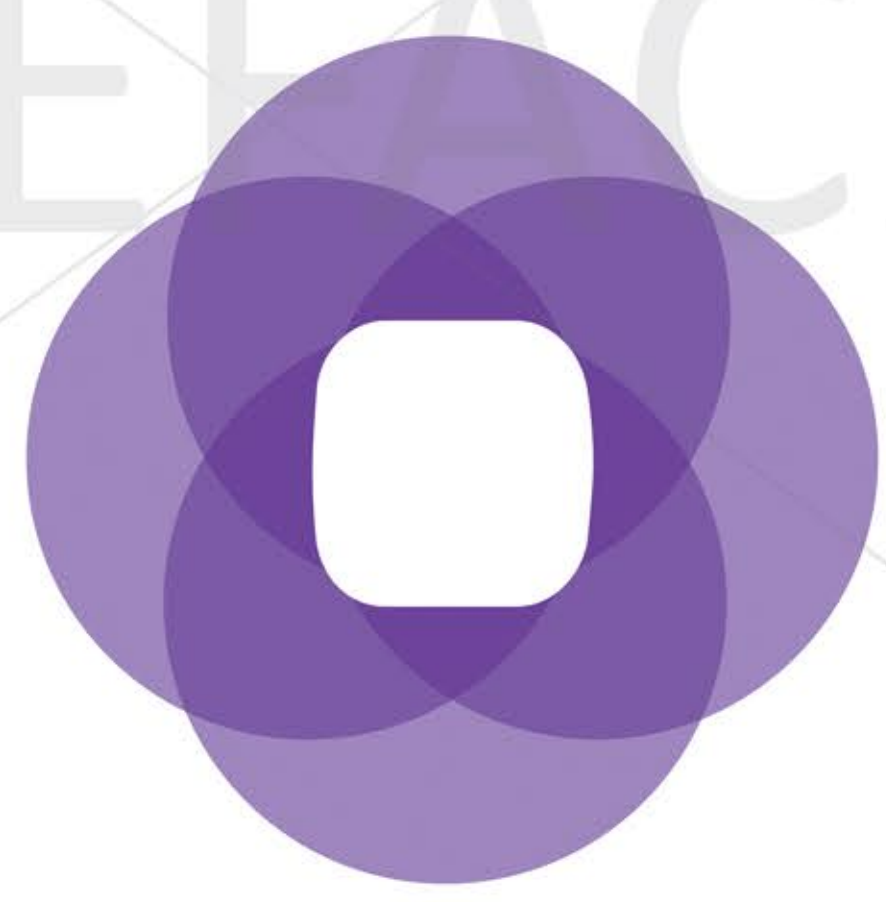

GALLIUM



COIL ENTRY LINE




Fully Automatic Entry Section
For Steel Strip Processing Lines
Like Tube Mills, Slitting Lines,
Cut To Length Lines, Roll
Forming Lines, Pickling Lines,
Galvanizing Lines Etc.

CAPACITIES

- WIDTH : 20 mm – 2200 mm
- THICKNESS : 0.25 – 25 mm
- COIL WEIGHT : 45000 Kg.

EQUIPMENT

- | | |
|--------------------|---|
| Coil Car | : Hanger type, Pit Mounted, Floor Mounted, |
| Coil Opener | : Top/Bottom Opening, with Breaker Rolls |
| Levellers | : Staggered 5 to 19 Roll design, with backup
Rolls also |
| Shear & welder | : TIG/MIG welding, Downcut/Roller Shears,
Automatic/Semi-Automatic |
| Strip Accumulators | : Horizontal Reverse Loop Type/Vertical
Reverse Loop Type |

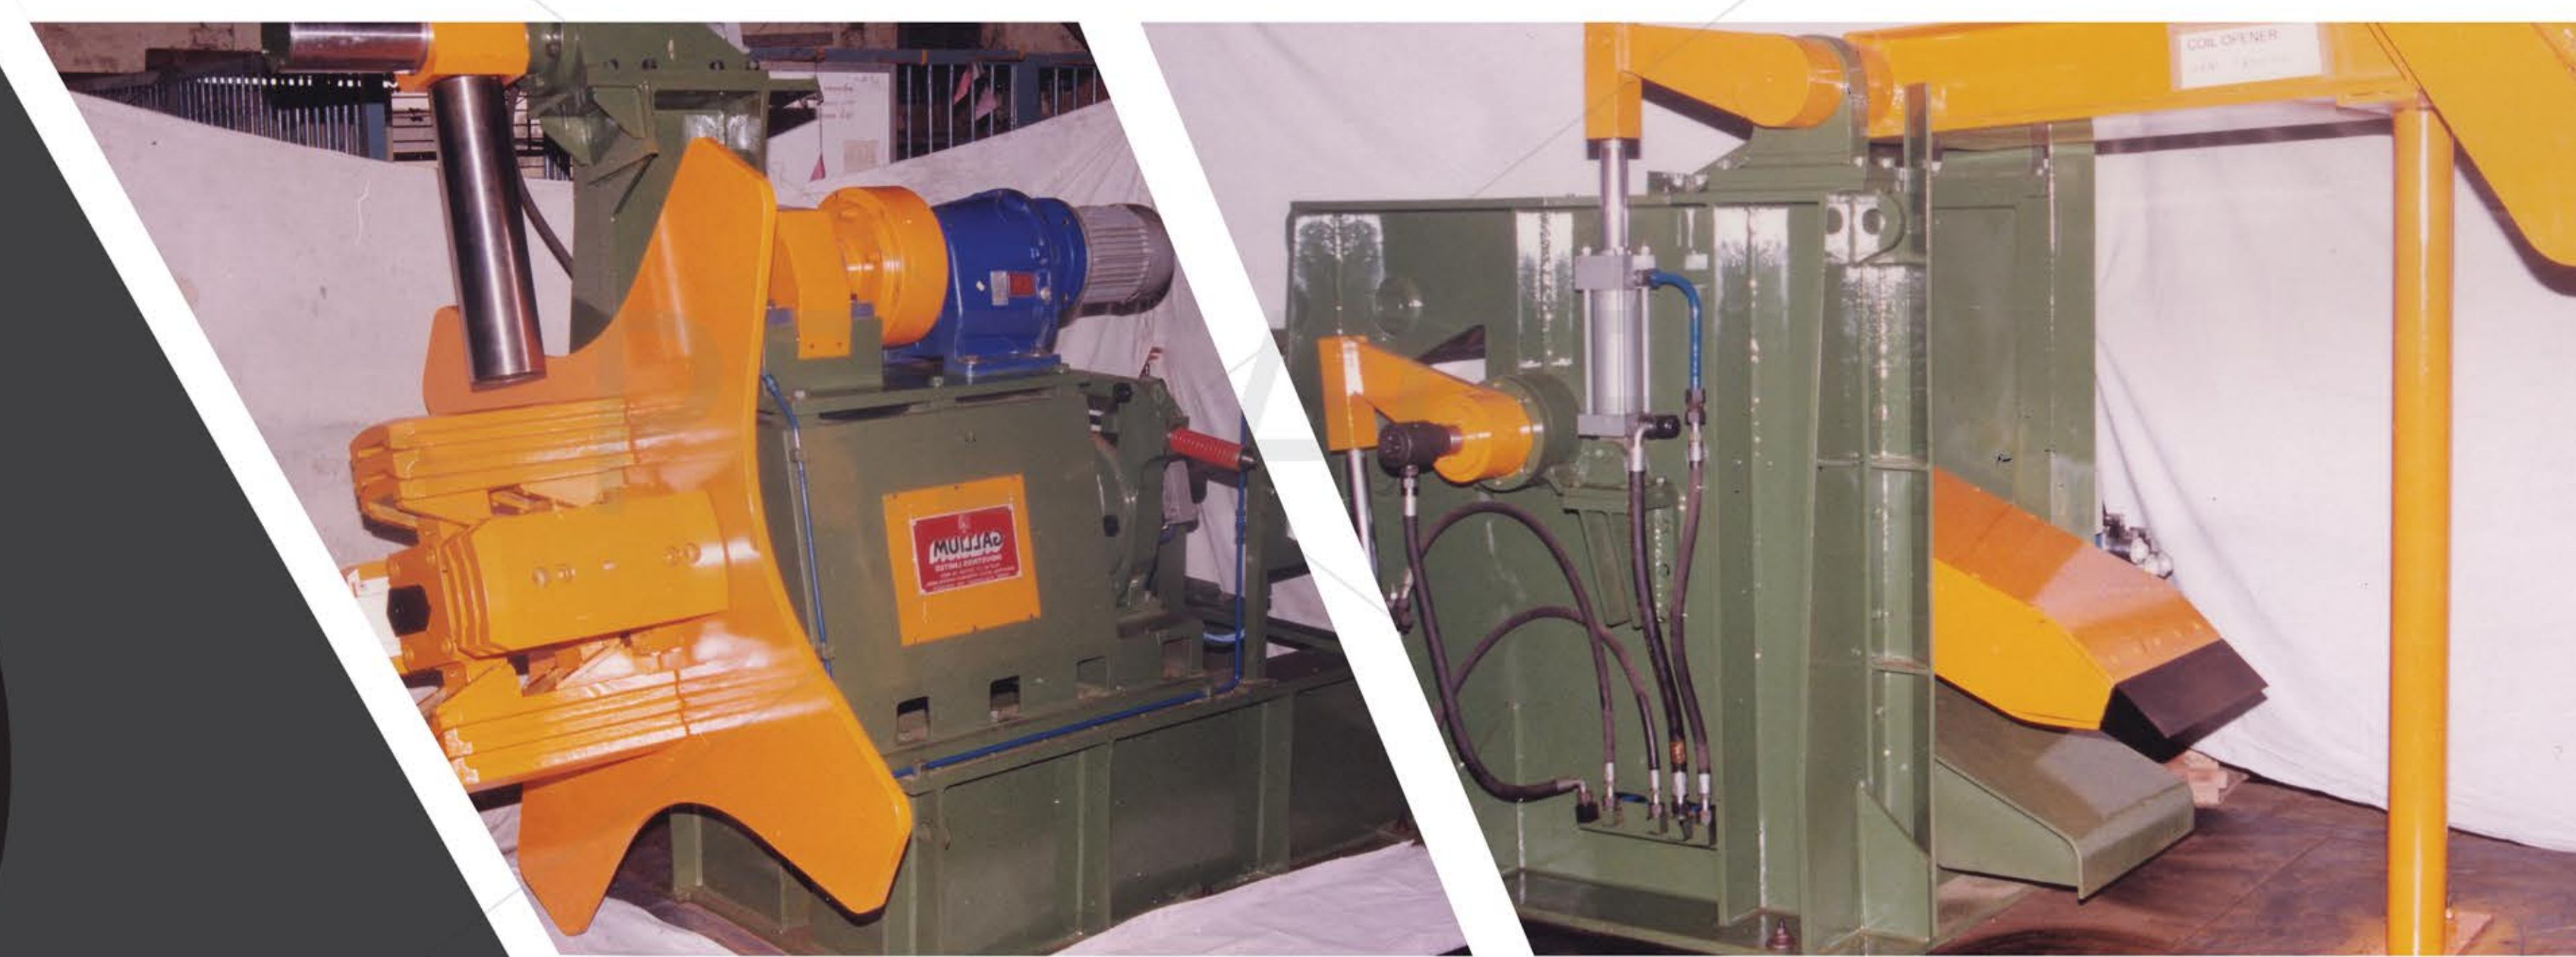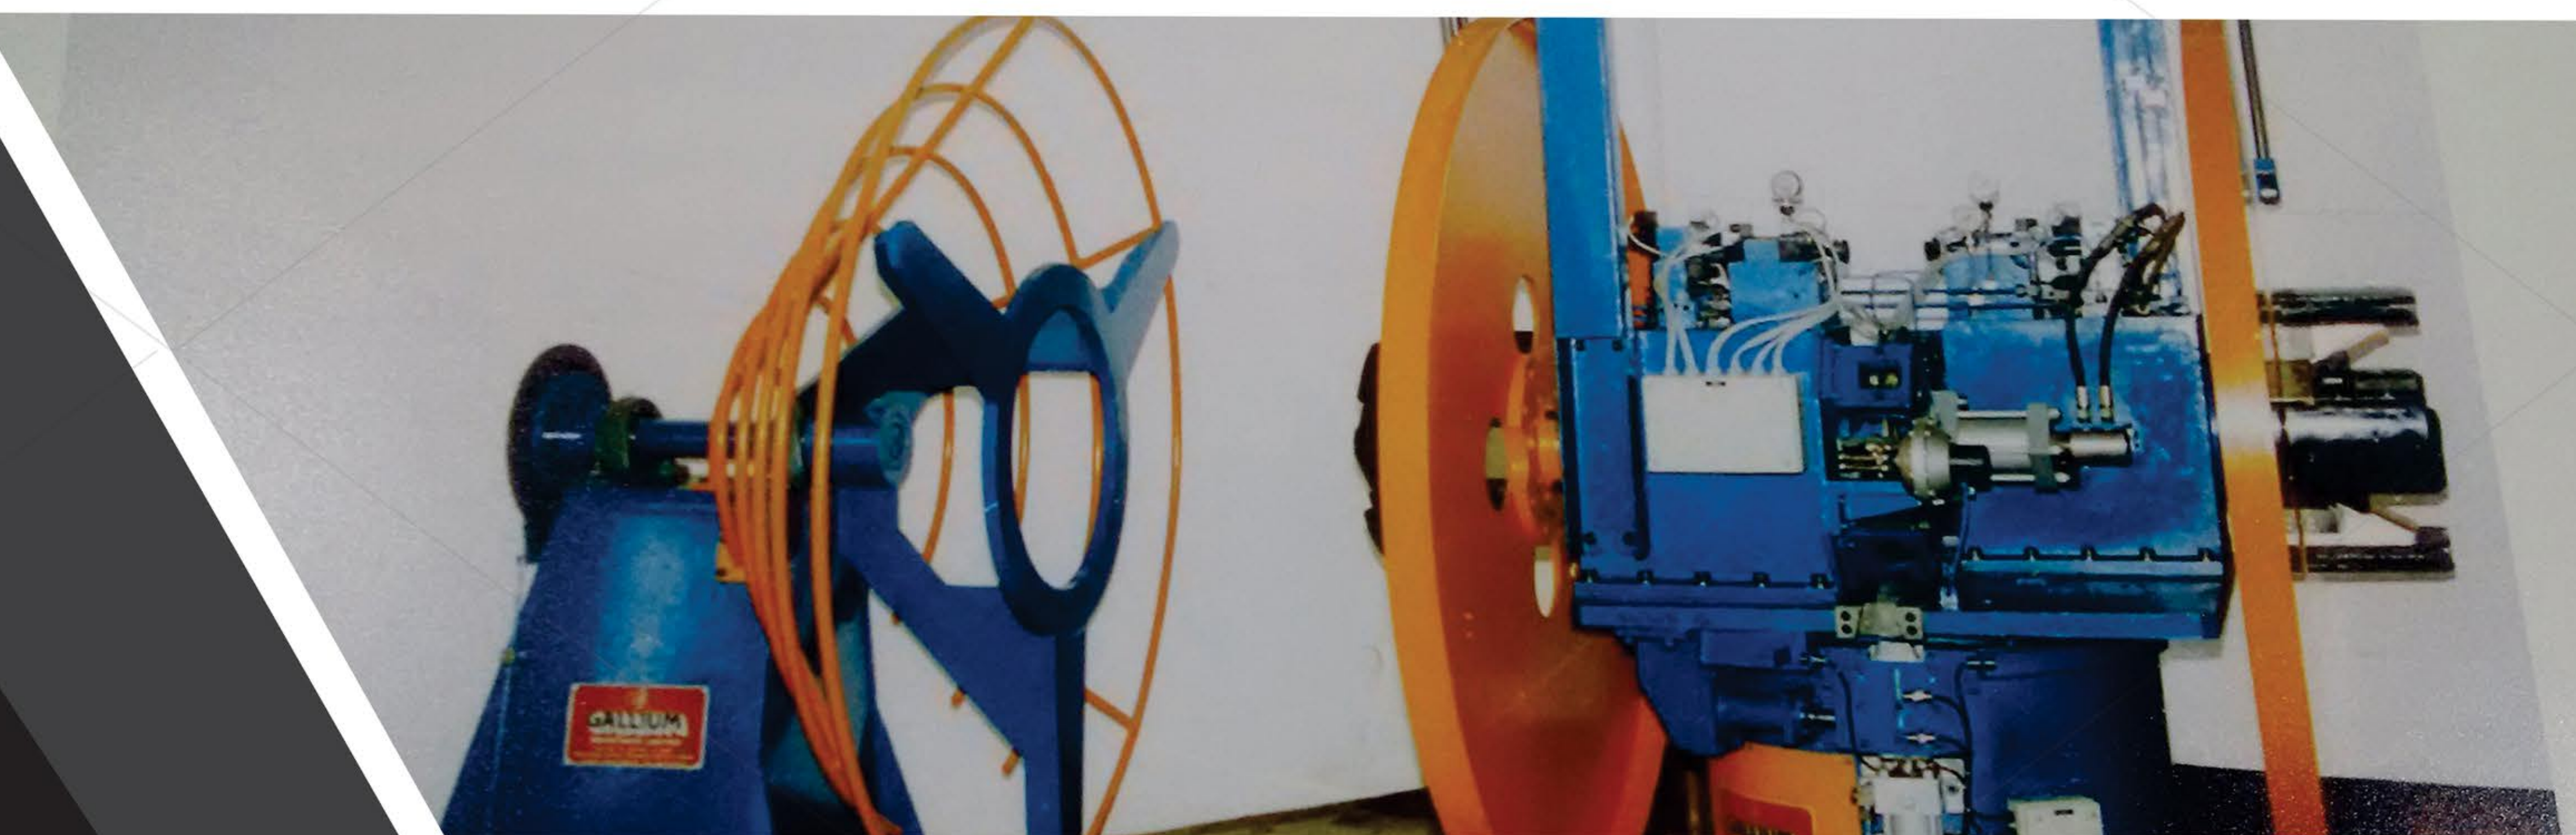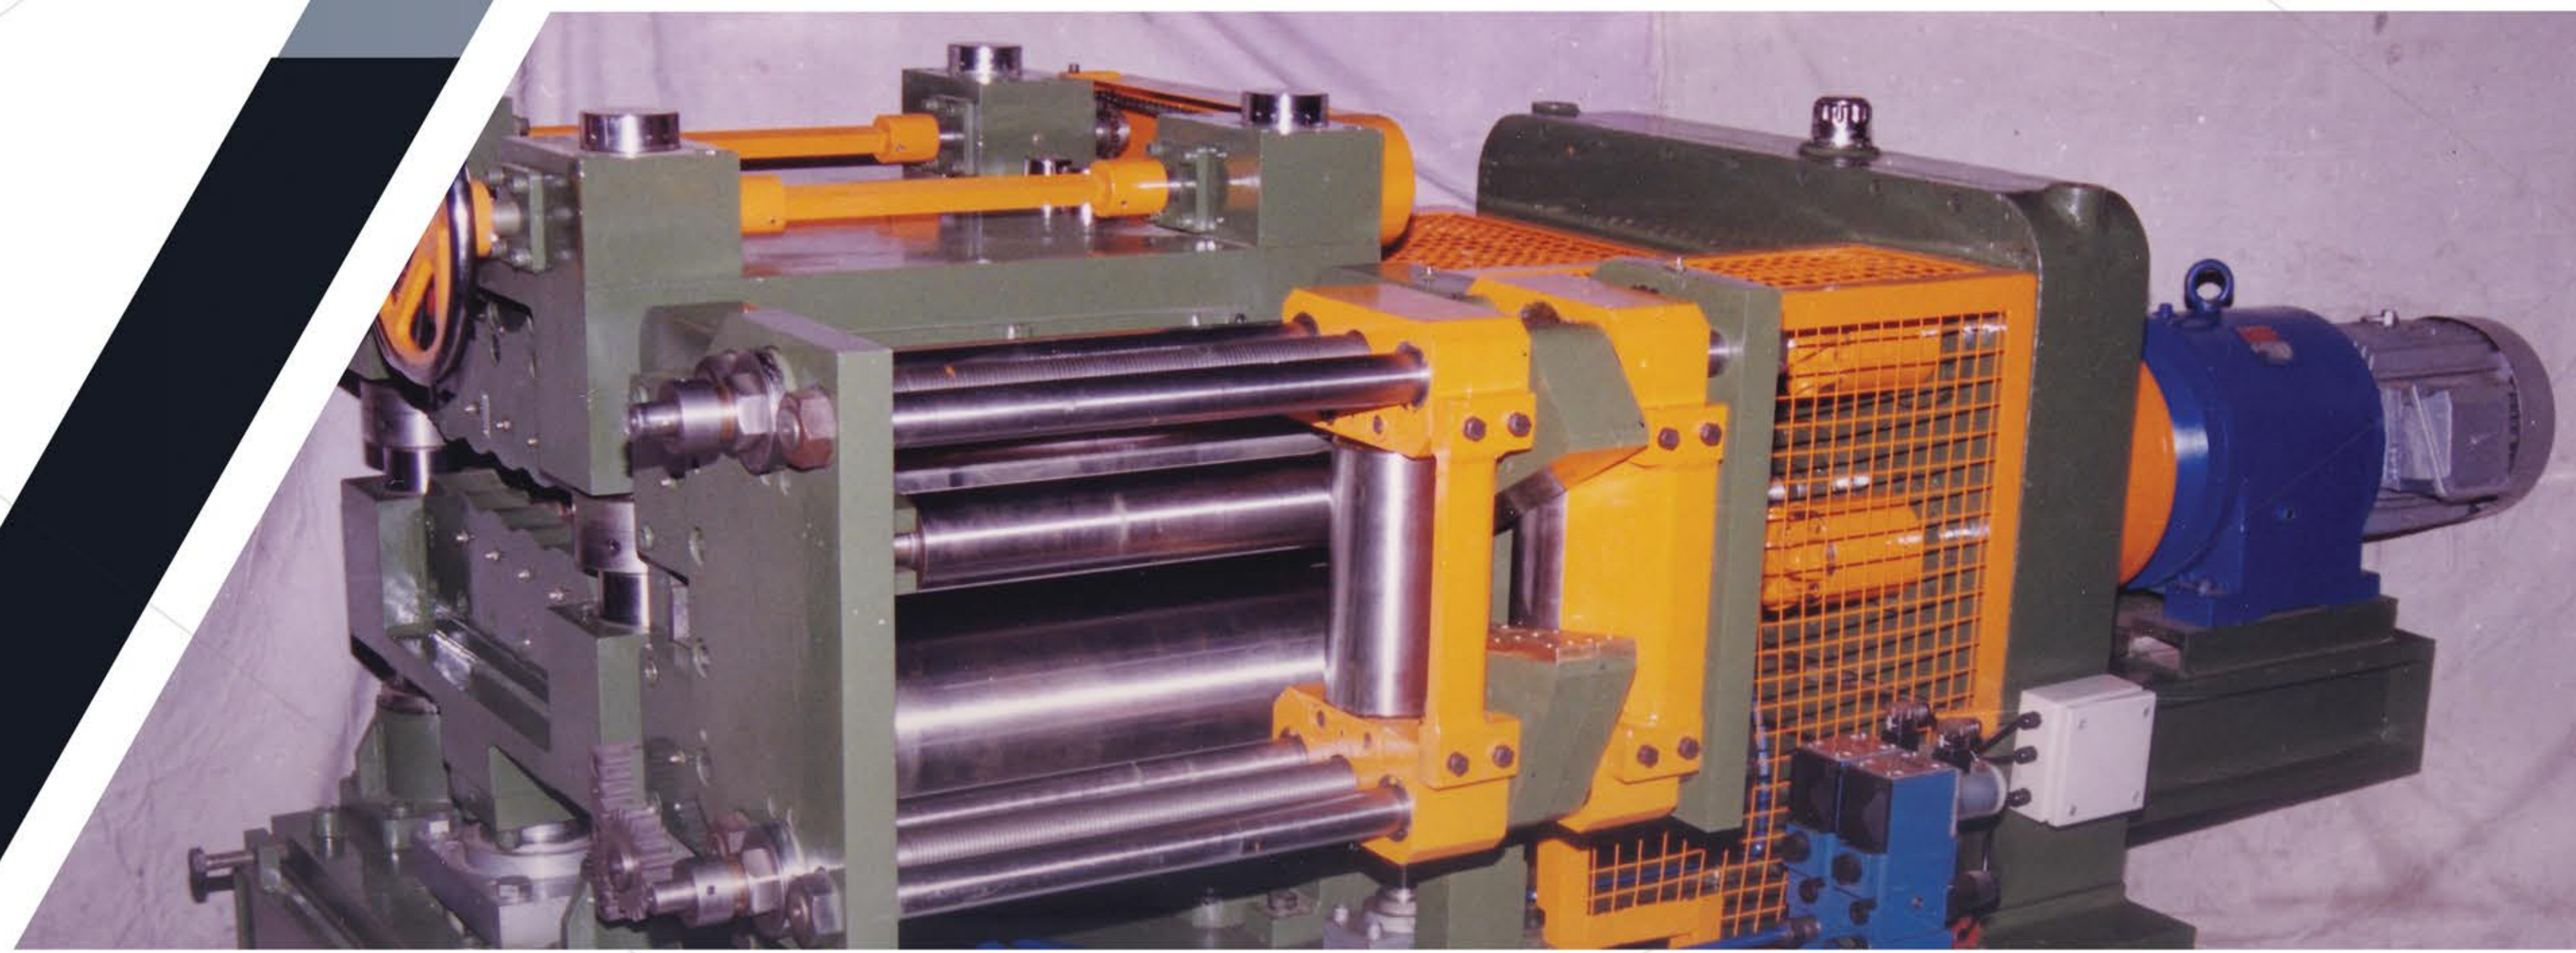

Gallium Equipment Pvt Ltd.

Reach us: +91-9910602173
sales@galliumholdings.com
www.galliumholdings.com