



ROLANSINI



(08) 6270 6374
sales@rolansini.com.au



APOLL PASSIVE WINDOW





ROLANSINI




(08) 6270 6374

sales@rolansini.com.au

INNOVATIVE DESIGN

Apollo have passed the PHI passive window certification, and are certified for the most difficult climate zone - the cold temperate climate, suitable for Nordic countries. Equipped with imported TECHNOFORM PA66GF25 insulation strips as standard, using ultra-wide 64mm insulation strips, and the insulation effect is 2-3 times higher than conventional ones.

- Profile thickness:2.0mm
- Frame Depth:110mm
- Frame Width:40.8mm
- Sash Width:79mm
- Glass Standard: 6G Low-e+16A+6G Low-e+16A+5G+16A+5G, warm edge spacer
- Hardware:SOBINCO
-

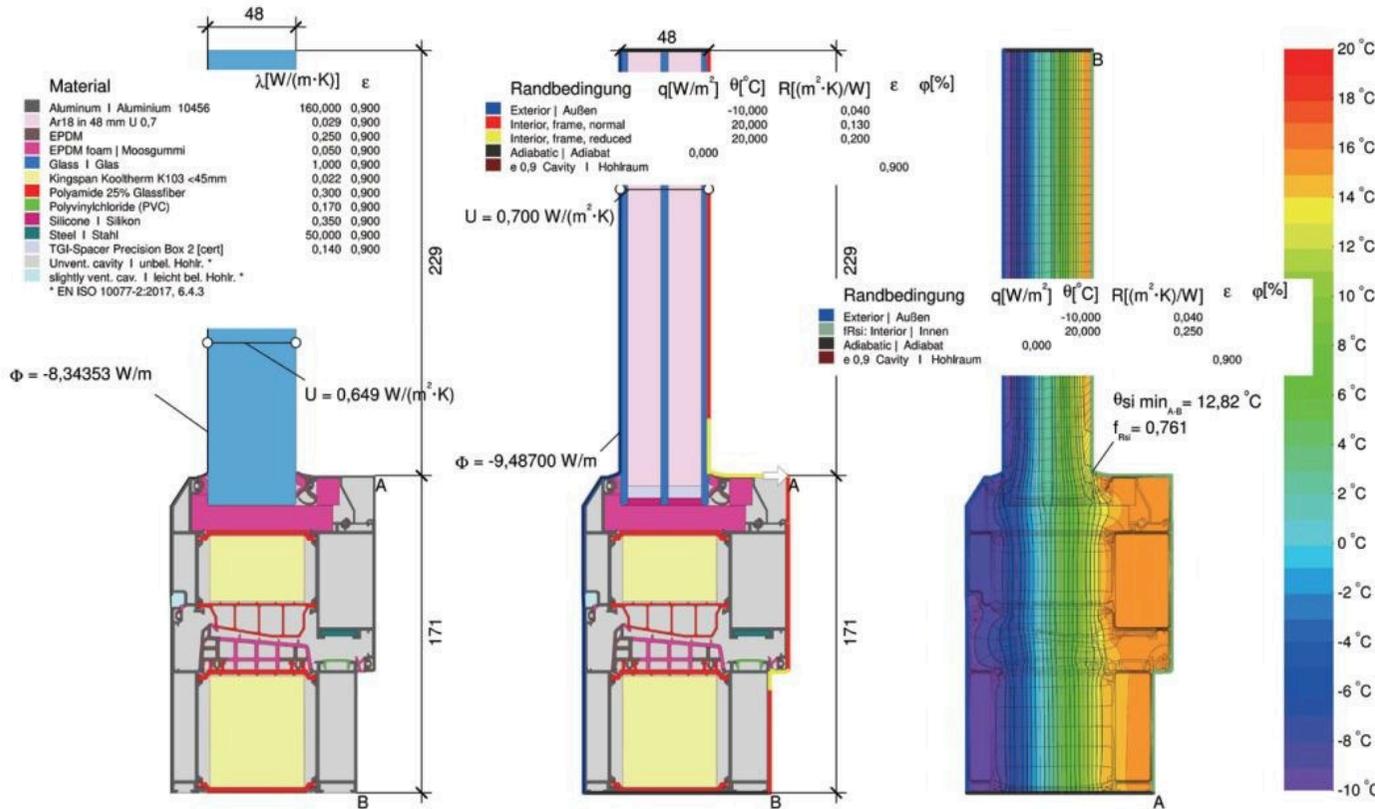

PERFORMANCE

Thermal Insulation
0.78W/m²K

Wind Resistant
P3≥5.0kPa

Sound Insulation(Rw)
42dB

Air tightness
LEVEL 8

Water Tightness
500≤ΔP<700pa

*Note:Performance based on glazing and size,the above conditions are laboratory theoretical data