







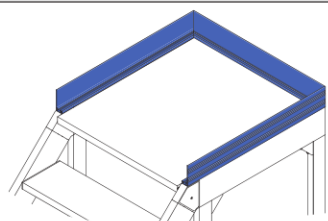




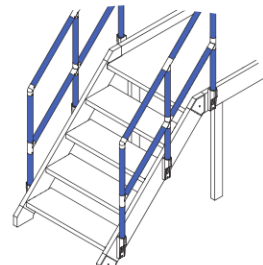


Selection Reference of Standard Unit

Tube and Extruded aluminum profile as per GB5237-2008, surface satin anodized.
 Standard length of delivery profiles are: 6000mm for delivery inside China, 5800mm for international shipment.

<p>Aluminum Tube $\Phi 40 \times 3$</p> 	<p>To build the guardrail, $\Phi 40$mm. The design of closed frame effectively avoid the damage to the fingers.</p>	
<p>Aluminum tube $\Phi 40$ 1 slot profile</p>  <p>Aluminum tube $\Phi 40$ 2 slot profile</p> 	<p>Aluminum tubes are used to form protective guard, with a diameter of $\Phi 40$mm, with single side and double side slot, protective plates can be installed using the slot to prevent falling objects.</p>	
<p>Step Protection Profile</p> 	<p>To be used in the inner front side of the step ladder to increase the safety level.</p>	
<p>Footrail Profile</p> 	<p>To avoid the object falling from the platform.</p>	
<p>Step Profile</p> 	<p>To build the step ladder and working platform and be fixed by clamp to form the platform in any dimensions.</p>	

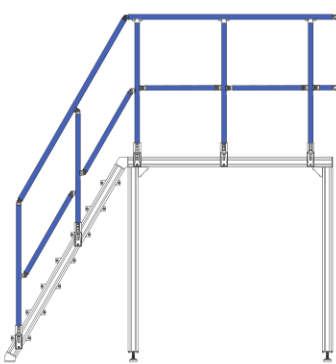

<p>Strut Profile PG40</p> 	<p>To build the frame support of step and working platform.</p>	
---	---	---


<p>Machining Symbol</p>		<p>Drilling</p>		<p>Angle cutting</p>		<p>Thread tapping</p>
-------------------------	---	-----------------	---	----------------------	---	-----------------------

Modular Assembly System
 MAS



Machine Guard System
 MGS

Stair and Platform System
 SPS

Tubular Framing System
 TFS


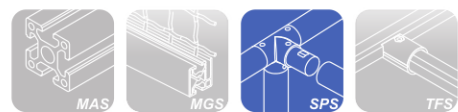


Aluminum Tube $\Phi 40 \times 3$

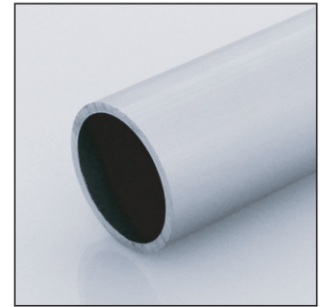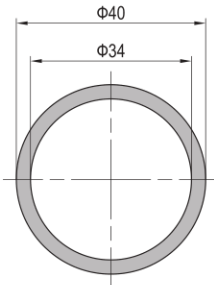


Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (kg/m)	Part No.
Aluminum Tube $\Phi 40 \times 3$	6.0	6.0	3.0	3.0	1.0	SPS.AT40.03

Aluminum tube $\Phi 40$ 1 slot profile

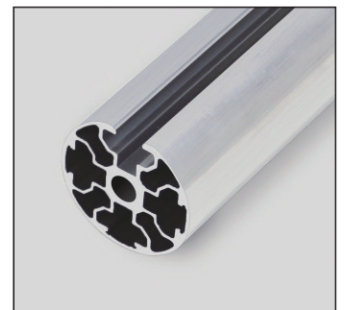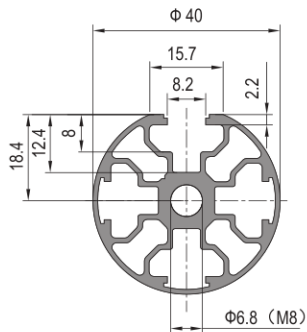



Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (kg/m)	Part No.
Aluminum tube $\Phi 40$ 1 slot profile	3.94	4.42	2.04	2.21	1.06	SPS.AT40.1.08

Aluminum tube $\Phi 40$ 2 slot profile

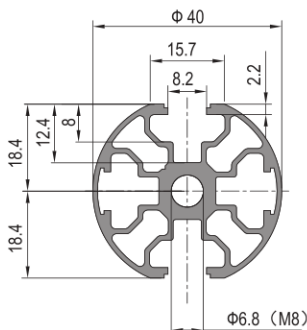

Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (kg/m)	Part No.
Aluminum tube $\Phi 40$ 2 slot profile	3.48	4.40	1.89	2.20	1.02	SPS.AT40.2.08

Step Protection Profile

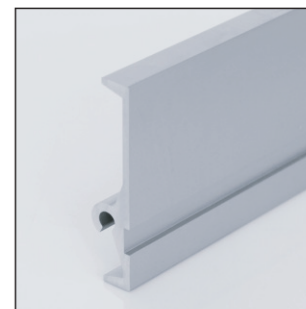
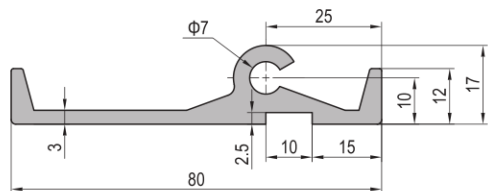


Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (kg/m)	Part No.
Step Protection Profile	0.7	24.5	1.2	6.1	1.2	SPS.SS40.80

Modular Assembly System

MAS

Footrail Profile 40x120

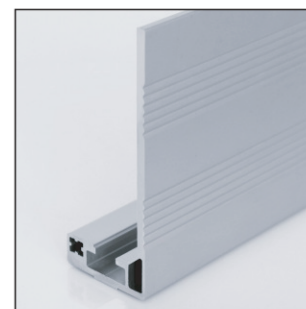
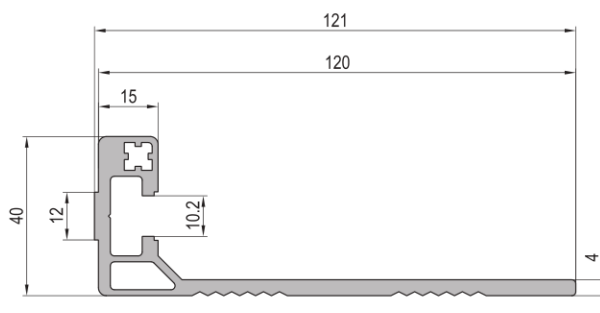


Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (kg/m)	Part No.
Footrail Profile 40x120	6.9	122.4	3.5	20.4	1.85	SPS.SS40.120

Machine Guard System

MGS

Step Profile 40x100

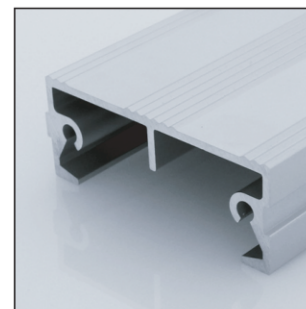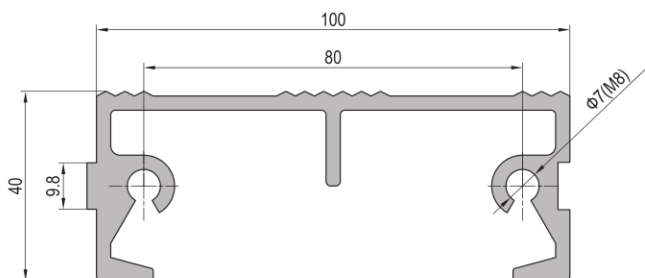



Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (kg/m)	Part No.
Step Profile 40x100	13.2	128.6	6.6	25.7	2.4	SPS.SP40.100

Stair and Platform System

SPS



Tubular Framing System

TFS







Step Profile 40x150

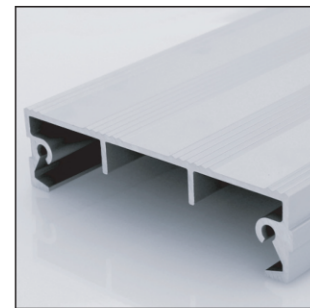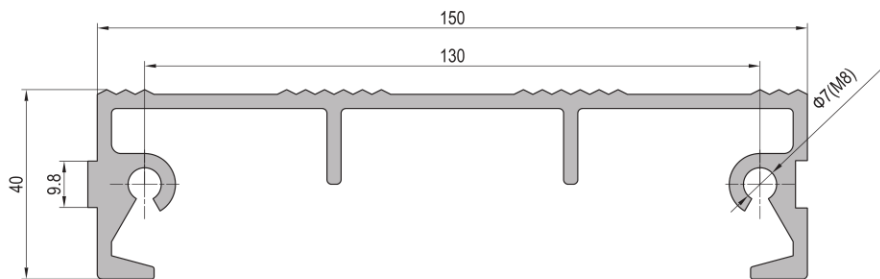



Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (kg/m)	Part No.
Step Profile 40x150	15.4	342	7.7	45.6	2.9	SPS.SP40.150

Step Profile 40x250

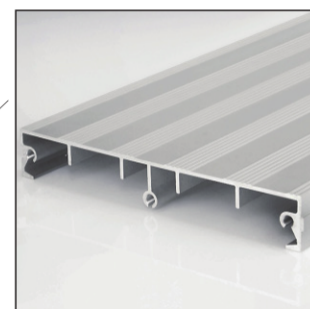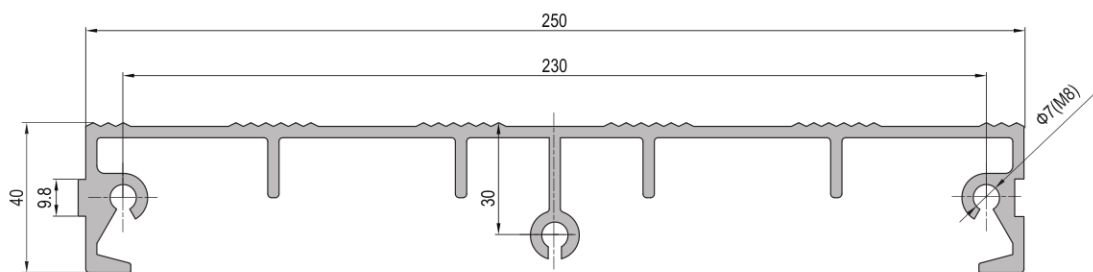

Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (kg/m)	Part No.
Step Profile 40x250	21.5	1201	10.7	96	4.5	SPS.SP40.250



Strut Profile PG40 40x120 8 slots

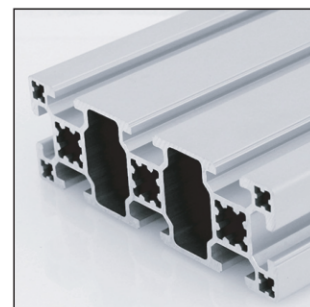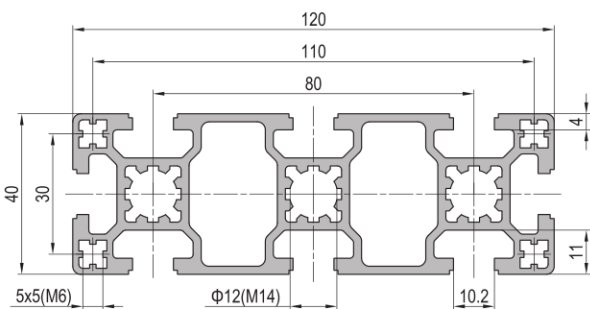

Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (kg/m)	Part No.
Strut Profile PG40x120 8 slots	24.1	194.8	12.1	32.5	3.8	1.11.40.040120.08



Strut Profile PG40 40x160 10 slots

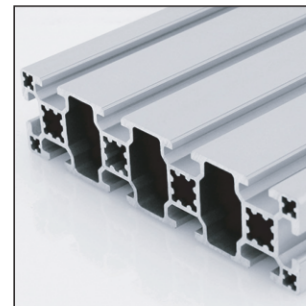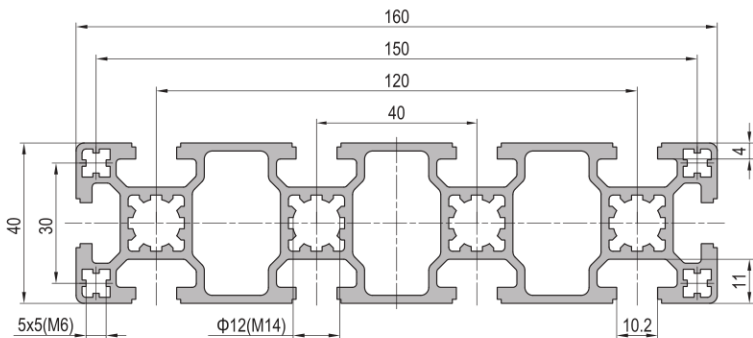

Description	Moment of Inertia $I_x(\text{cm}^4)$	Moment of Inertia $I_y(\text{cm}^4)$	Moment of Resistance $W_x(\text{cm}^3)$	Moment of Resistance $W_y(\text{cm}^3)$	Mass (kg/m)	Part No.
Strut Profile PG40x160 10 slots	31.6	435.7	15.8	54.5	4.8	1.11.40.040160.10

Modular Assembly System
 MAS

Machine Guard System
 MGS

Stair and Platform System
 SPS

Tubular Framing System
 TFS

