


SEGA™ SERVICE MANUAL

SEGA SATURN (PAL)

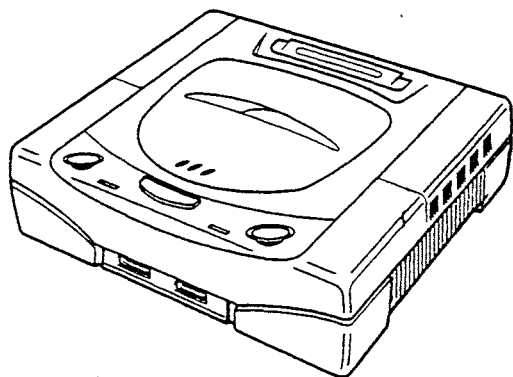

| | |
|--------|------------|
| NO. | 013 - 1 |
| ISSUED | JUNE, 1995 |

CONTENTS

| | |
|--|----|
| 1. SPECIFICATIONS | 3 |
| 2. IDENTIFYING PARTS | 4 |
| 3. ACCESSORIES | 5 |
| 4. IDENTIFICATIONS AND LOCATIONS OF CIRCUIT BOARDS | 5 |
| 5. DISASSEMBLY PROCEDURE | 6 |
| 6. CD DRIVE MAINTENANCE AND ADJUSTMENT | 8 |
| 7. BLOCK DIAGRAM | 11 |
| 8. SCHEMATIC DIAGRAMS | 13 |
| 9. CIRCUIT BOARD DIAGRAMS | 27 |
| 10. PARTS SPECIFICATIONS | 32 |
| 11. EXPLODED VIEW & PARTS LIST | 70 |
| 11-1. Exploded View | 70 |
| 11-2. Mechanical Parts List | 71 |
| 11-3. Electrical Parts List | 72 |
| 11-4. Accessories/Package list | 77 |

Sega Enterprises, Ltd.

PROTECTION OF EYES FROM LASER BEAM DURING SERVICING

This set employs laser. Therefore, be sure to follow carefully the instructions below when servicing.

Warning

When servicing, do not approach the laser exit with the eye too closely. In case it is necessary to confirm laser beam emission. Be sure to observe from a distance of more than 30 cm from the surface of the objective lens on the optical pick-up block.



Caution: Invisible laser radiation when open and interlocks defeated avoid exposure to beam.

Caution

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

This console is classified as a CLASS 1 LASER product.

SAFETY PRECAUTIONS

Notice: Comply with all cautions and safety related notes located on or inside the cabinet and on the chassis.

1. When replacing a chassis in the console, all the protective devices must be put back in place, such as barriers, non-metallic knobs, adjustment and compartment covers/shields, isolation resistors/capacitors, etc.
2. When service is required, observe the original lead-dress. Extra precautions should be taken to assure correct lead dress in the high voltage circuit.
3. Always use the manufacturer's replacement components. Especially critical components as indicated on the circuit diagram should not be replaced by other manufacturer's. Furthermore, where a short-circuit has occurred, replace those components that indicate evidence of overheating.

PRODUCT SAFETY NOTICE

Many electrical and mechanical parts have special safety-related characteristics. These are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this Service Manual. Electrical components having such features are identified by marking with a \triangle in the parts list in this Service Manual. The use of a substitute replacement component which does not have the same safety characteristics as the SEGA recommended replacement one, shown in the parts list in this Service Manual, may create shock, fire, or other hazards. Product Safety is continuously under review and new instructions are issued from time to time.

CAUTION ON FUSE REPLACEMENT

Caution: For continued protection against risk of fire, replace only with same type, amperage, volt fuse.

Attention: Afin d'assurer une protection permanente contre tout risque d'amorçage électrique, remplacer uniquement par un fusible de meme type et de amperes volts.



This symbol indicates a Fast Operating Type Fuse.



This symbol indicates a Time Lag Type Fuse.

SATURN **COMPATABILITY**

Audio CD:

The normal audio Compact Disc is playable on the Saturn machine, and can be altered with all the effects of a modern Hi-fi and more. Surround sound, vocal cut-out for Karaoke, program sequence of tracks and shuffle to name but a few. You need no extra equipment to play music CDs on your Saturn.

CD+G:

CD and Graphics are a format where simple visuals can appear on the screen that relate to the music. These visuals might include stills of the band, or other pictures. You need to buy no extra equipment to use CD+G on your Saturn.

CD+EG:

CD and extended graphics is a new medium ready to be utilised by the music community. It is basically an enhanced version of what is described above in CD+G. You need no extra equipment to use CD+EG on your Saturn.

MPEG:

MPEG is the standard industry format for compressing Full Motion Video footage. This means that the footage takes up less disk space, and when it is to be viewed, the MPEG program decodes the footage and plays it on screen. The MPEG add-on is needed in order to use the MPEG video CDs and Philips CDi. At the current rate of compression one movie can fit on two CDs.

CDi:

Developed by Philips, CDi is an interactive CD format that can be used in a variety of educational and entertainment purposes. Using video footage and CD quality sound CDi has become an industry leader in the field of interactive fun. The MPEG add-on is required to access the full range of CDi software

Kodak Photo CD:

Photos stored on CD have theoretically infinite life, are always picture perfect and will never fade or be otherwise damaged. The Saturn can access Kodak Photo CDs with the use of another Saturn CD which allows the user to see display the photos in various ways. There are many Kodak Photo CD stores open in the major cities.

Frame Buffering: A technique to maximise graphic display performance by letting the graphics processor chip “set aside” images it has already calculated, allowing it to work on generating the next fraction of a seconds visual images, all while the screen is still busy painting the last fraction of a second’s display.

Playfields: The background(s), anything that is on screen that it not a sprite. When two playfields (layers of bacground) are contolled properly, parrallax scrolling can result. The Sega Saturn has a whole chip dedicated to controlling backgrounds (the VDP2 or Video Display Processor 2”) that can generate 5 distict layers of background at the same time.

Polygons/Second: (1000’s of) The number of polygons of a given size that can be drawn on the screen in one second. This figure does not include the size of the polygons, nor their texturing, shading, or lighting.

Realtime: An important adjective that usually indicates the game display is being re-calculated every second, taking into account the full effects of the player’s actions. When reffering to a game’s response or speed, it means the game responds instantly to the player’s commands.

Render: Drawing 3D graphical objects on a computer or game machine. “BUG” and “Clockwork Knight” are filled with beautifully rendered characters.

Texture Mapping: Copying a bit-map onto the faces of selected polygons to give the illusion of surface texture. “Daytona USA” is a great example of a texture mapped game.

Wireframe: A connect the dots approach to showing graphical objects by drawing lines between sets of points that make up a geometric outline.

Dynamic Perspective: Constantly changing the point of view (“camera angle”) so that the players feel that they are weaving in and around the on-screen action. Typically requires strong scaling and rotational capabilities. This can be seen on Sega Sports games on Saturn.

1. SPECIFICATIONS

Ratings

| | |
|-----------------------|---|
| Model | MK - 80200-50 |
| Power supply | AC220-240 V 50/60 Hz |
| Power consumption | Approx. 20 W |
| Operating environment | Temperature 5 °C to 35 °C Humidity 10% to 80% RH (no condensation) |
| Dimensions | 260 mm(W) × 230 mm(L) × 83 mm(H) (10.2 inches) × (9.0 inches) × (3.2 inches) |


Specifications

| | | | |
|-------------------------|-----------------------------------|--|--|
| CPU | Master | 32bit RISC SH2 (28.4 MHz, 25MIPS) | |
| | Slave | 32bit RISC SH2 (28.4 MHz, 25MIPS) | |
| | Sound | 68EC000 (11.3 MHz) | |
| Memories | Work RAM | 16 Mbit | |
| | Video RAM | 12 Mbit | |
| | Sound RAM | 4 Mbit | |
| | CD Buffer RAM | 4 Mbit | |
| | IPL ROM | 4 Mbit | |
| | Backup RAM | 256 Kbit | |
| Graphics | Resolution | 320 × 224 dot etc. | |
| | Colors | 1024/2048 (16,770,000 simultaneous transmission) | |
| | Sprite | Enlargement, Reducation, Rotation, Transformation | |
| Scroll | 5 screen maximum | | |
| | XY Scroll | 4 | |
| | Rotation | 2 | |
| | Enlargement / reduction | 2 | |
| | Window | 2 | |
| | Special features | Vertical cell scroll | |
| | | Lateral line scroll | |
| Enlargement / reduction | | | |
| CG Functions | Polygons | Specialized hardware | |
| | Special features | Wire frame | |
| | | Flat shading | |
| | | Gouraud shading | |
| Sound | PCM & FM sound source | 32 channels 16 bit sampling Sampling rate 44.1 kHz max. Audio DSP | |
| CD-ROM | Intelligent double-speed CD drive | | |


[Note] Characteristics and specifications may be changed without notice.

2. IDENTIFYING PARTS


2-1. Front View of Console

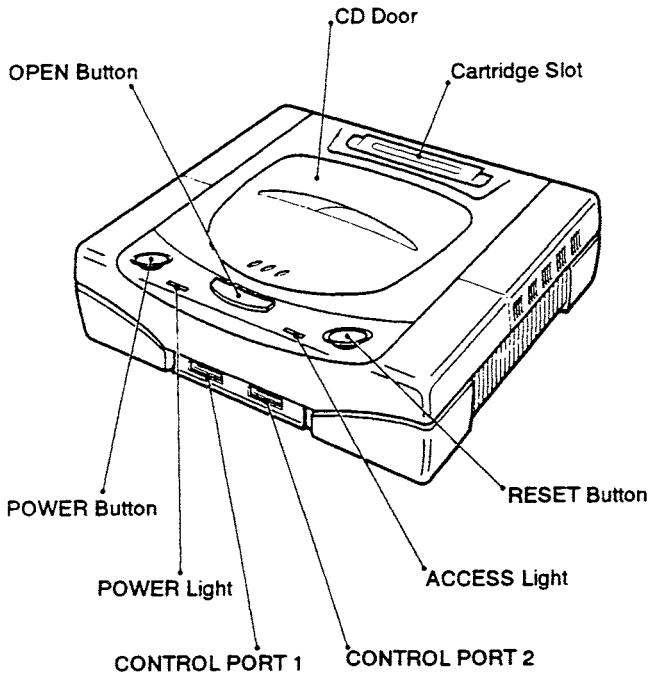


2-3. Control pad

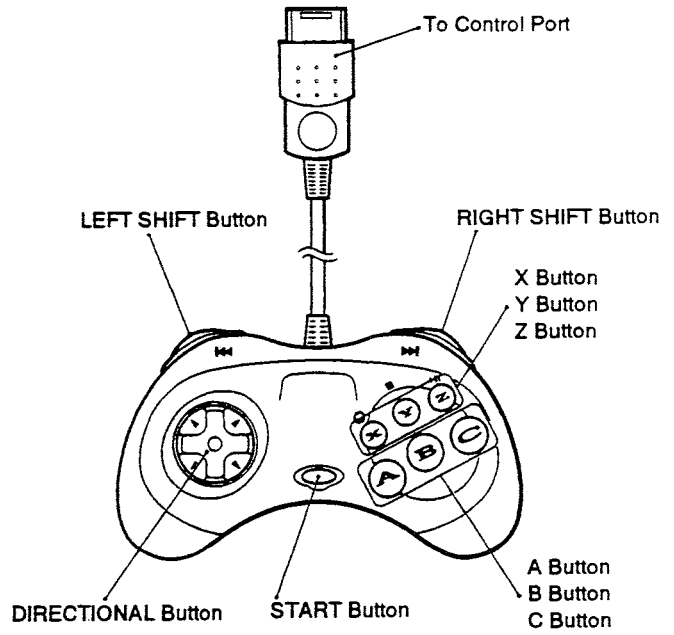

2-2. Back View of Console

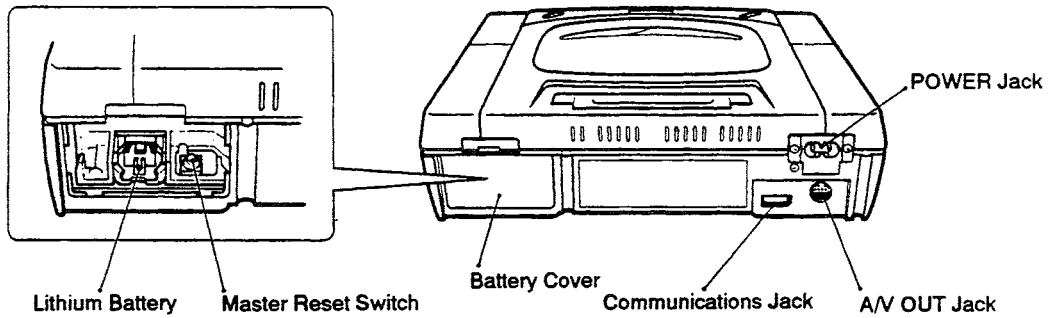

3. ACCESSORIES

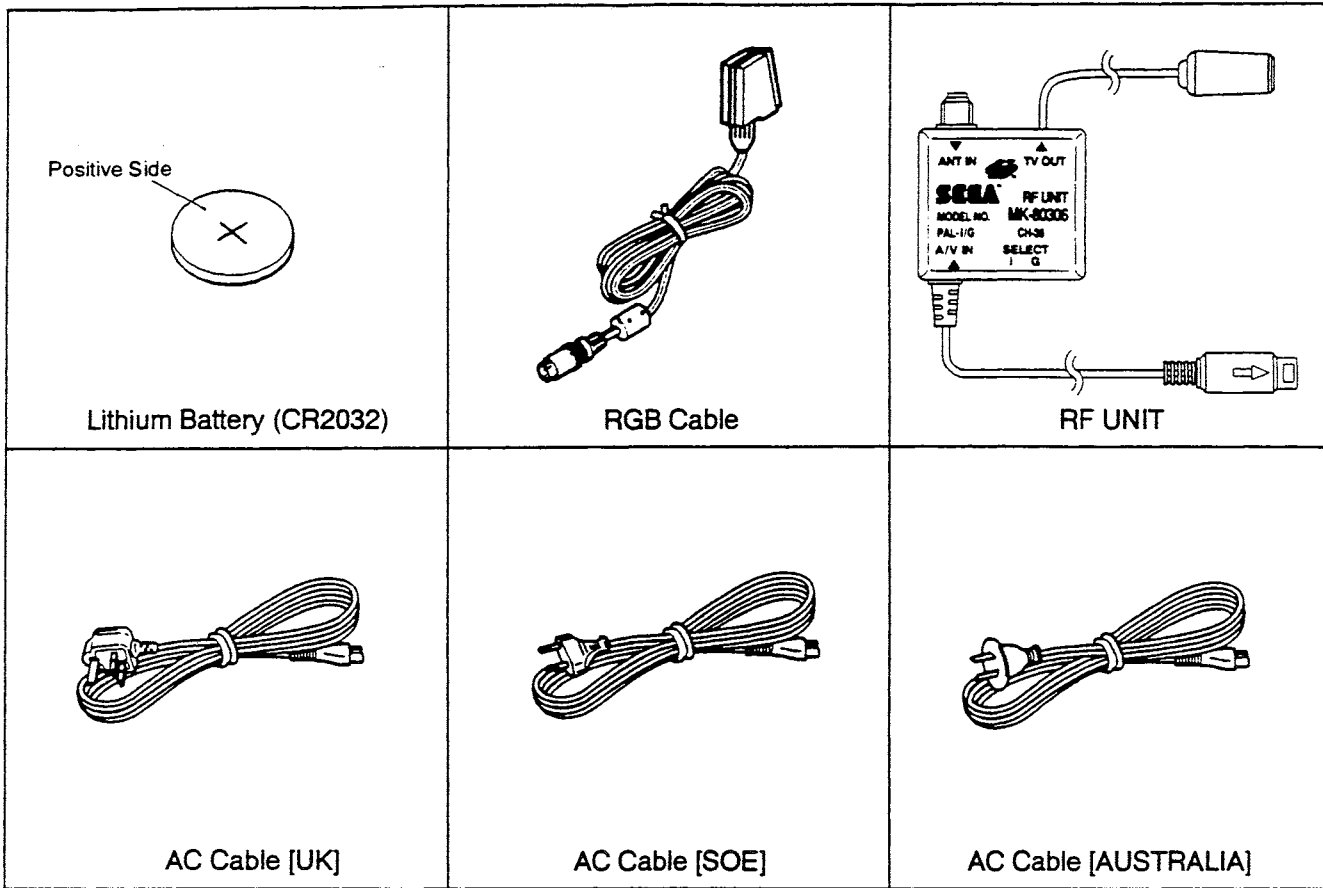

4. IDENTIFICATIONS AND LOCATIONS OF CIRCUIT BOARDS

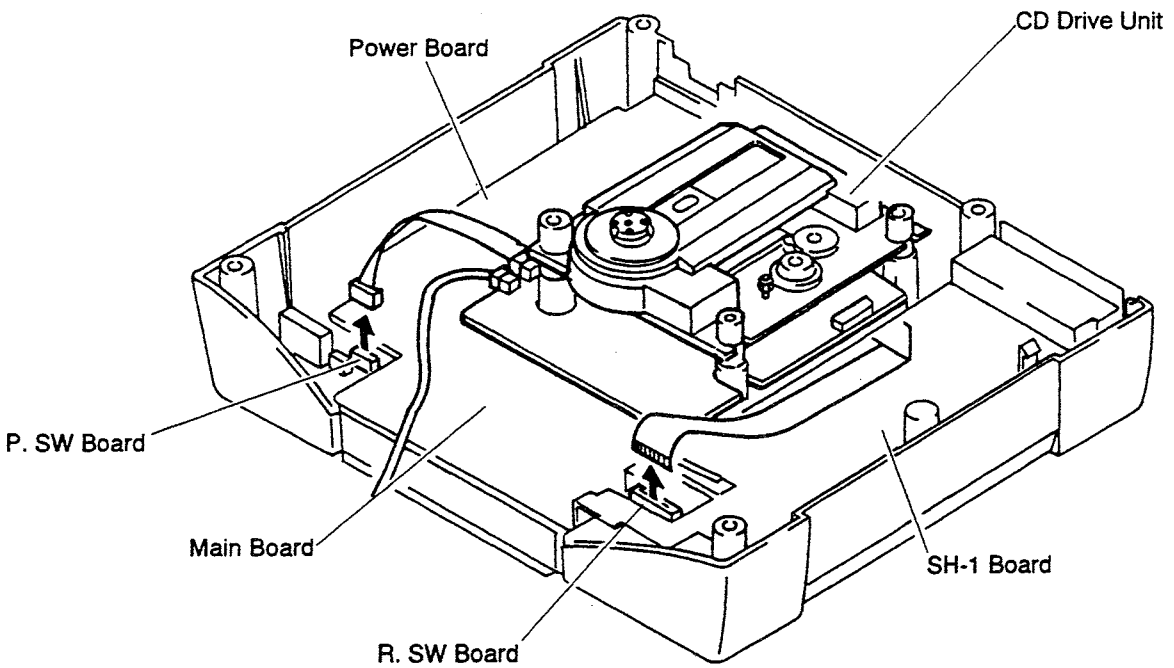


Fig. 4-1

5. DISASSEMBLY PROCEDURE

5-1. Top Case Removal

- 1) Remove six screws (A) and then the top case in the direction of the arrow.

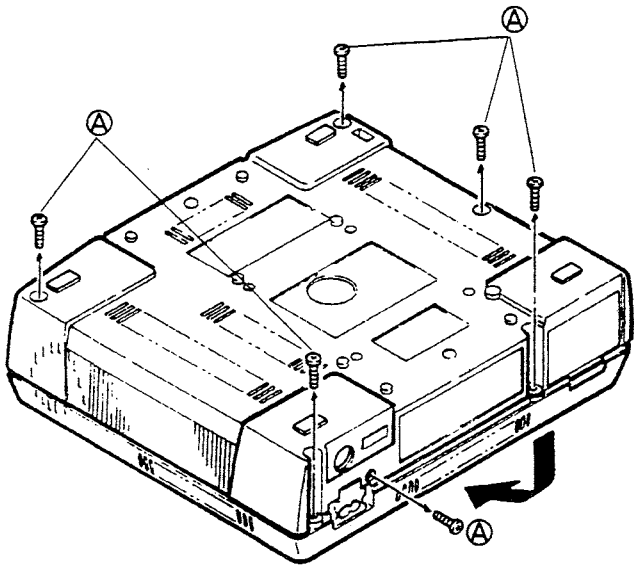


Fig. 5-1

5-3. CD Drive Unit Removal

- 1) Disconnect two connectors and one flat cable.
- 2) Remove the CD drive unit in the direction of arrow (G).

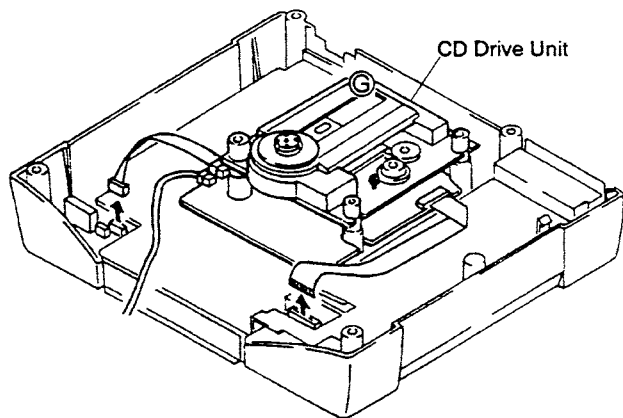


Fig. 5-3

5-2. CD Compartment Lid Removal

- 1) Remove two screws (B) and then the bracket lid CD spring.
- 2) Remove spring (C).
- 3) Remove two screws (D) and then the oil dumper.
- 4) Push the lever in the direction of arrow (E) to release the boss and then push the lever in the direction of arrow (F) to remove the CD compartment lid.

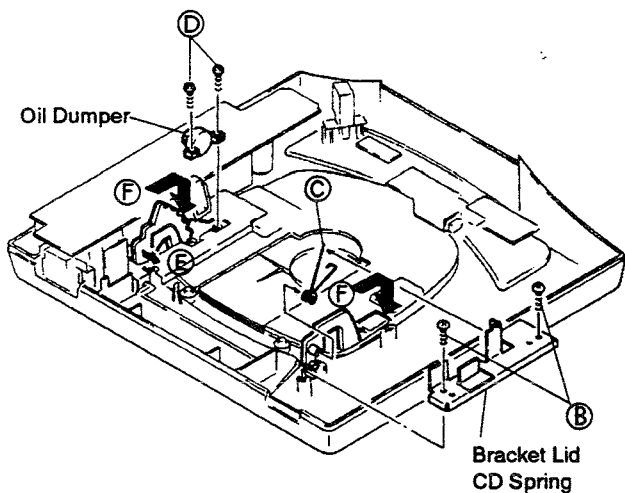


Fig. 5-2

5-4. SH-1 Board Removal

- 1) Remove four screws (H) and then the top shield plate.
- 2) Remove screw (I) and release three tabs, then lift the SH-1 board in the direction of arrow (J) to remove it.

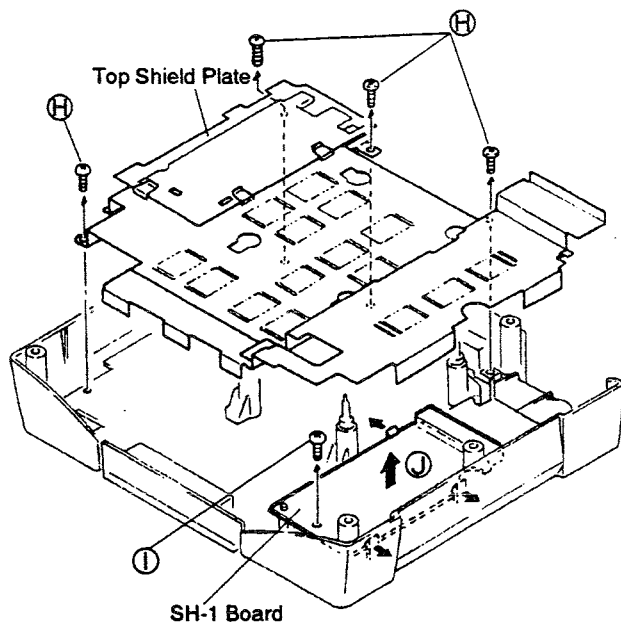


Fig. 5-4

5-5. Main Board Removal

- 1) Remove four screws (K) holding the CD drive unit supports.
- 2) Remove five screws (L) and then the main board.

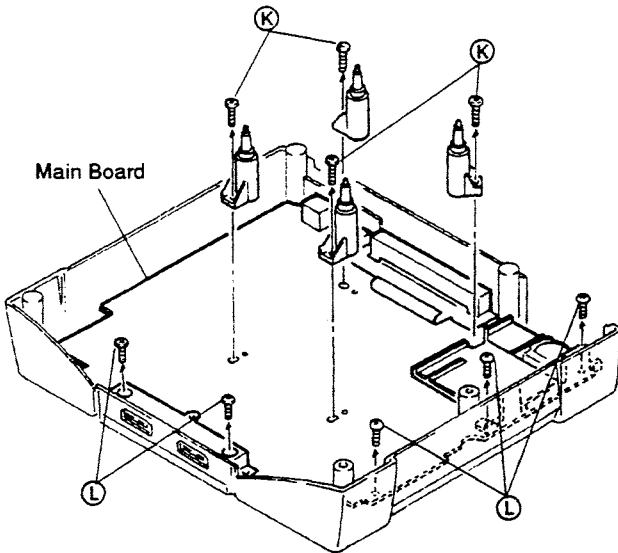


Fig. 5-5

5-6. Power, Power Indicator and R. SW Boards Removal

- 1) Remove three screws (M) and then the power board.
- 2) Remove screw (N) and then the power indicator board.
- 3) Remove two screws (O) and then the R. SW board.

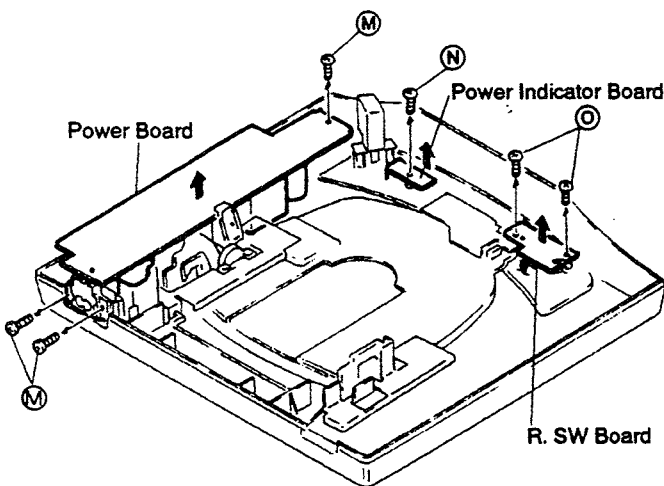


Fig. 5-6

6. CD DRIVE MAINTENANCE AND ADJUSTMENT

6-1. Maintenance of Pickup

1) Checking the laser diode


As the laser diode wears out, the RF level (amplitude of eye pattern) becomes lower.

Check that the RF level is 0.8V – 1.4Vp-p during maintenance. If the RF level is less than 0.8Vp-p then the pickup should be replaced.

2) Variable resistor on the APC board

The variable resistor attached to the pickup on the APC board is used to adjust the output power of the laser. This adjustment is done at the factory and can not be performed in the field. If the laser's output power is low, the laser diode has worn out and should be replaced. Adjusting this variable resistor may cause damage to the laser diode.

6-2. Laser Pickup Replacement Procedure

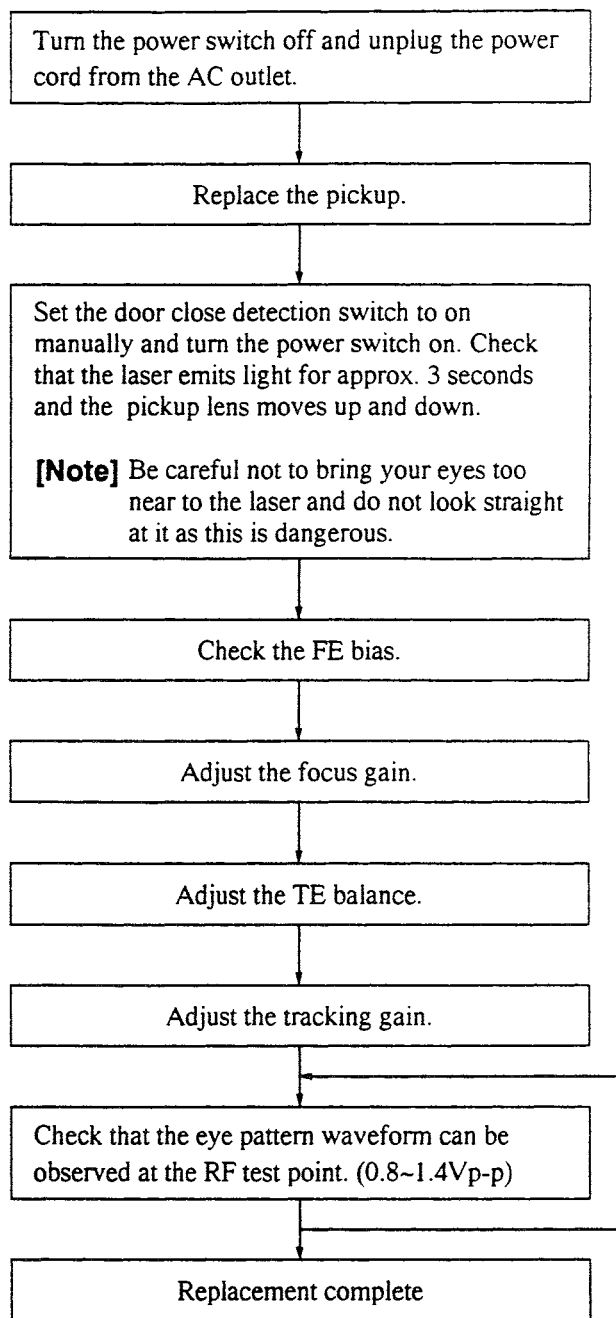

[Note] Since the adjustments influence each other, it may be necessary to repeat them 2 to 3 times.

Adjustment Preparation

Apply markings to the positions of the variable resistors before adjustment. If the adjustment are out of the specifications, the following symptoms may occur.

[Focus gain]

If the focus adjustment is too low the pickup lens will not be able to focus properly and the disk will not rotate. If the adjustment is too high portions of a track may be skipped and noise will increase.

[Tracking gain]

If the tracking adjustment is too low the drive is more susceptible to shocks or bumps, portions of a track may be skipped or the disk time counter may stop.

If the adjustment is too high the pickup lens may oscillate leading to unstable or distorted sound.

The focus and tracking adjustments are done so as to mutually satisfy conflicting characteristics.

6-3. Test equipment and tools necessary for adjustment

1. Oscilloscope
2. DC voltmeter
3. Non-metallic adjustment screwdriver
4. Test CD (A-BEC TCD-792A)

6-4. CD Drive Unit Adjustment Procedure

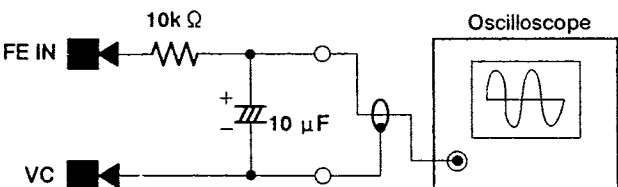
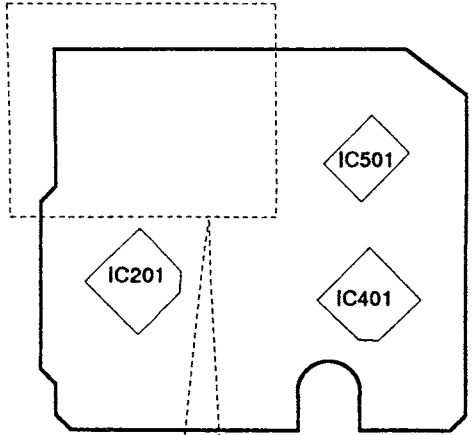


Fig. 6-2

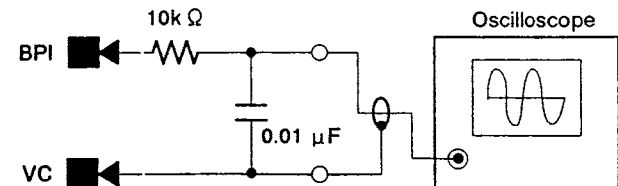


Fig. 6-3

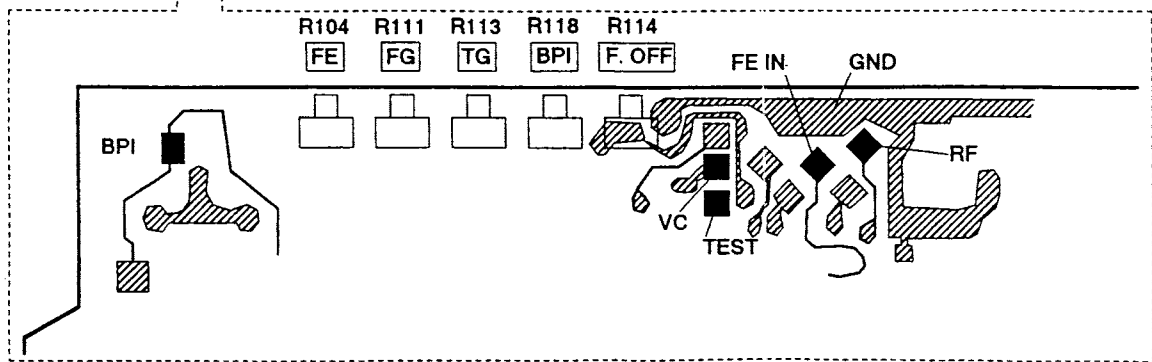


Fig. 6-1

6-4-1. FE (Focus Error) bias adjustment and focus gain adjustment

1. Connect the oscilloscope to test point FE IN as shown in Fig. 6-2.
2. Turn the power switch on and set the CD drive to the stop mode.
3. Adjust R114 (FE bios) so the DC voltage at the test point (FE IN) is 0V.
4. Play the first track of the test CD and adjust R111 (Focus gain) so the DC voltage is - 7mV.

6-4-2. FE balance and tracking gain adjustments

1. Connect the oscilloscope to test point BP IN as shown in Fig. 6-3.
2. Turn the power switch on and play the first track of the test CD.
3. After play has begun, connect the TEST pin to GND.
4. Adjust R104 (FE balance) so the center voltage of the waveform is 0V.
5. Adjust R113 (tracking gain) so the amplitude of the waveform is 0.4V as in Fig. 6-4.


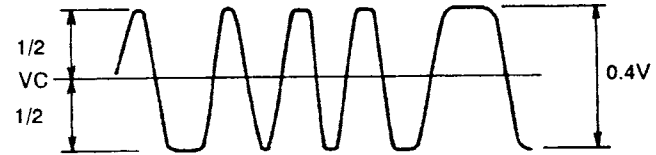



Fig. 6-4

7. BLOCK DIAGRAM

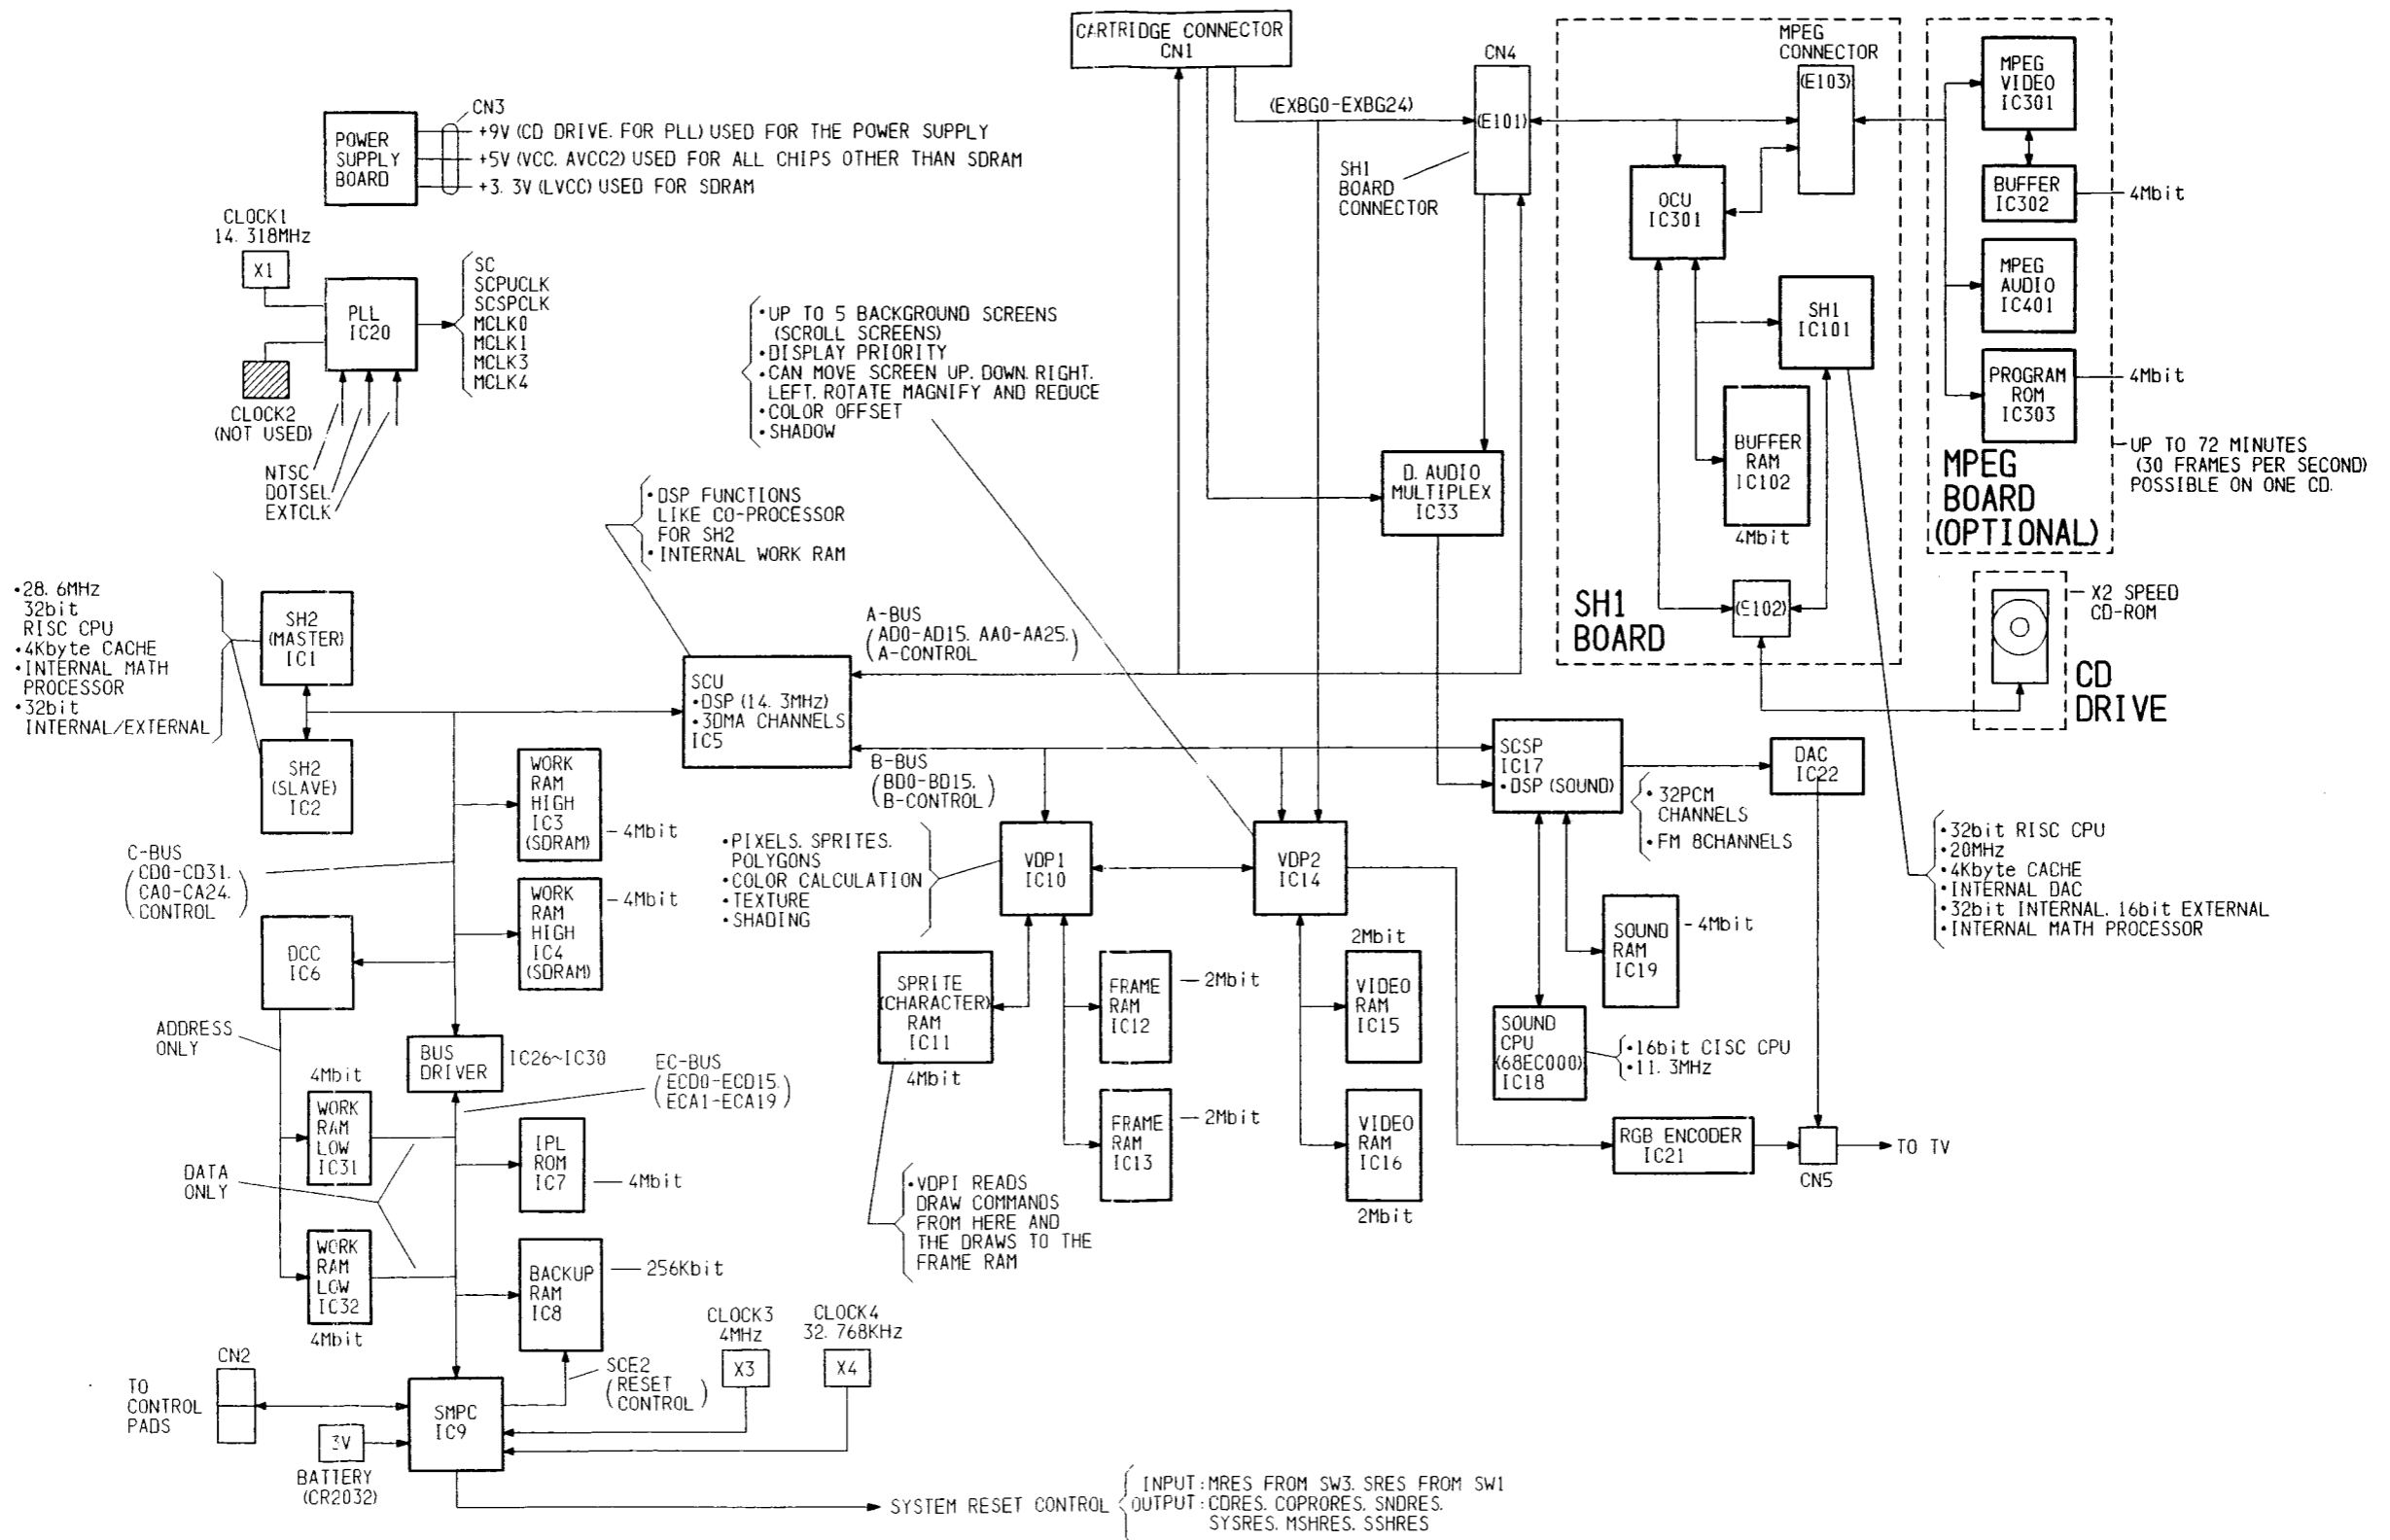


8. SCHEMATIC DIAGRAMS


8-1. Schematic Diagram-1 [Main C.B - 1/6]

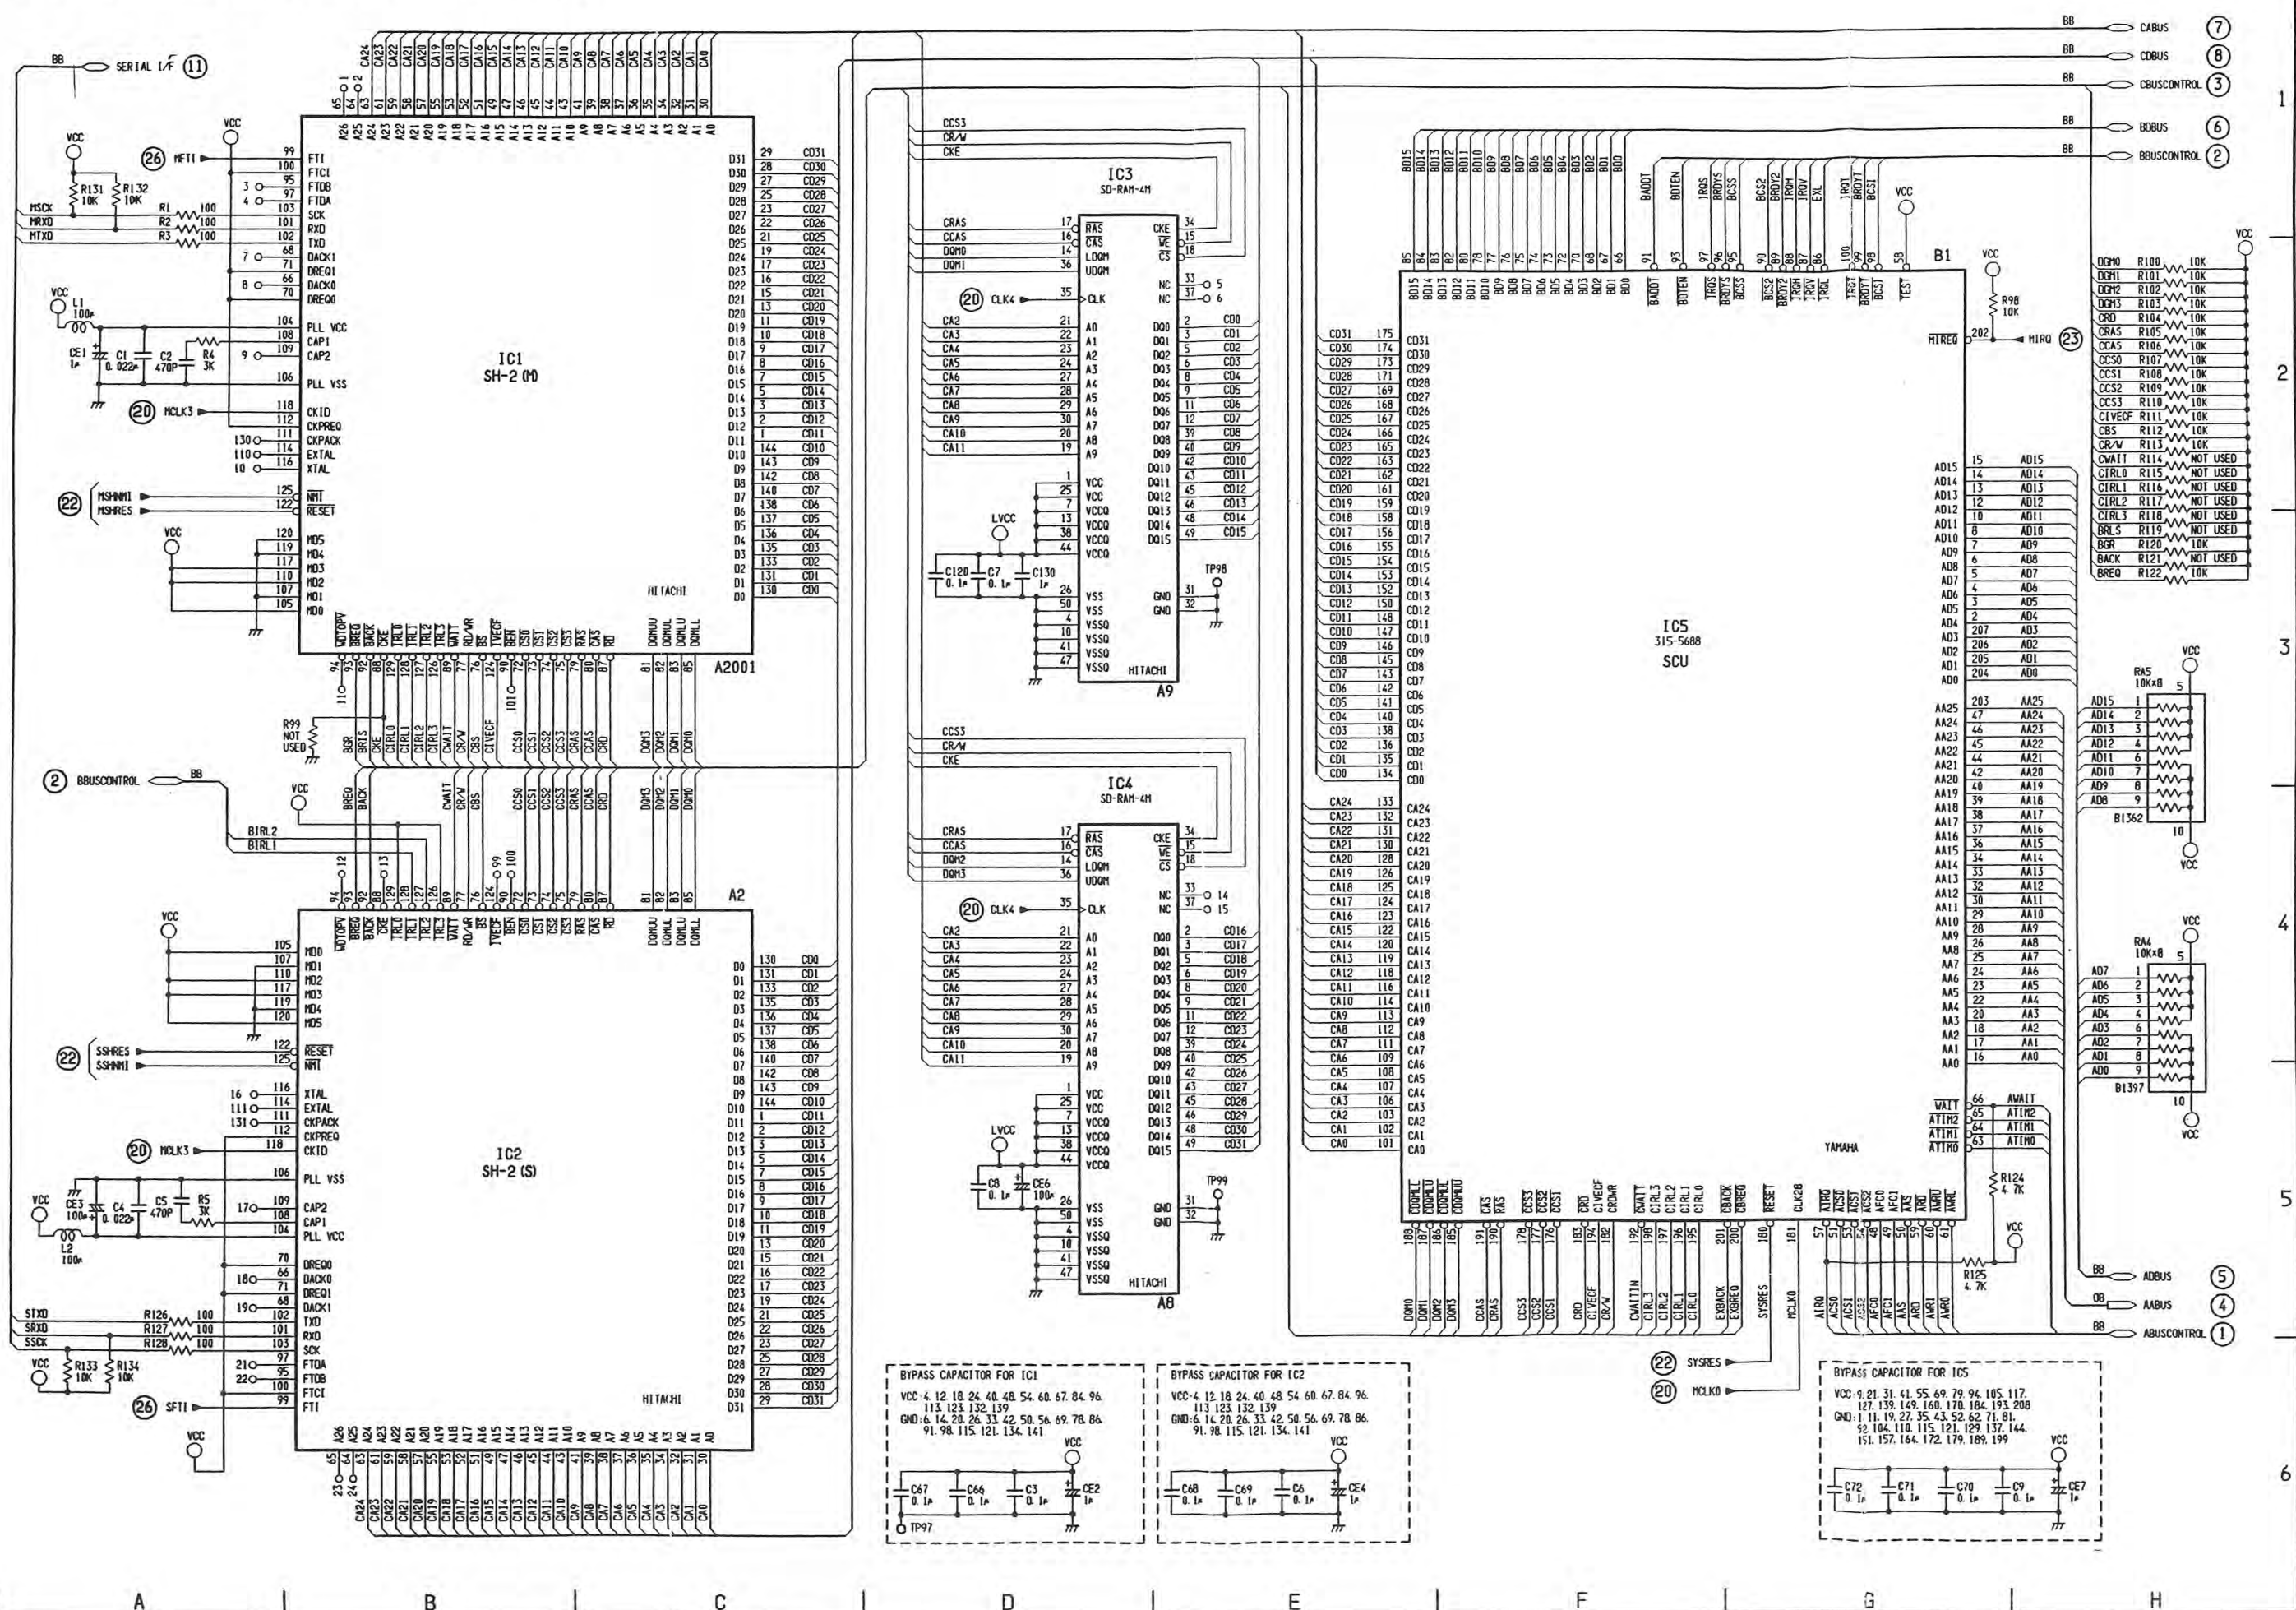


8-2. Schematic Diagram-2 [Main C.B - 2/6]

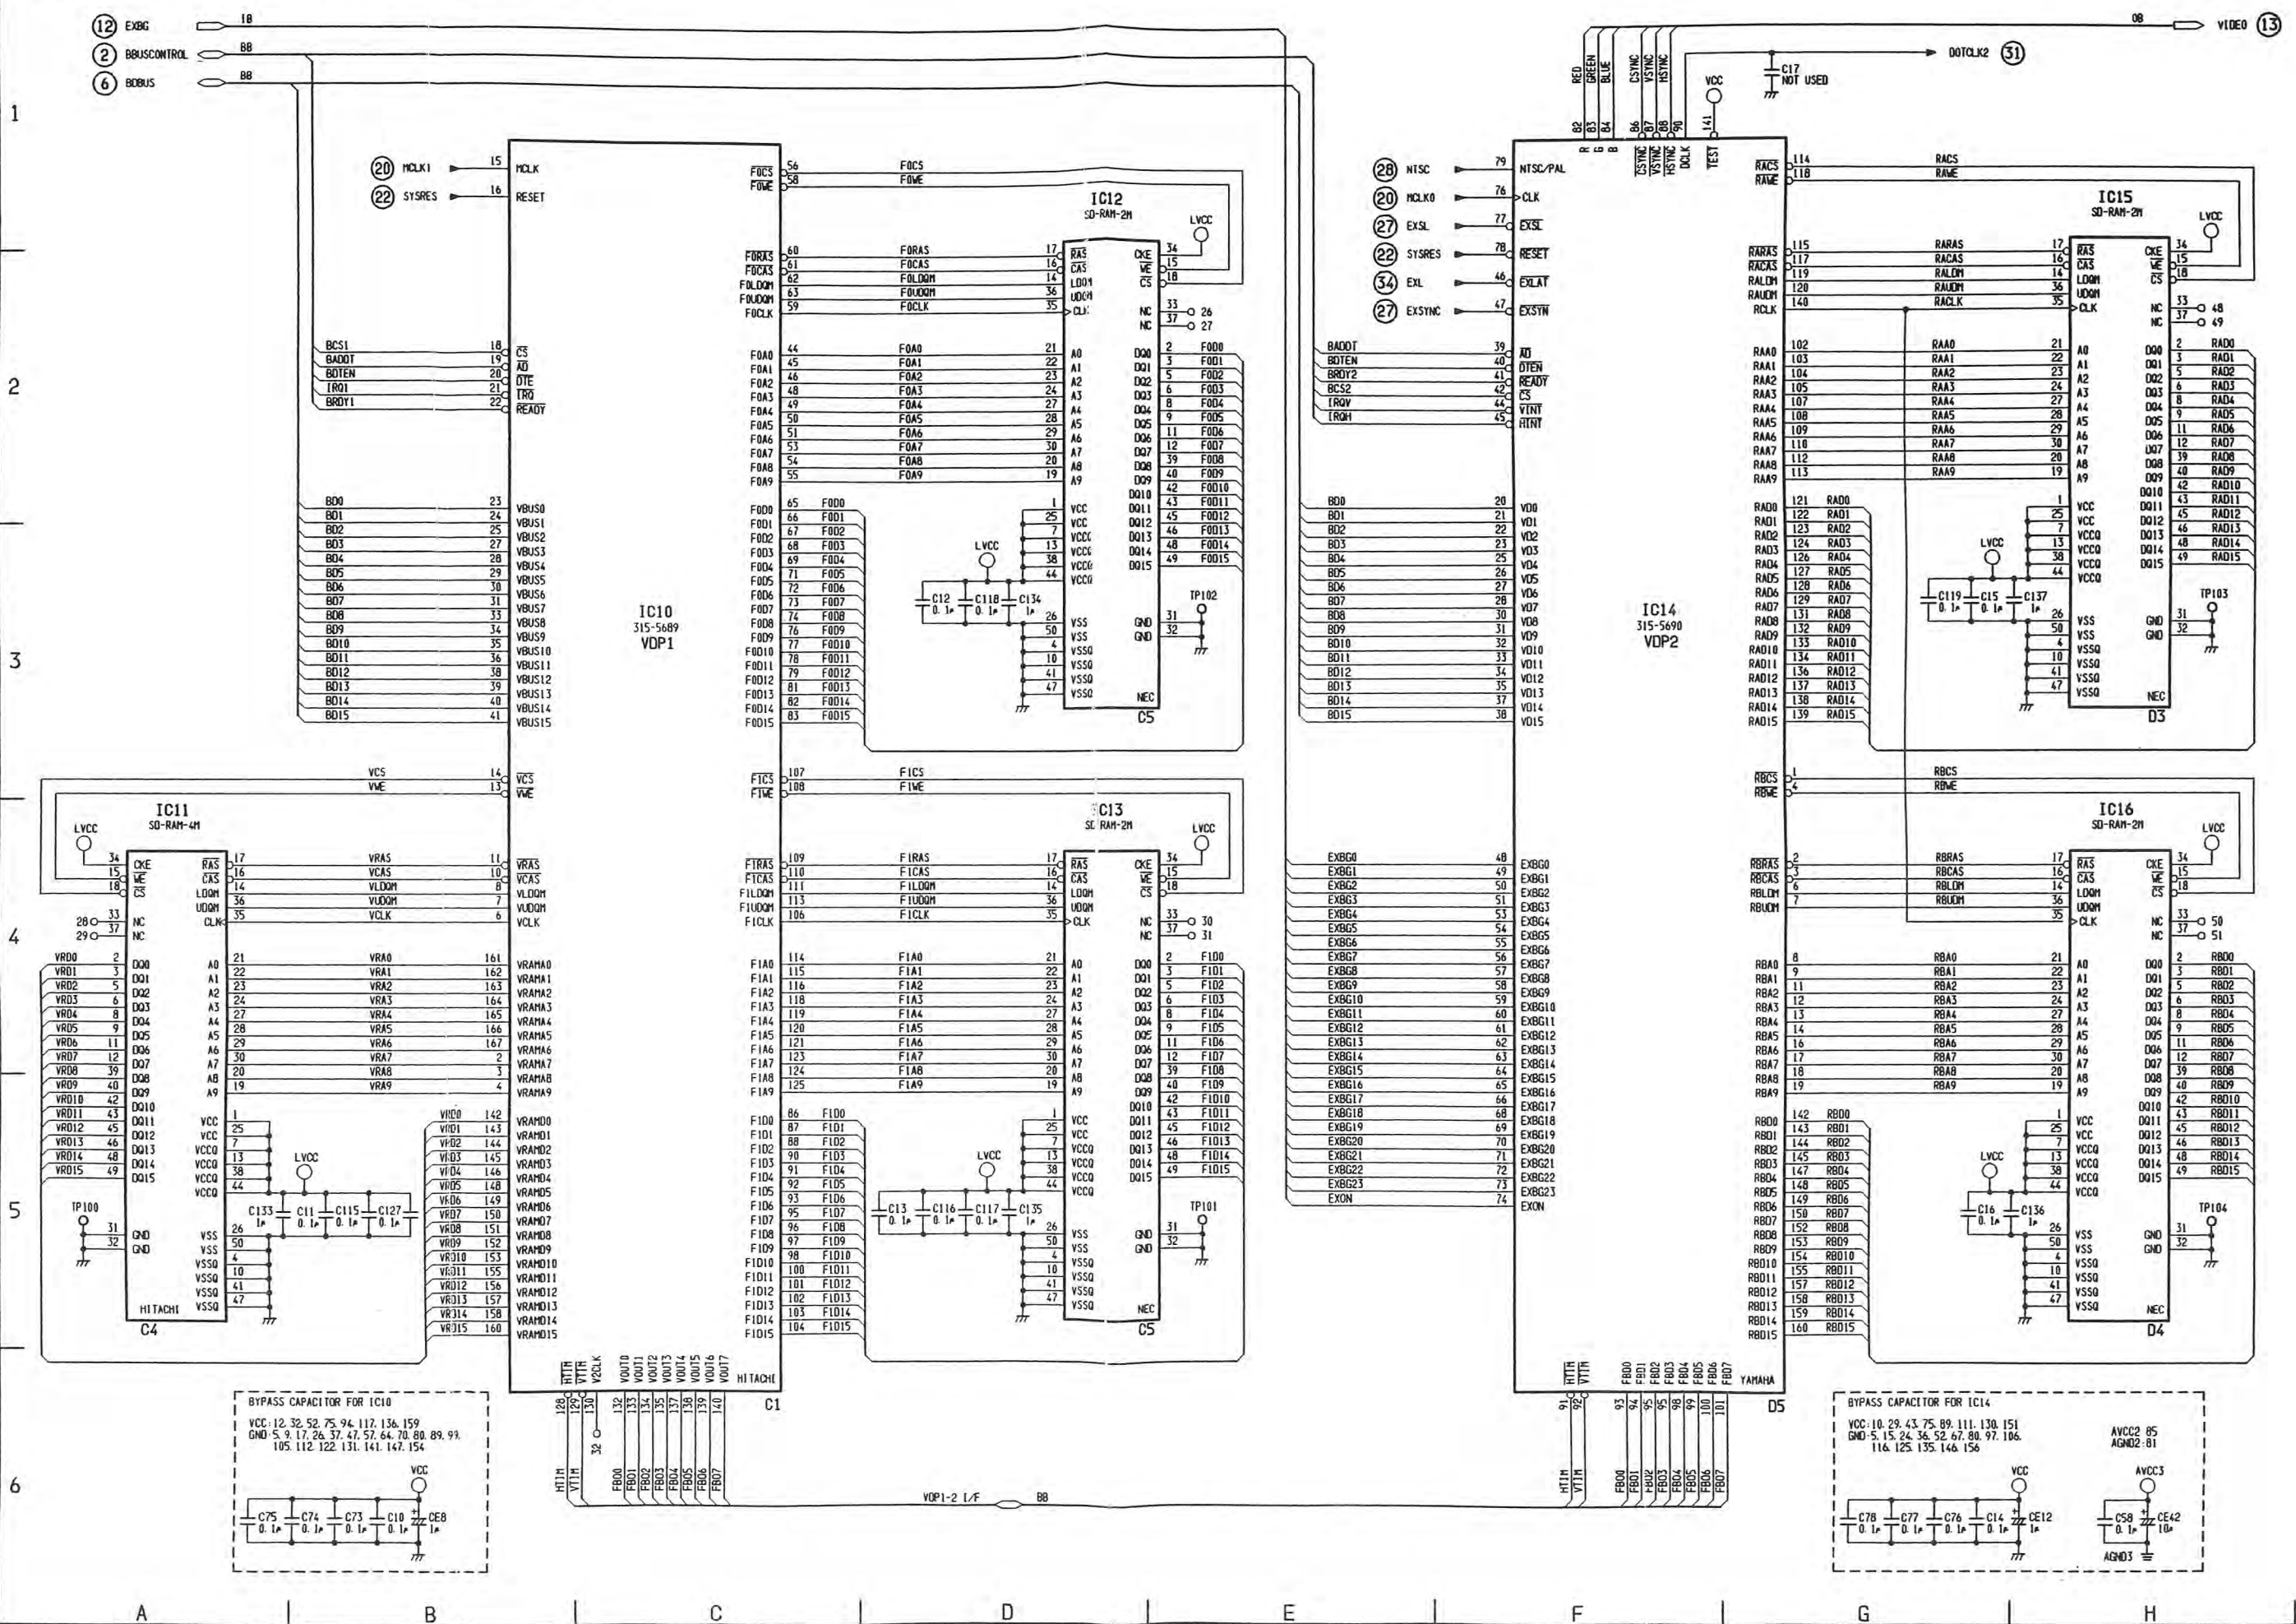


8-3. Schematic Diagram-3 [Main C.B - 3/6]

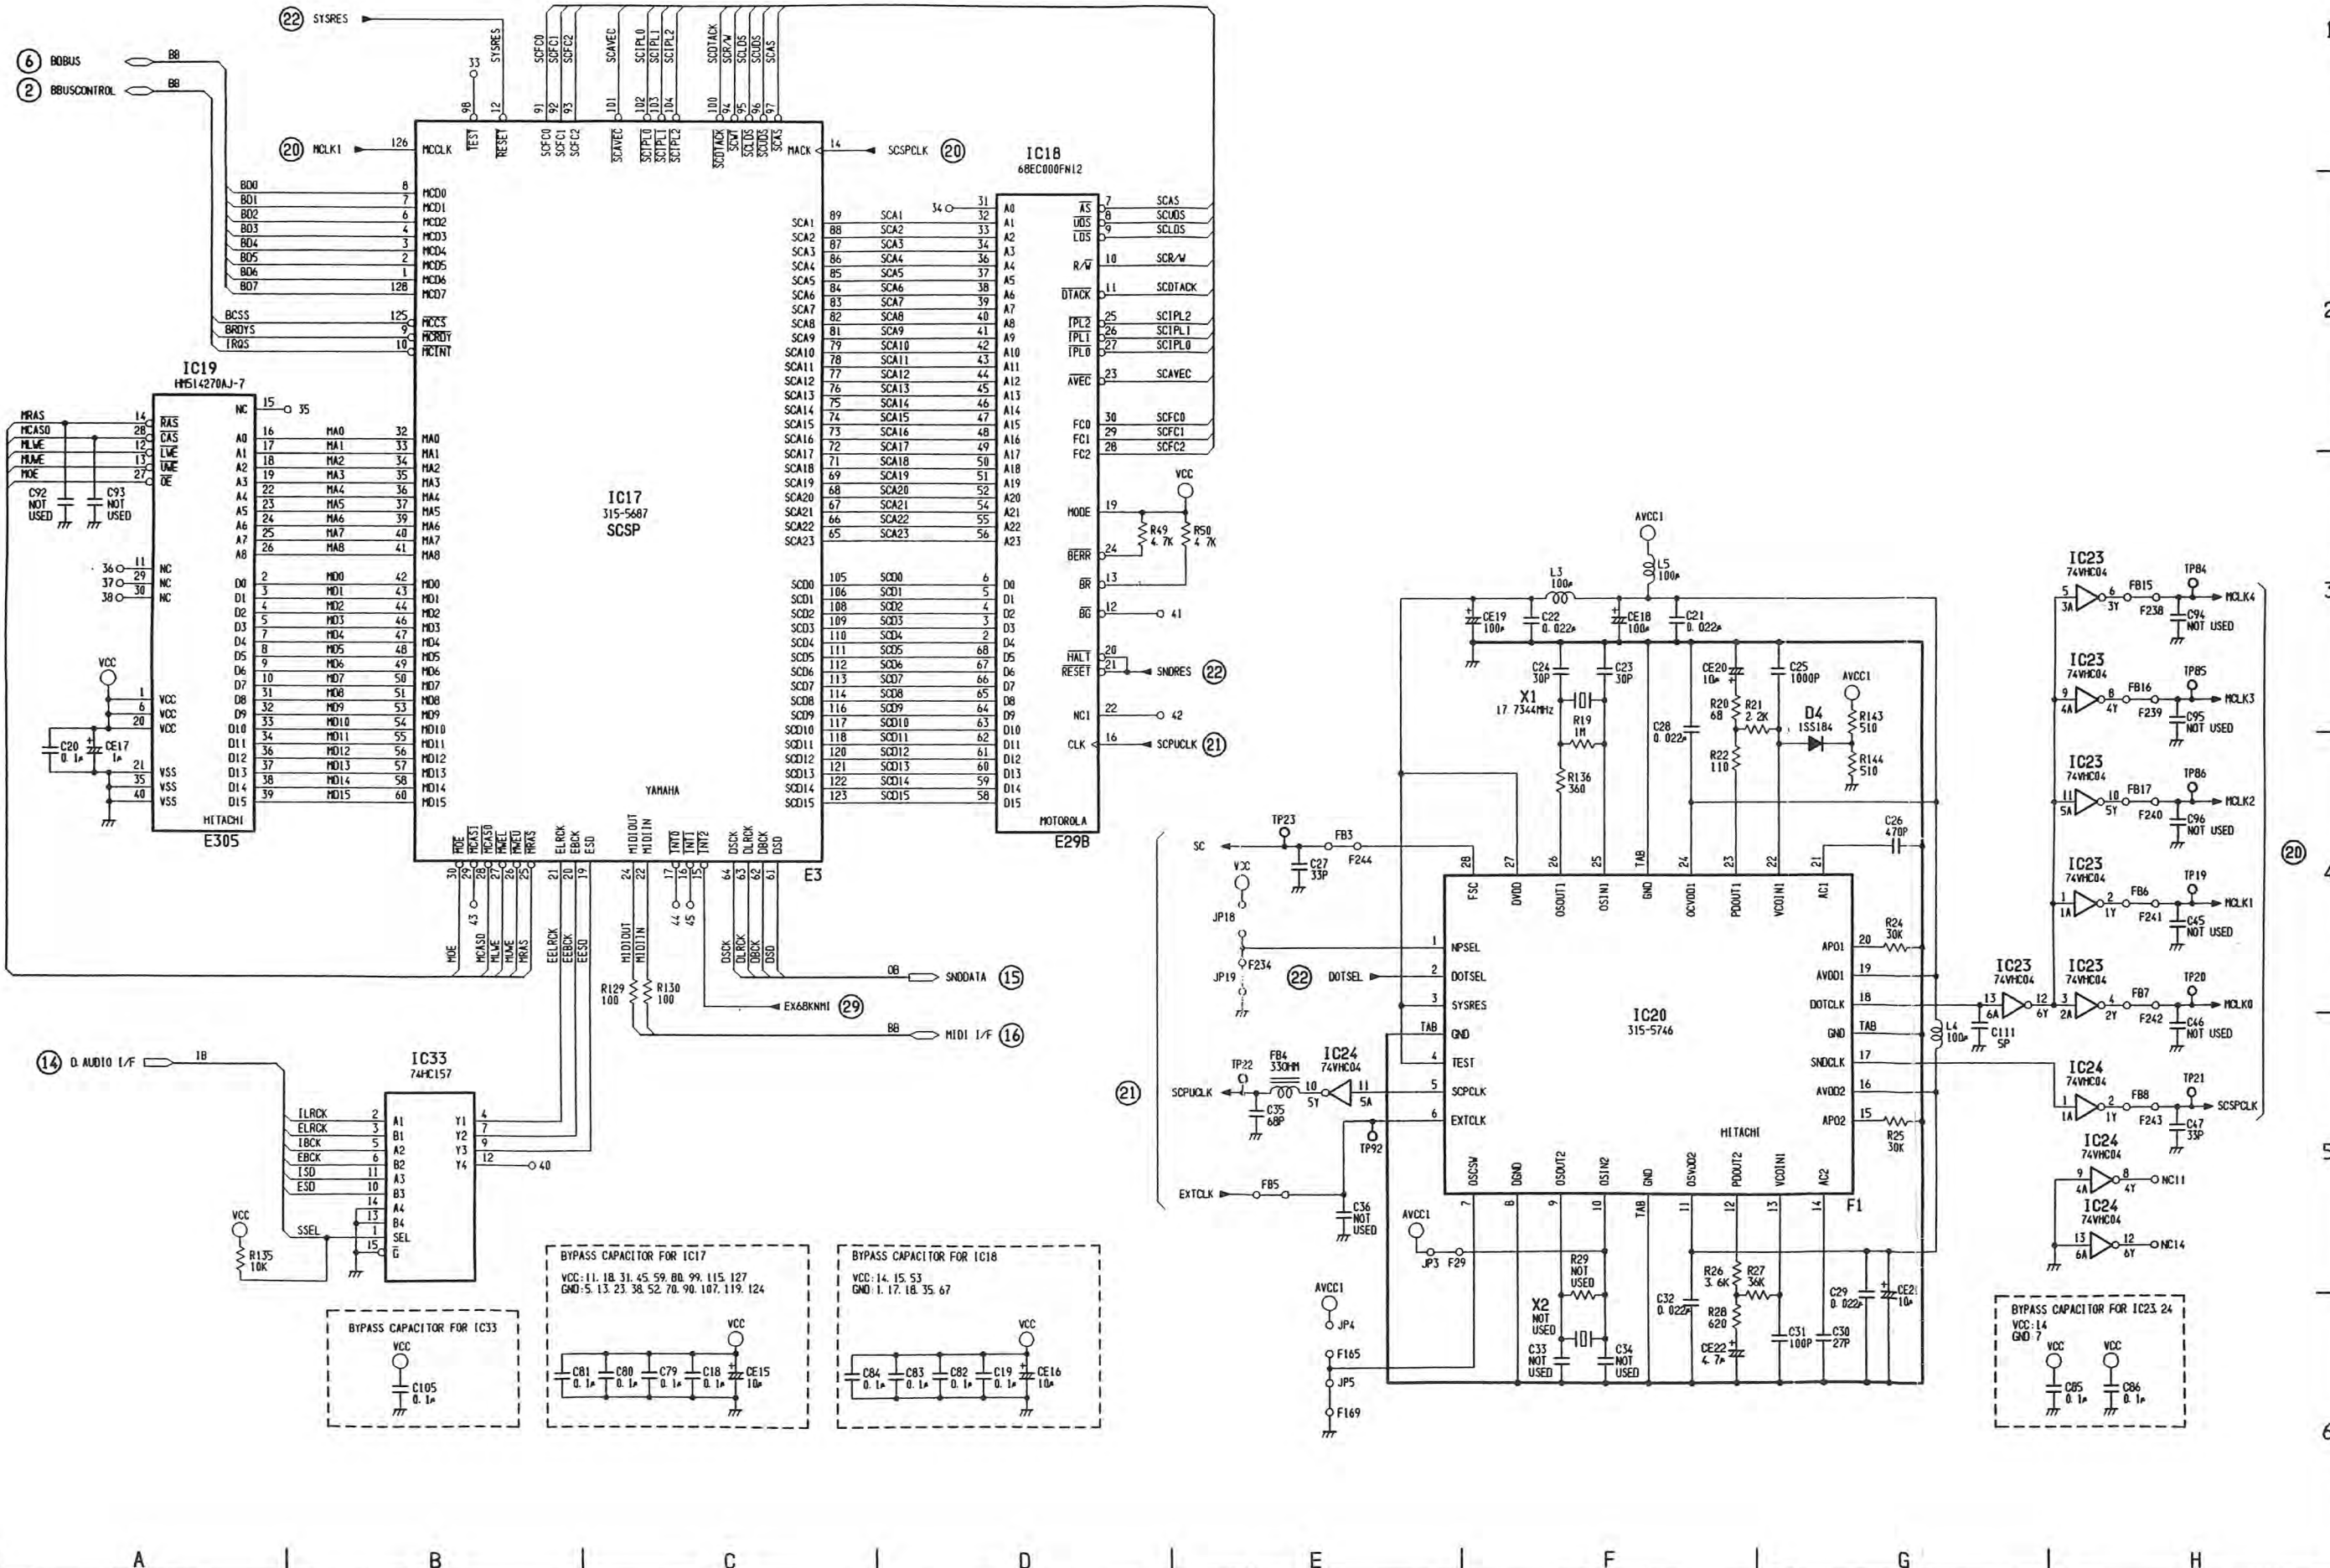


8-4. Schematic Diagram-4 [Main C.B - 4/6]

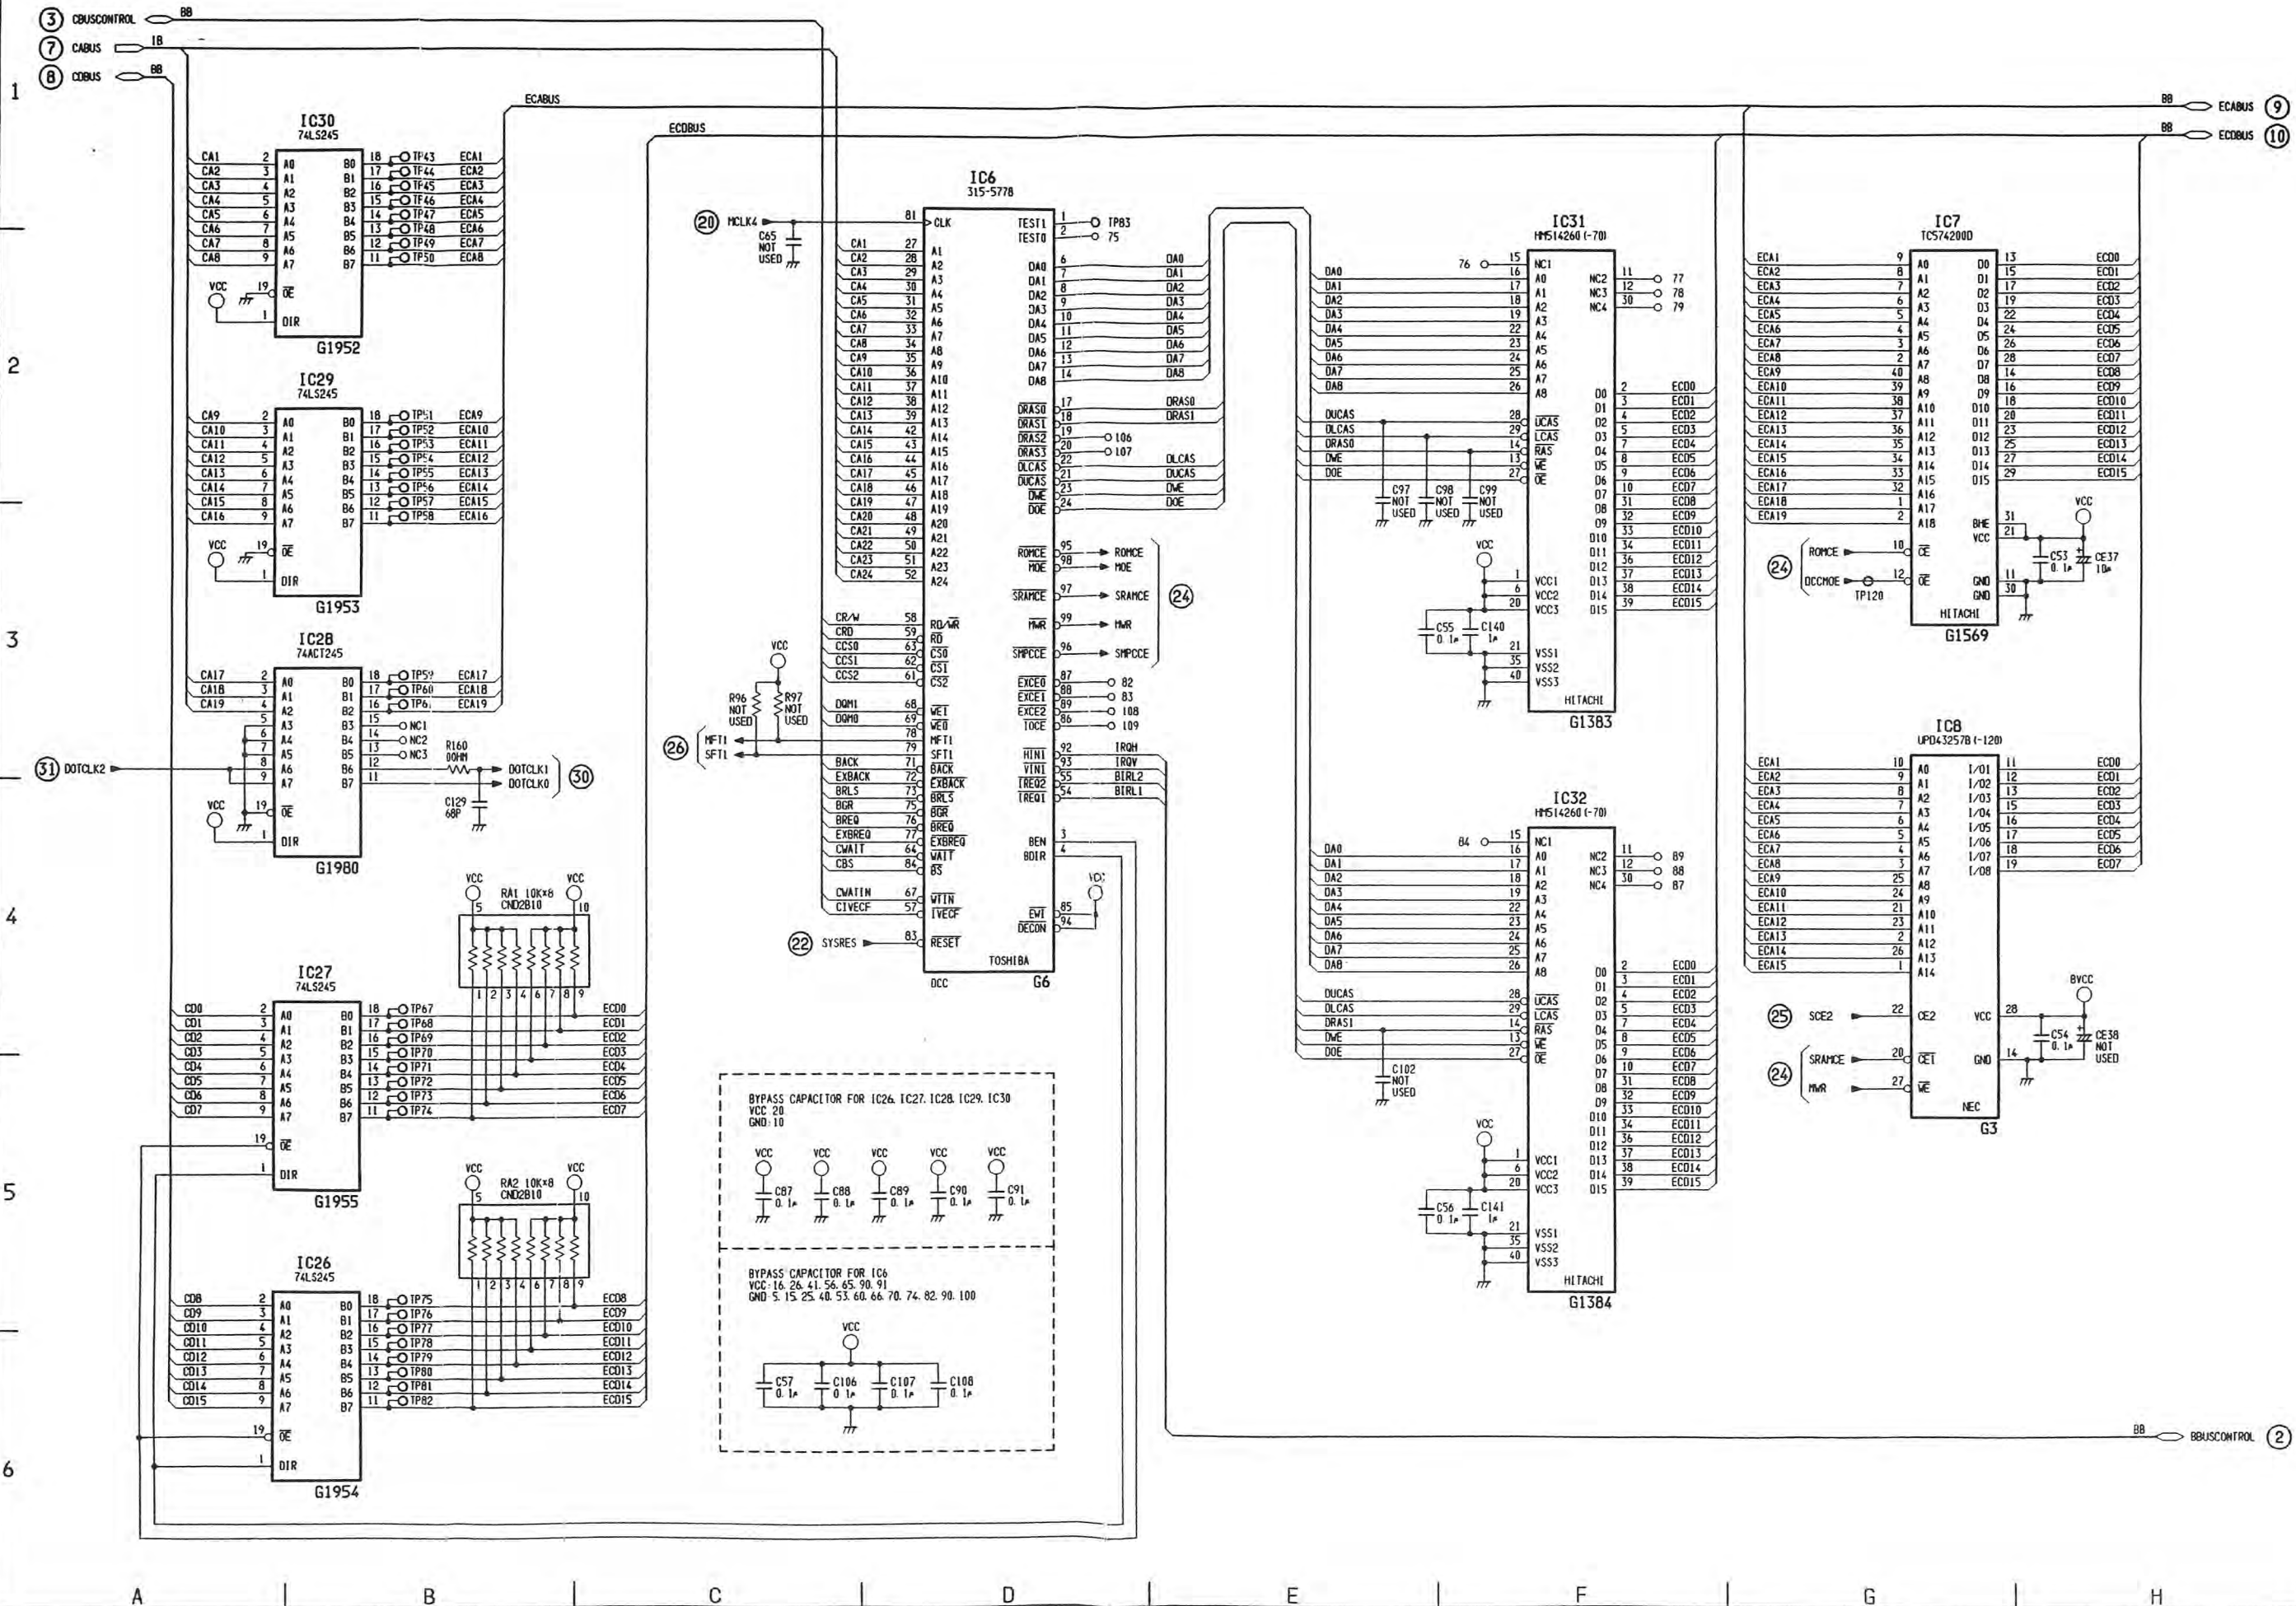

8-5. Schematic Diagram-5 [Main C.B - 5/6]

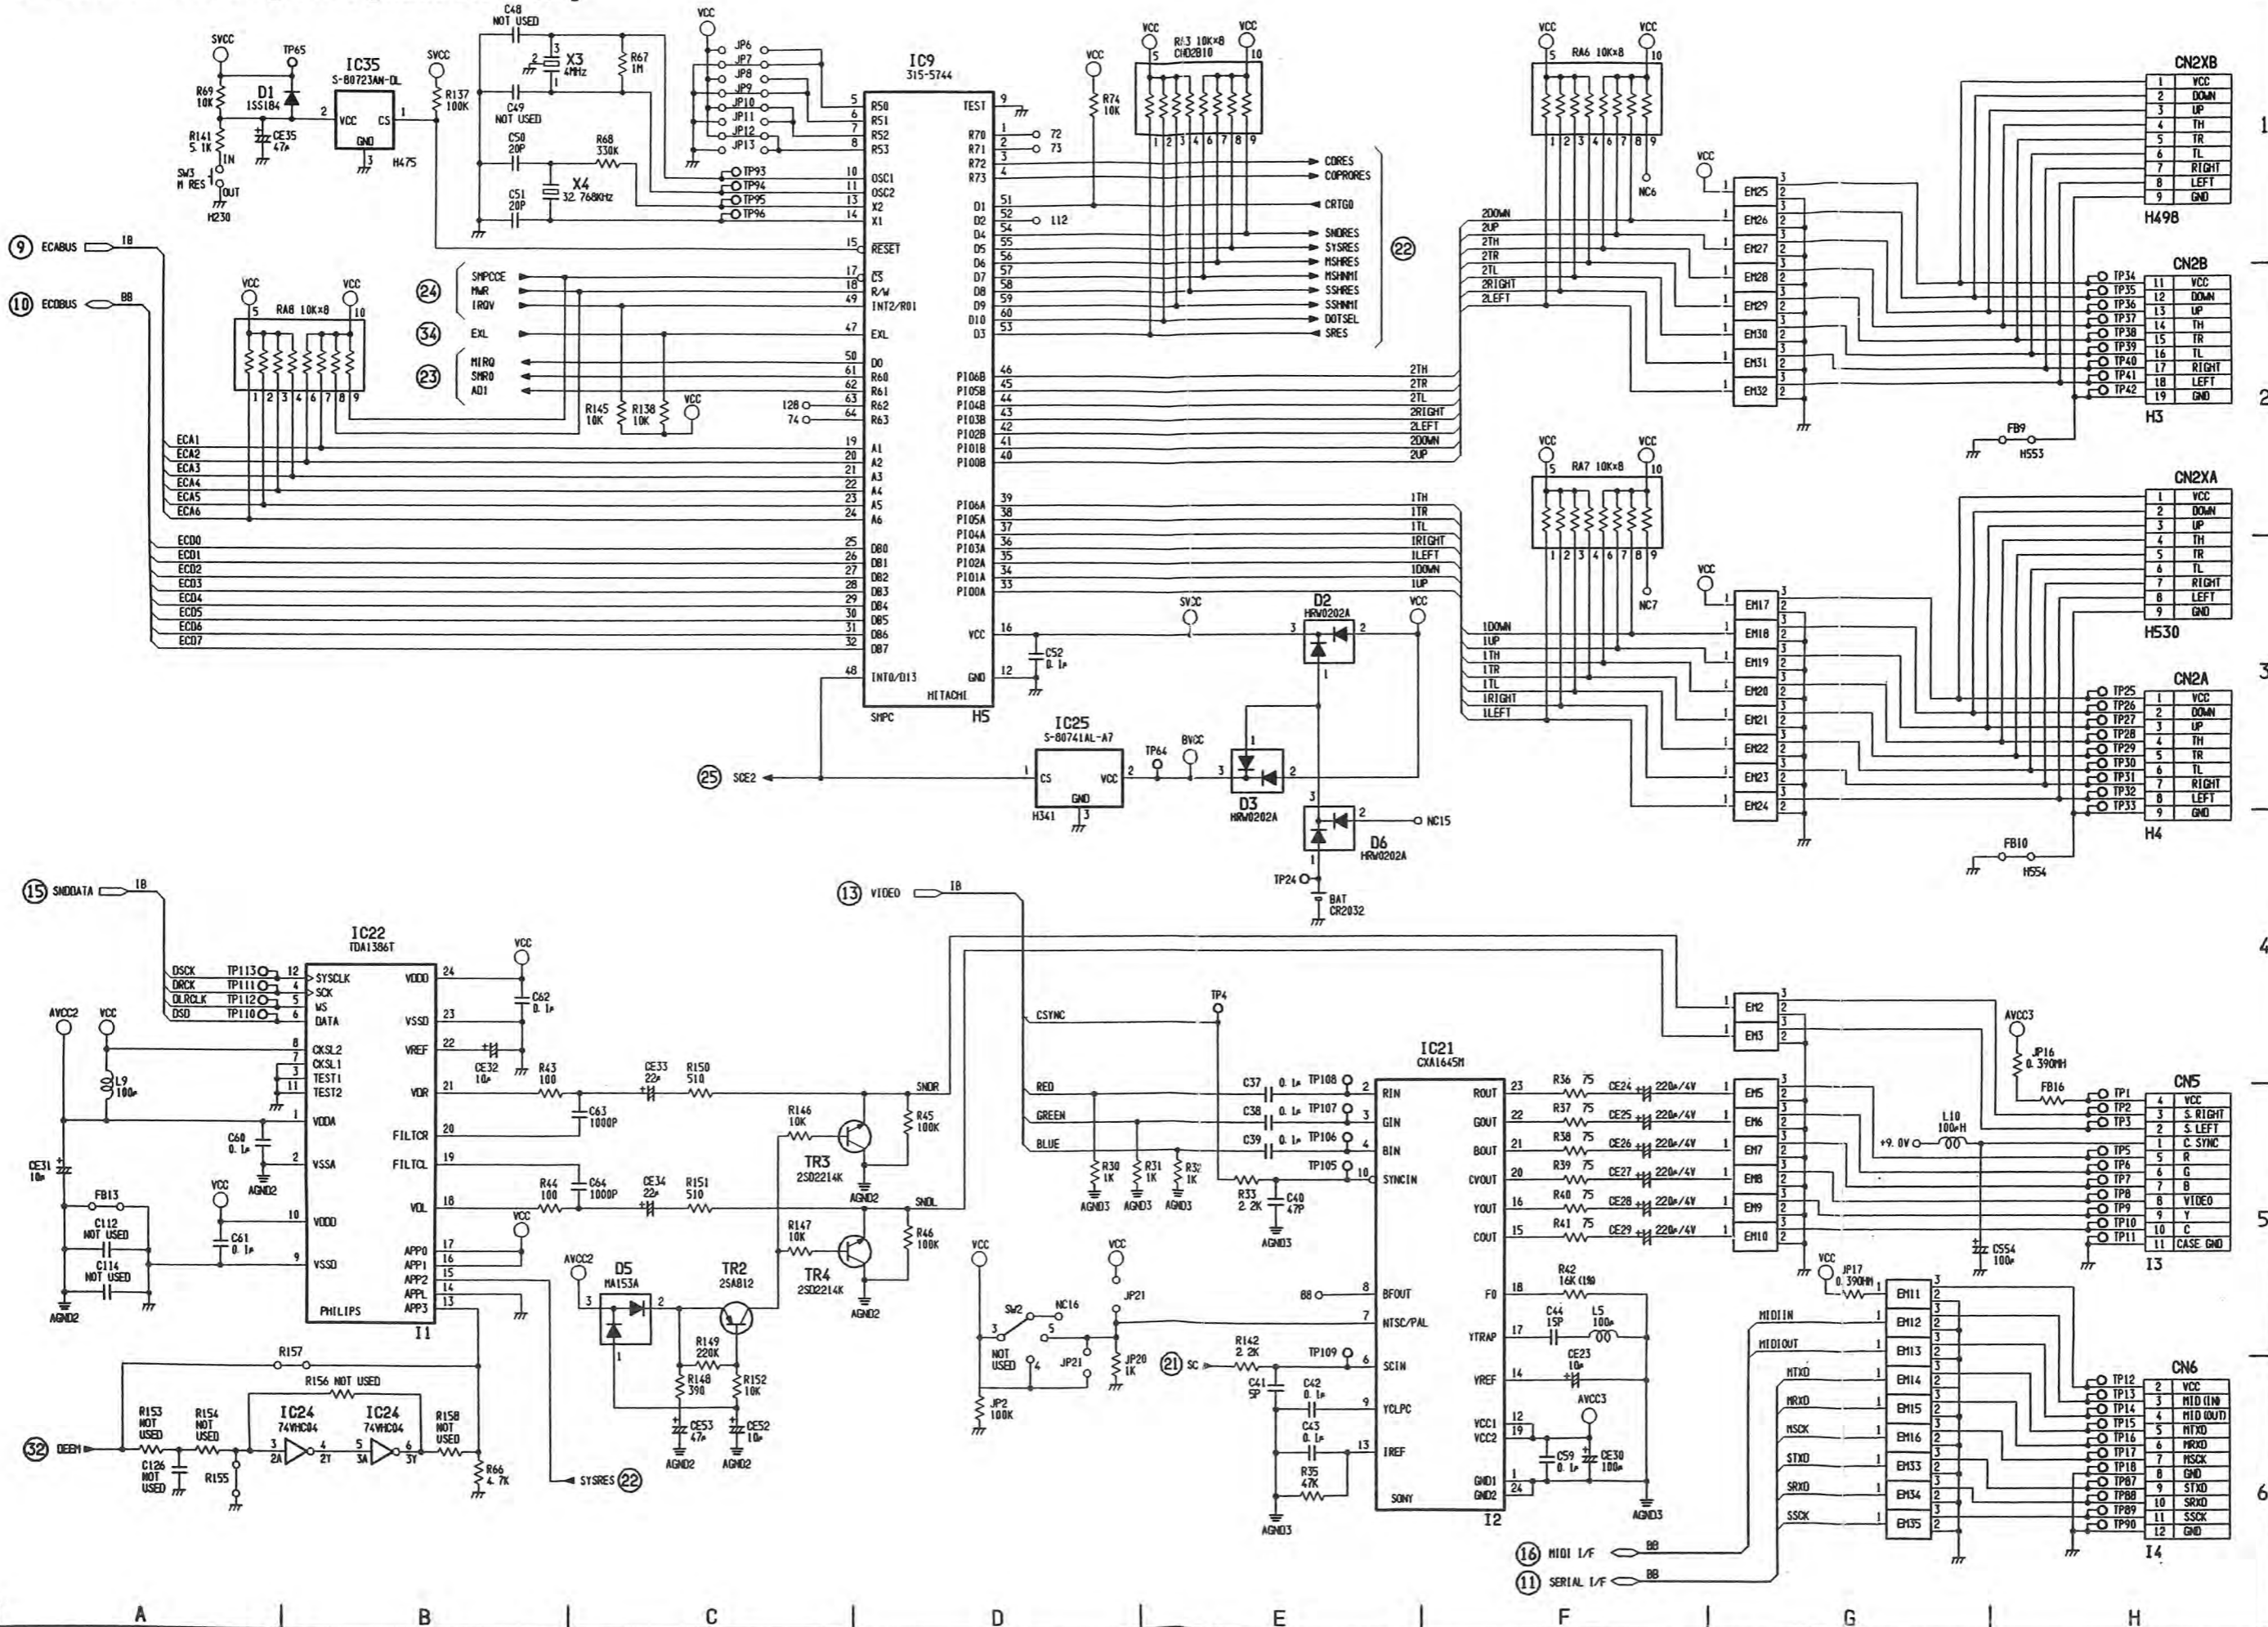



8-6. Schematic Diagram-6 [Main C.B - 6/6]

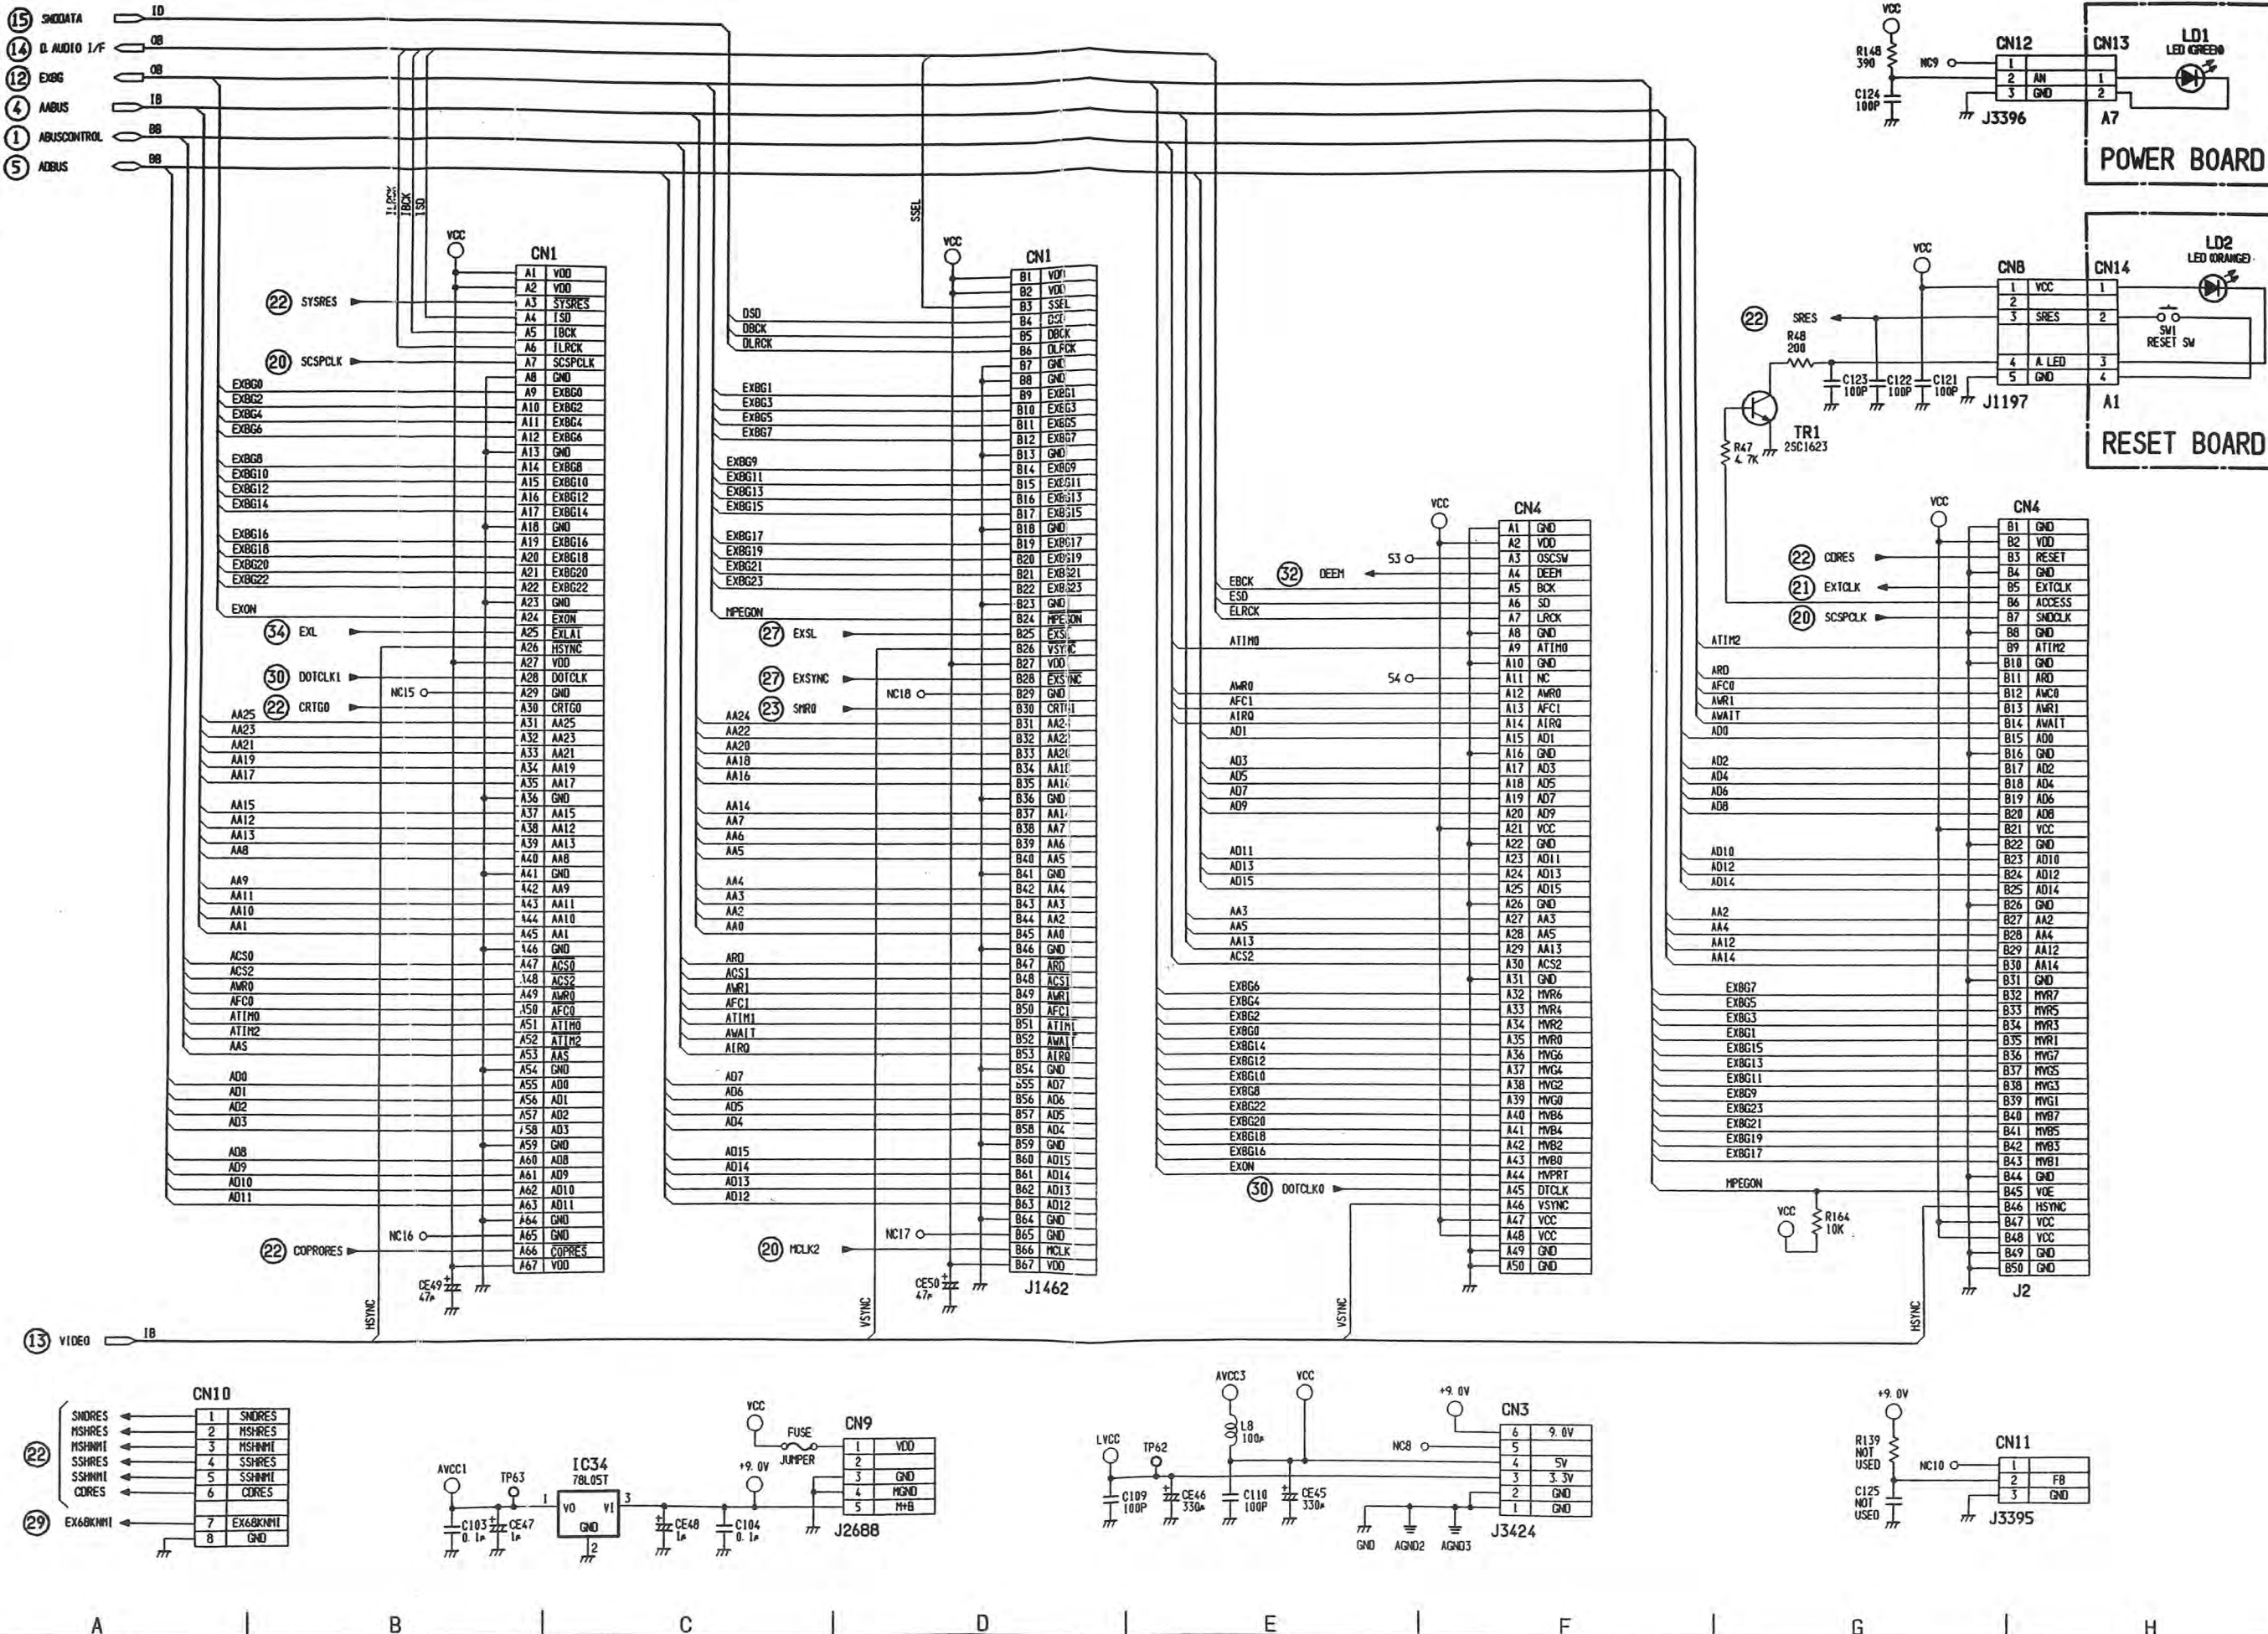

9. CIRCUIT BOARD DIAGRAMS



9-1. Main Circuit Board

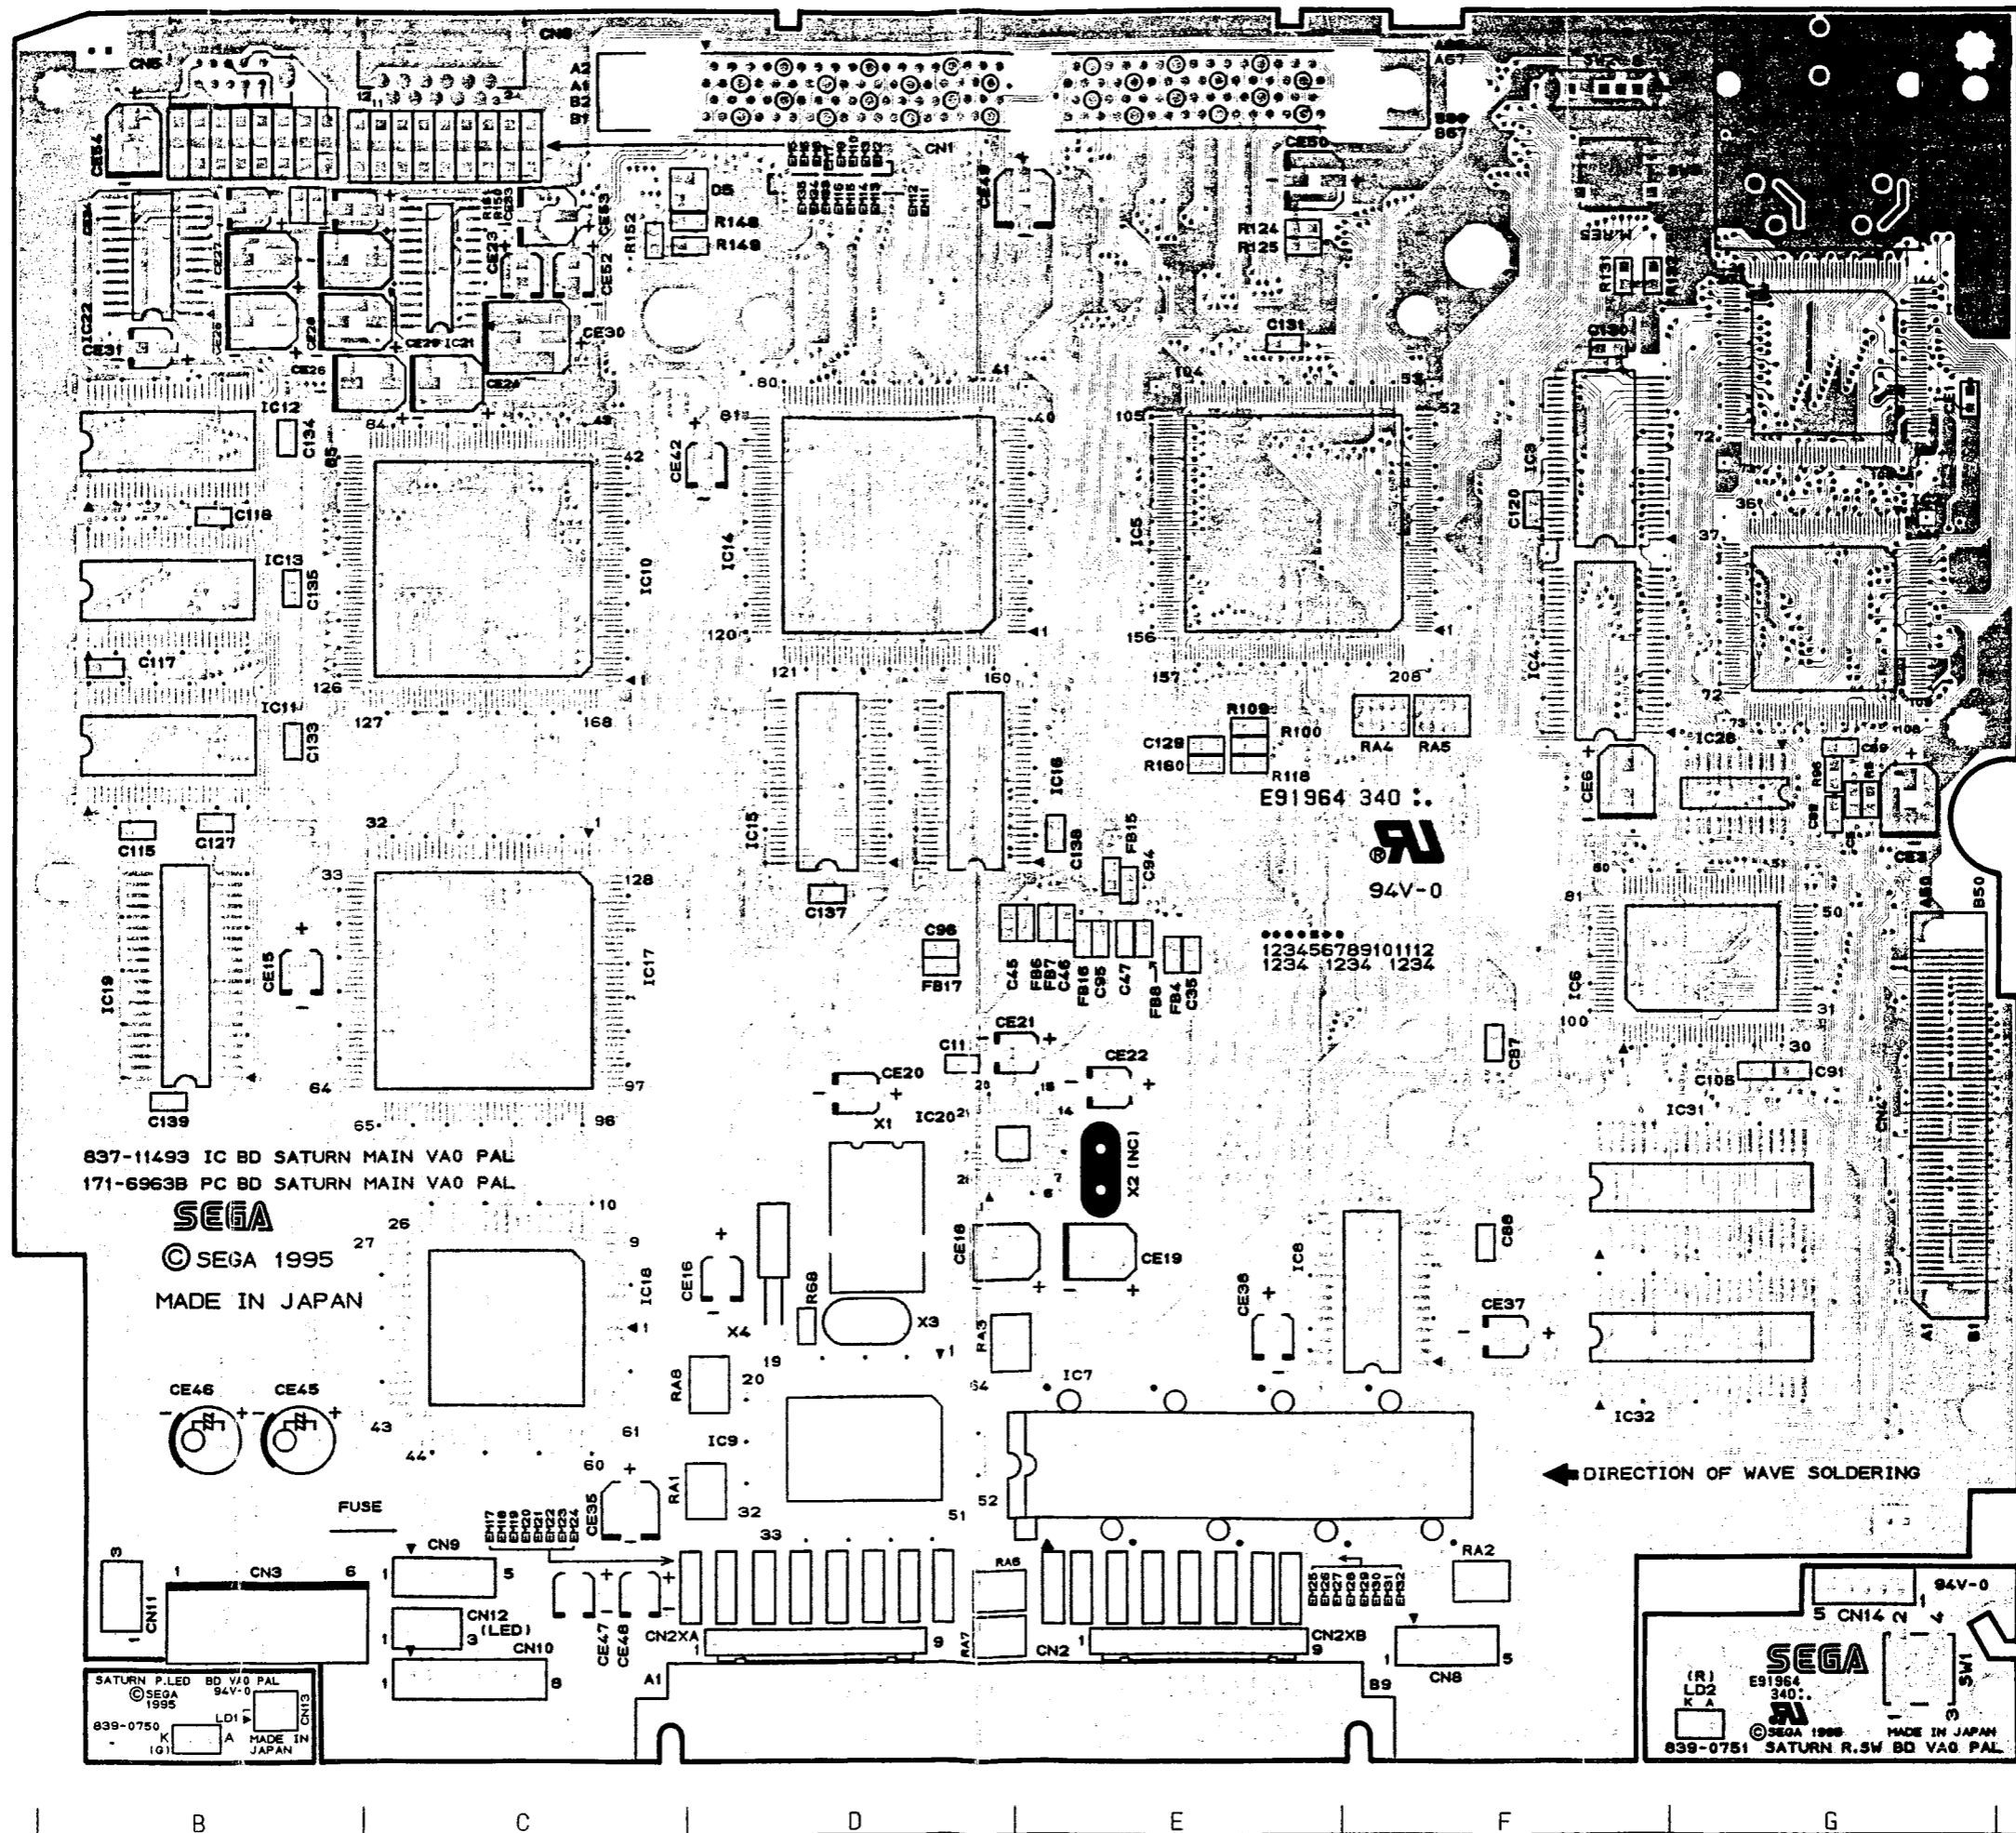

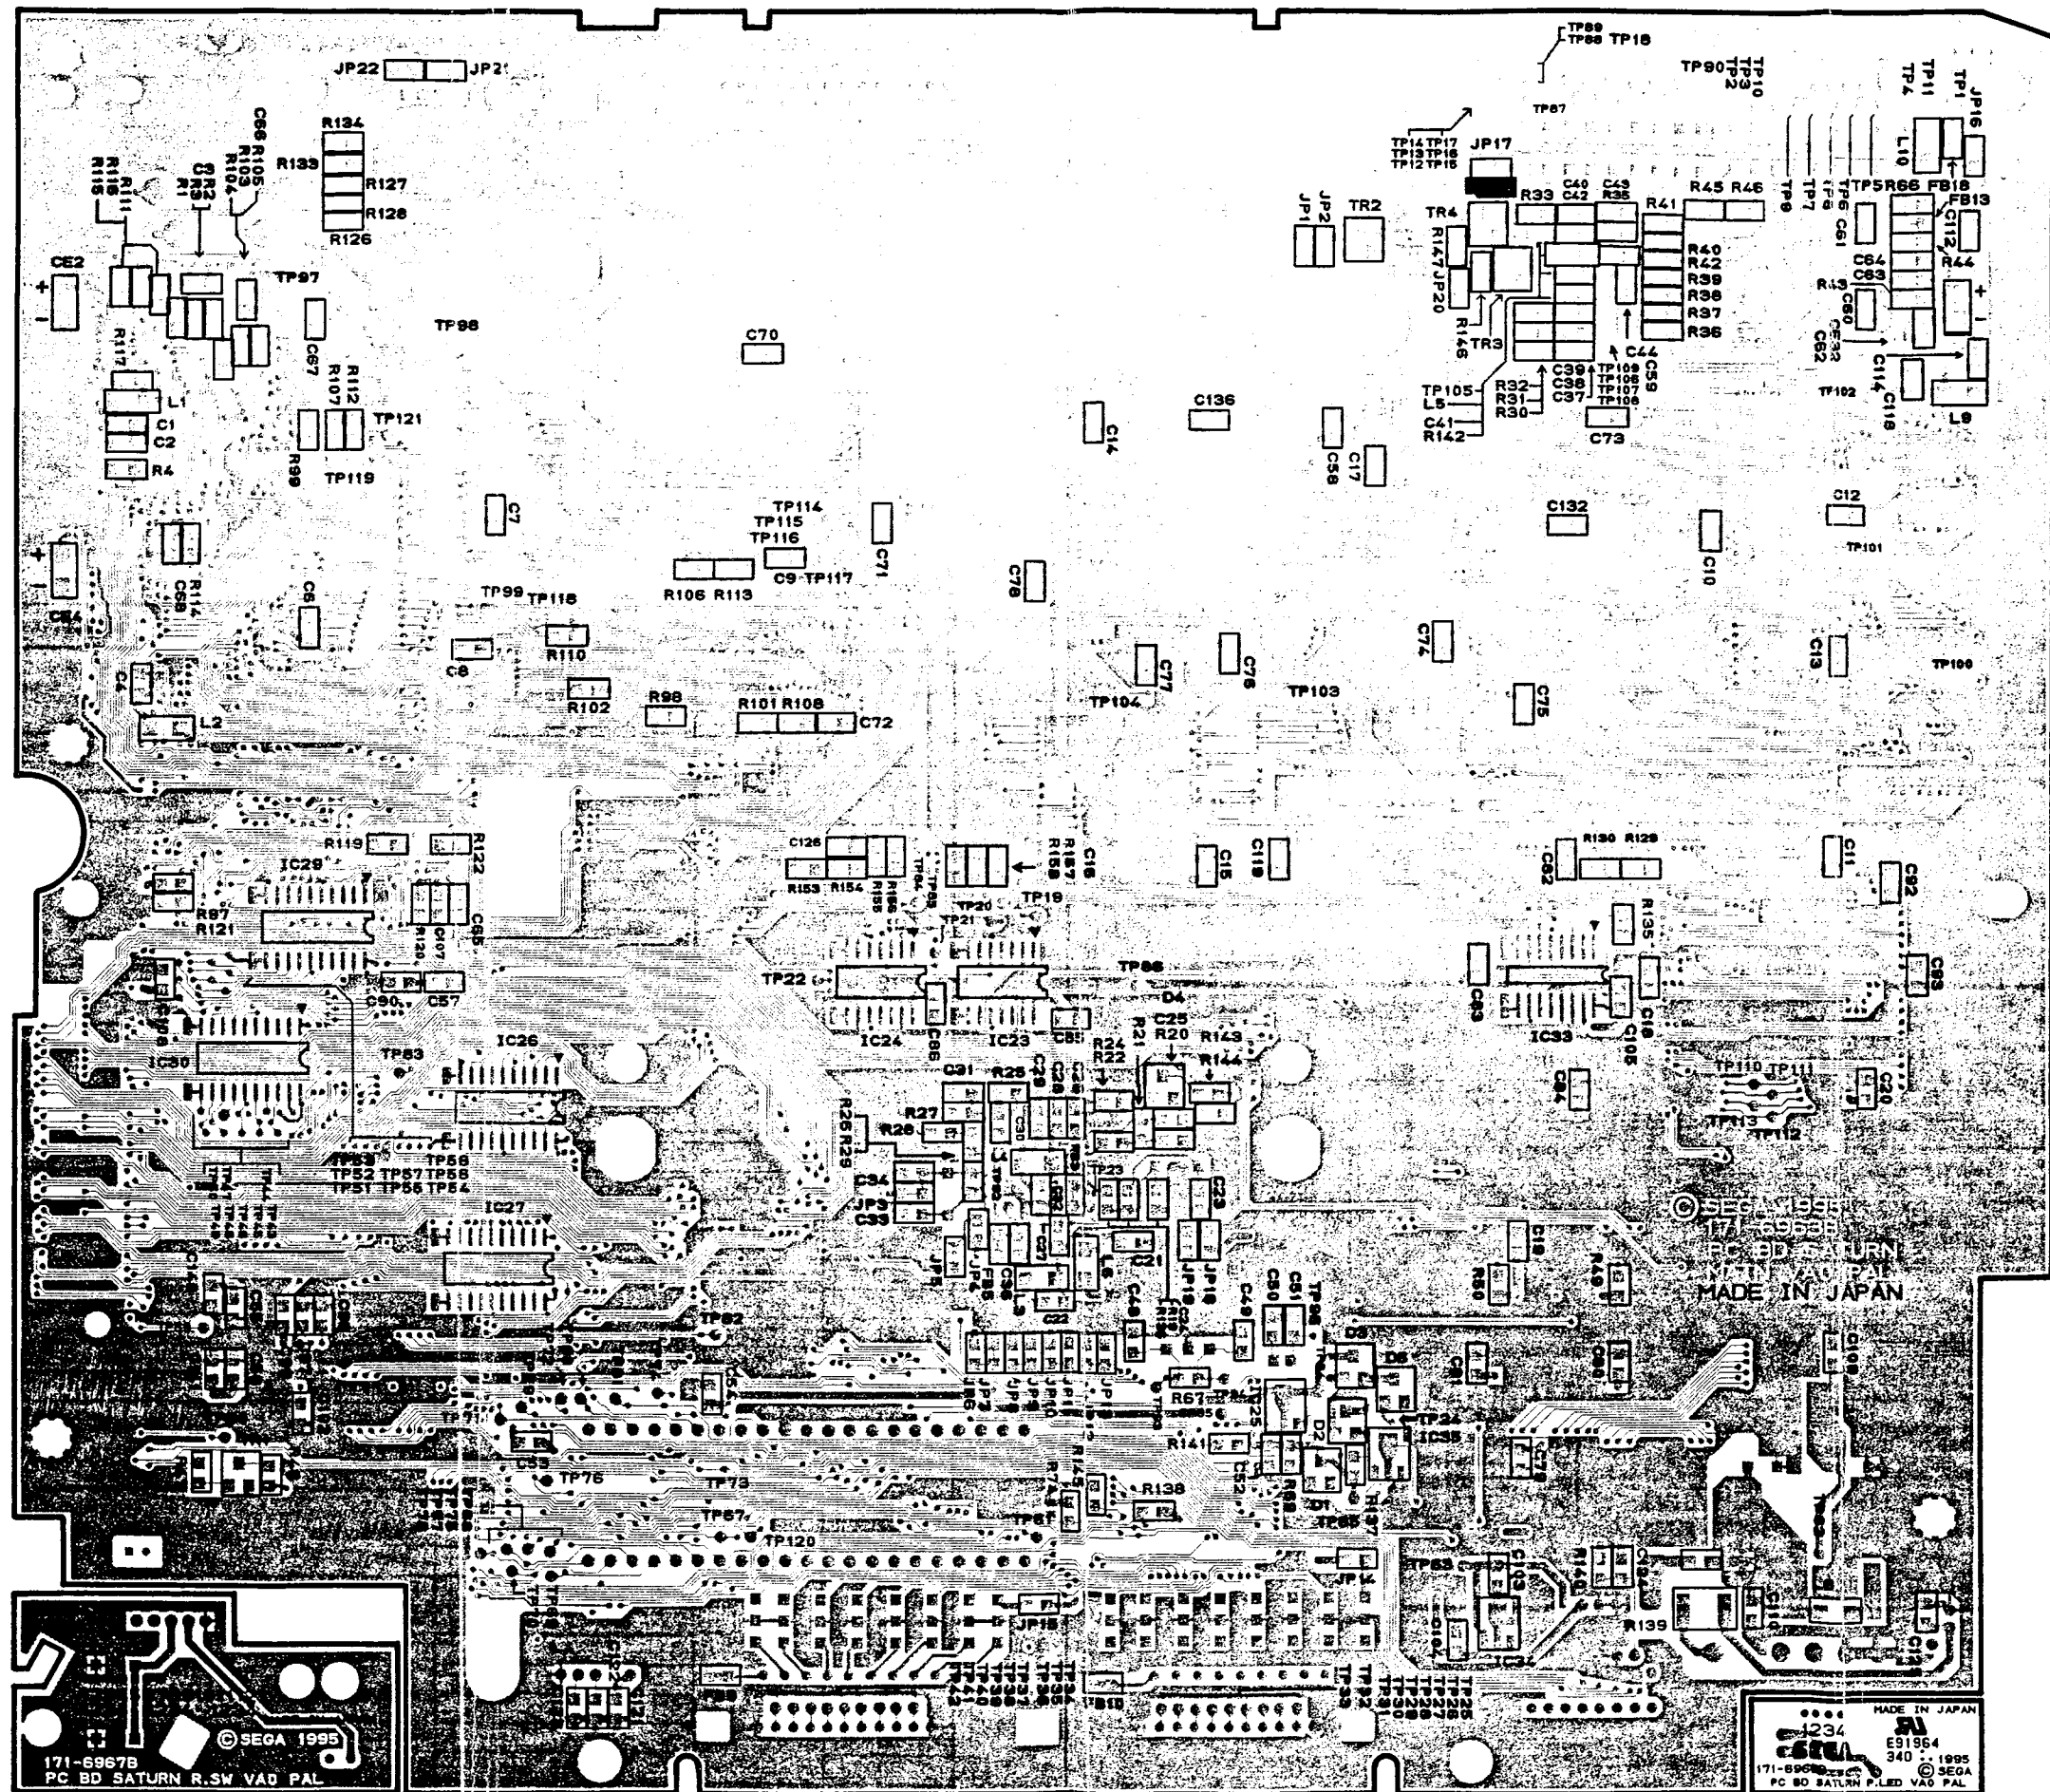

A B C D E F G H

9-2. SH-1 Circuit Board

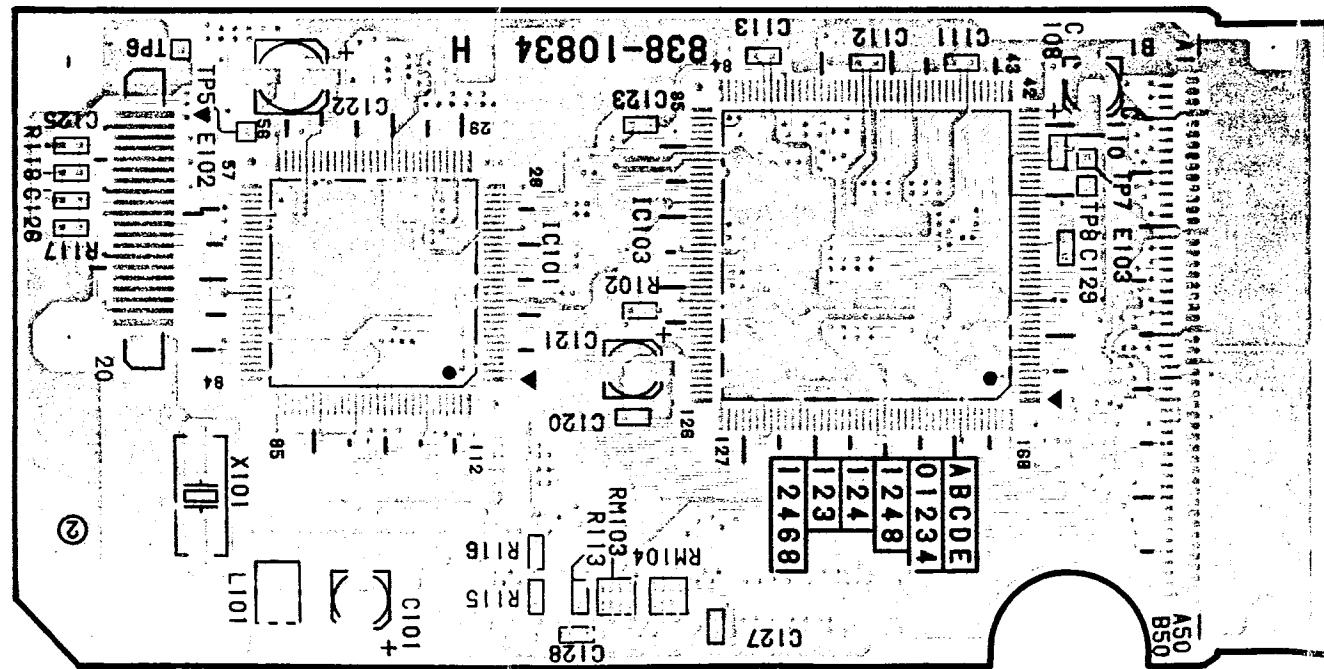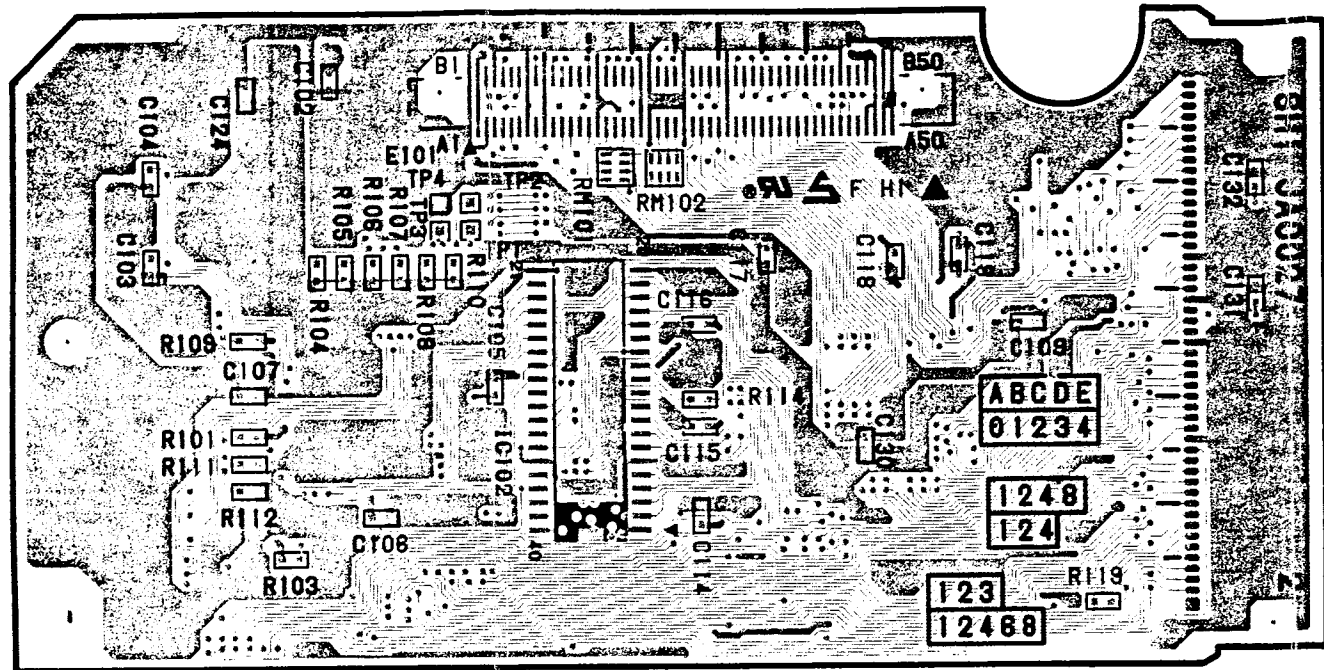


11. PARTS SPECIFICATIONS

IC1/2

IC HD6417095F28 QFP HITACHI
Parts No. : 315-0922A

IC HD6417095SF28 QFR HITACHI
Parts No. : 315-0998

Top View

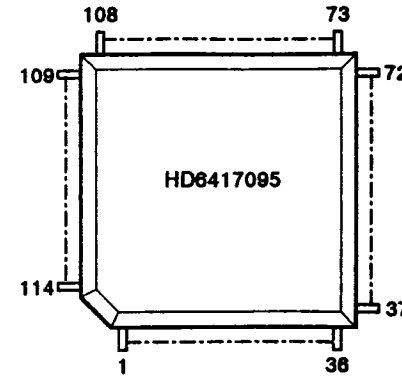


Description

| No. | I/O | Pin Name | Function | |
|-----|-----|----------|-------------------|-------------------|
| 1 | | D11 | Data bus | |
| 2 | I/O | D12 | | |
| 3 | | D13 | | |
| 4 | - | VCC1 | Power supply (5V) | |
| 5 | I/O | D14 | Data bus | |
| 6 | - | VSS1 | Power supply (0V) | |
| 7 | | D15 | Data bus | |
| 8 | | D16 | | |
| 9 | I/O | D17 | | |
| 10 | | D18 | | |
| 11 | | D19 | | |
| 12 | - | VCC2 | Power supply (5V) | |
| 13 | I/O | D20 | Data bus | |
| 14 | - | VSS2 | Power supply (0V) | |
| 15 | | D21 | Data bus | |
| 16 | I/O | D22 | | |
| 17 | | D23 | | |
| 18 | - | VCC3 | Power supply (5V) | |
| 19 | I/O | D24 | Data bus | |
| 20 | - | VSS3 | Power supply (0V) | |
| 21 | | D25 | Data bus | |
| 22 | I/O | D26 | | |
| 23 | | D27 | | |
| 24 | - | VCC4 | Power supply (5V) | |
| 25 | I/O | D28 | Data bus | |
| 26 | - | VSS4 | Power supply (0V) | |
| 27 | | D29 | Data bus | |
| 28 | I/O | D30 | | |
| 29 | | D31 | | |
| 30 | | A0 | Address bus | |
| 31 | I/O | A1 | | |
| 32 | | A2 | | |
| 33 | - | VSS5 | | Power supply (0V) |
| 34 | | A3 | | |
| 35 | | A4 | Address bus | |
| 36 | I/O | A5 | | |
| 37 | | A6 | | |
| 38 | | A7 | | |
| 39 | | A8 | | |
| 40 | - | VCC5 | Power supply (5V) | |


| No. | I/O | Pin Name | Function |
|-----|-----|-------------------|--|
| 41 | I/O | A9 | Address bus |
| 42 | - | VSS6 | Power supply (0V) |
| 43 | I/O | A10 | Address bus |
| 44 | | A11 | |
| 45 | | A12 | |
| 46 | | A13 | |
| 47 | | A14 | |
| 48 | - | VCC6 | Power supply (5V) |
| 49 | I/O | A15 | Address bus |
| 50 | - | VSS7 | Power supply (0V) |
| 51 | I/O | A16 | Address bus |
| 52 | | A17 | |
| 53 | | A18 | |
| 54 | - | VCC7 | Power supply (5V) |
| 55 | I/O | A19 | Address bus |
| 56 | - | VSS8 | Power supply (0V) |
| 57 | I/O | A20 | Address bus |
| 58 | | A21 | |
| 59 | | A22 | |
| 60 | - | VCC8 | Power supply (5V) |
| 61 | I/O | A23 | Address bus |
| 62 | - | VSS9 | Power supply (0V) |
| 63 | I/O | A24 | Address bus |
| 64 | | A25 | |
| 65 | | A26 | |
| 66 | O | DACK0 | DMAC0 acknowledge |
| 67 | - | VCC9 | Power supply (5V) |
| 68 | O | DACK1 | DMAC1 acknowledge |
| 69 | - | VSS10 | Power supply (0V) |
| 70 | I | DREQ0 | DMAC0 request |
| 71 | I | DREQ1 | DMAC1 request |
| 72 | O | CS0 | Chip select 0 |
| 73 | O | CS1 | Chip select 1 |
| 74 | O | CS2 | Chip select 2 |
| 75 | O | CS3 | Chip select 3 |
| 76 | I/O | BS | Bus cycle start |
| 77 | I/O | RD/WR | Read/write |
| 78 | - | VSS11 | Power supply (0V) |
| 79 | O | RAS, CE | RAS for DRAM/SDRAM, CE for PSRAM |
| 80 | O | CAS, OE | CAS for SDRAM/OE for PSRAM |
| 81 | O | CASHH, DMUU, WE3 | Each memory most significant byte select signal |
| 82 | O | CASHL, DMUL, WE2 | Each memory 2nd significant byte select signal |
| 83 | O | CASLH, DWMLU, WE1 | Each memory 3rd significant byte select signal |
| 84 | - | VCC10 | Power supply (5V) |
| 85 | O | CASLL, DQMLL, WE0 | Each memory least significant byte select signal |
| 86 | - | VSS12 | Power supply (0V) |
| 87 | O | RD | Read pulse |
| 88 | O | CKE | SDRAM clock enable control |
| 89 | I | WAIT | Hardware wait request |
| 90 | O | BEN | Reserve |
| 91 | - | VSS13 | Power supply (0V) |
| 92 | I | BACK, BRLS | Bus right permission in slave mode/Bus right acknowledge in master mode. |
| 93 | O | BREQ, BGR | Bus right request in slave mode/Bus right acknowledge in master mode |
| 94 | O | WDTOVF | Watch dog timer output |
| 95 | O | FTOB | Free-running timer output B |
| 96 | - | VCC11 | Power supply (5V) |
| 97 | O | FTOA | Free-running timer output A |
| 98 | - | VSS14 | Power supply (0V) |
| 99 | I | FTI | Free-running timer input |
| 100 | I | FTCI | Free-running timer clock input |
| 101 | I | RXD | Serial data input |
| 102 | O | TXD | Serial data output |
| 103 | I/O | SCK | Serial clock input/output |

| No. | I/O | Pin Name | Function |
|-----|-----|------------|---|
| 104 | – | VCC(PLL)12 | Power supply (5V) of built-in PLL |
| 105 | I | MD0 | Operation mode pin |
| 106 | – | VSS(PLL)15 | Power supply (0V) of built-in PLL |
| 107 | I | MD1 | Operation mode pin |
| 108 | O | CAP1 | External capacitor connection pin for PLL |
| 109 | | CAP2 | |
| 110 | I | MD2 | Operation mode pin |
| 111 | O | CKPACKN | Clock pause acknowledge output |
| 112 | I | CKPREON | Clock pause request input |
| 113 | – | VCC13 | Power supply (5V) |
| 114 | – | N.C | Not connected. |
| 115 | – | VSS16 | Power supply (0V) |
| 116 | – | N.C | Not connected. |
| 117 | I | MD3 | Operation mode pin |
| 118 | I/O | CKIO | System clock input/output |
| 119 | I | MD4 | Operation mode pin |
| 120 | | MD5 | |
| 121 | – | VSS17 | Power supply (0V) |
| 122 | I | RES | Reset |
| 123 | – | VCC14 | Power supply (5V) |
| 124 | O | IVECF | Interrupt vector fetch cycle |
| 125 | I | NMI | Non-maskable interrupt request |
| 126 | I | IRL3 | External interrupt factor input |
| 127 | | IRL2 | |
| 128 | | IRL1 | |
| 129 | | IRL0 | |
| 130 | I/O | D0 | Data bus |
| 131 | | D1 | |
| 132 | – | VCC15 | Power supply (5V) |
| 133 | I/O | D2 | Data bus |
| 134 | – | VSS18 | Power supply (0V) |
| 135 | I/O | D3 | Data bus |
| 136 | | D4 | |
| 137 | | D5 | |
| 138 | | D6 | |
| 139 | – | VCC16 | Power supply (5V) |
| 140 | I/O | D7 | Data bus |
| 141 | – | VSS19 | Power supply (0V) |
| 142 | I/O | D8 | Data bus |
| 143 | | D9 | |
| 144 | | D10 | |

■ Block Diagram

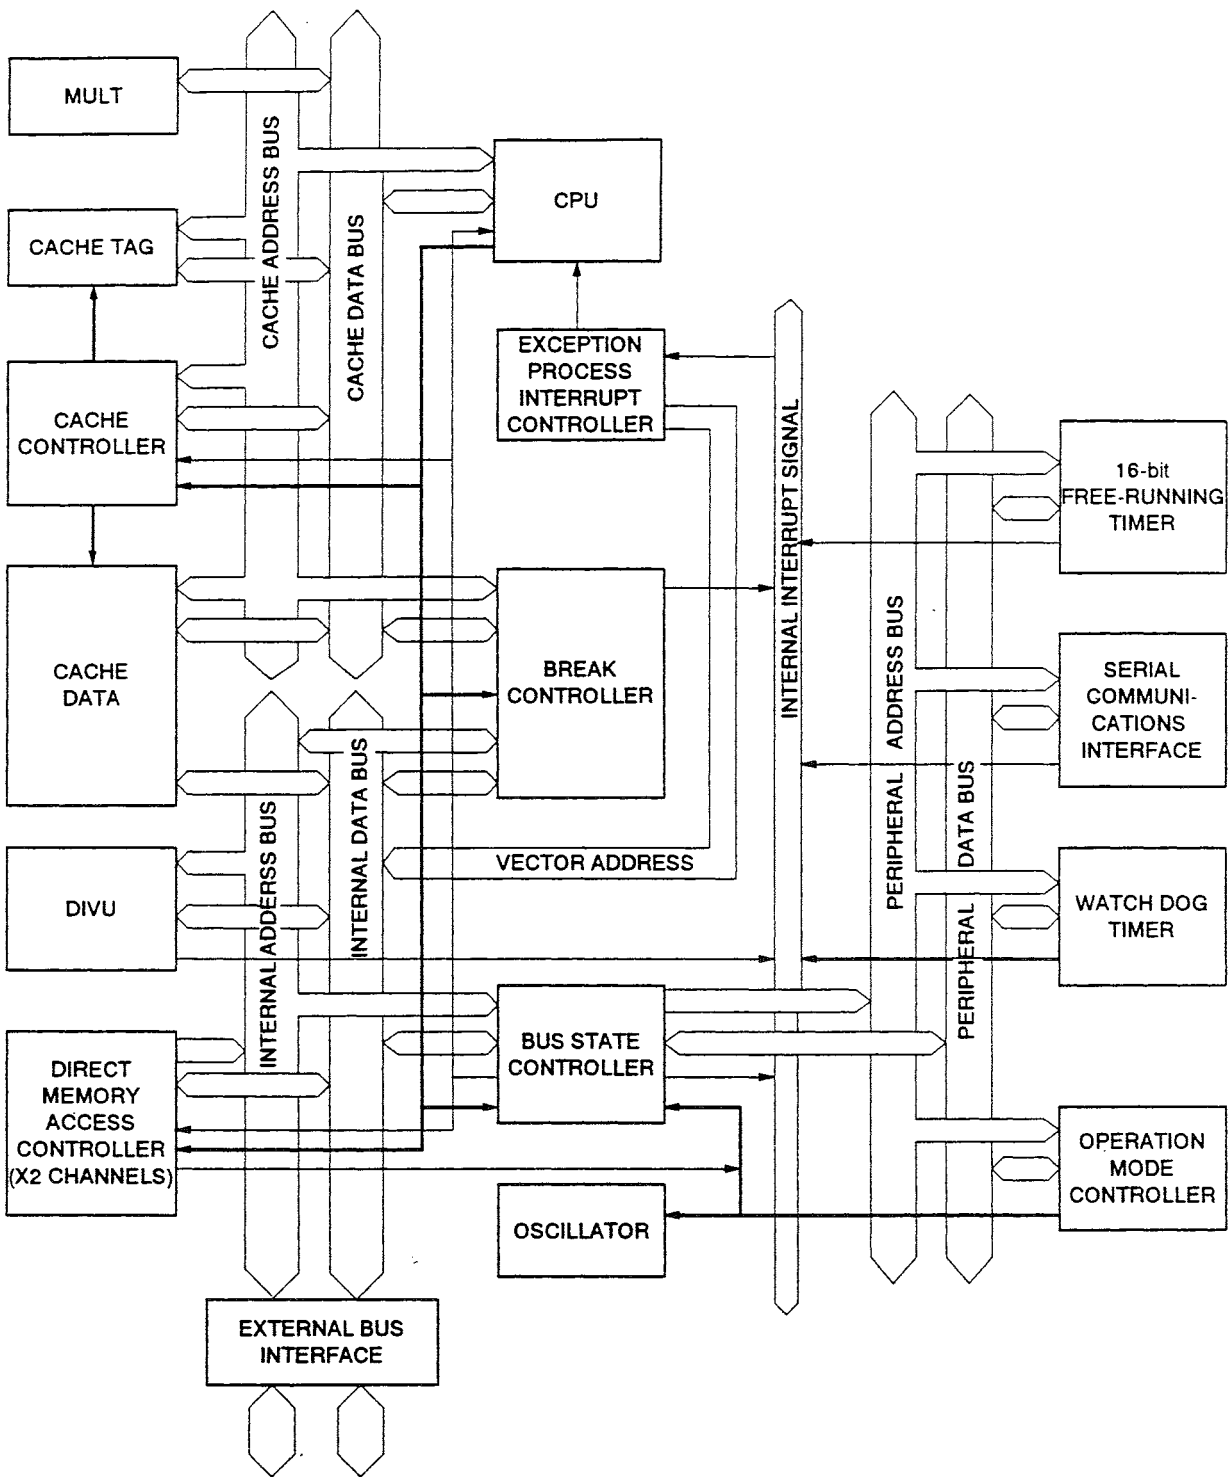


■ Top View & Pin Layout

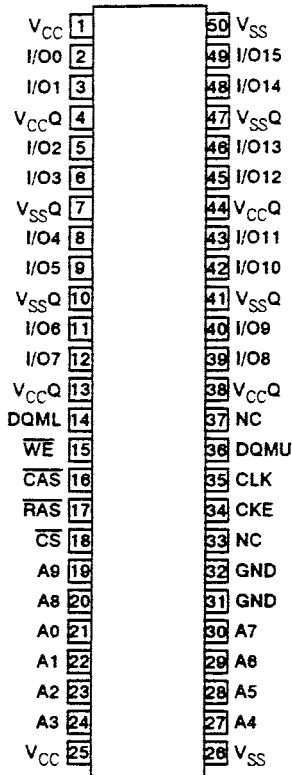

■ Pin Name

| Pin Name | Function |
|-------------------|---|
| A0-A9 | Address inputs Row addresses A0-A8 Column addresses A0-A7 Bank select address A9 |
| I/O0-I/O15 | Data inputs/outputs |
| \overline{CS} | Chip select |
| \overline{RAS} | Row address strobe command |
| \overline{CAS} | Column address strobe command |
| \overline{WE} | Write enable |
| DQMU | High-order byte input/output mask |
| DQML | Low-order byte input/output mask |
| CLK | Clock input |
| CKE | Clock enable |
| V _{CC} | Power supply |
| V _{SS} | Ground |
| V _{CC} Q | Power supply of I/O pins |
| V _{SS} Q | Ground of I/O pins |
| NC | Not connected |

■ Block Diagram

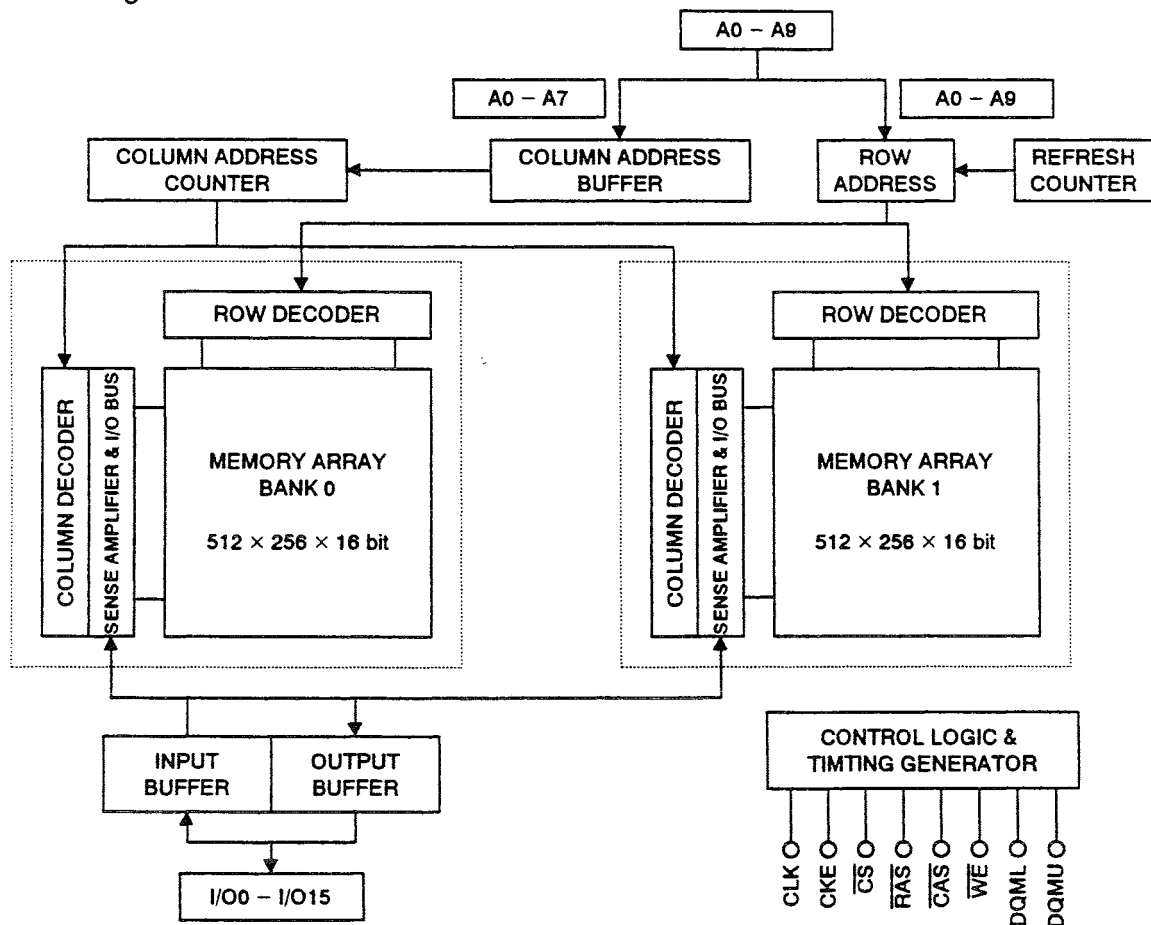


IC5 SCU (Custom Gate Array)


IC CUSTOM CHIP SCU QFP

Parts No. : 315-5688

Top View

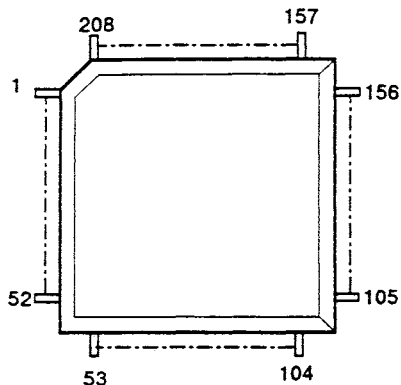

Block Diagram

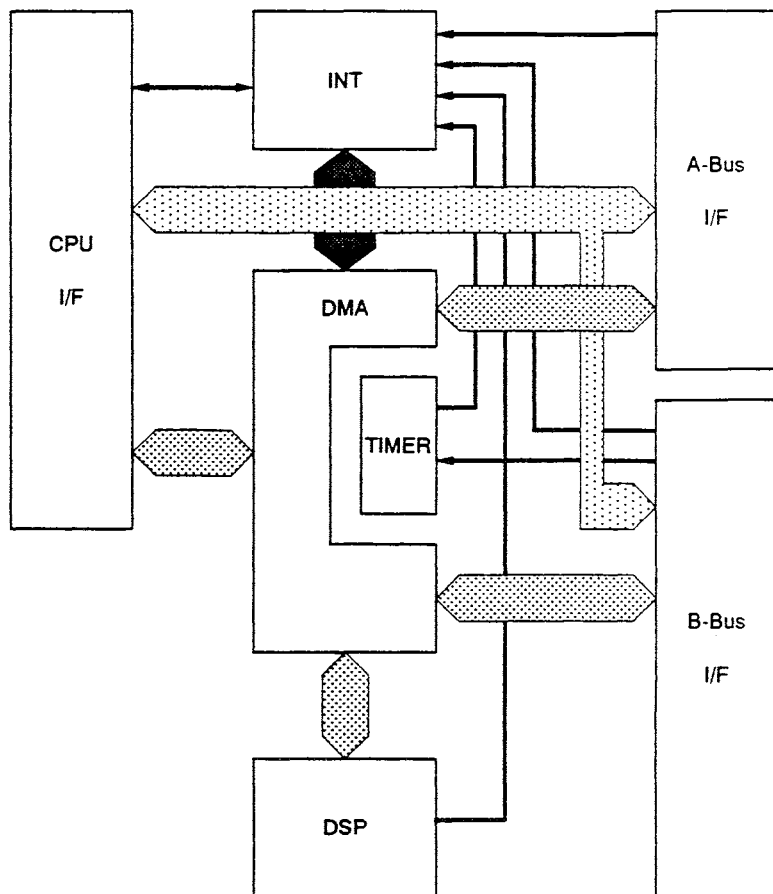

Description

| No. | I/O | Name | Function |
|-----|-----|------|---------------------|
| 1 | - | VSS | GND |
| 2 | I/O | AD4 | A-bus data bit 4 |
| 3 | I/O | AD5 | A-bus data bit 5 |
| 4 | I/O | AD6 | A-bus data bit 6 |
| 5 | I/O | AD7 | A-bus data bit 7 |
| 6 | I/O | AD8 | A-bus data bit 8 |
| 7 | I/O | AD9 | A-bus data bit 9 |
| 8 | I/O | AD10 | A-bus data bit 10 |
| 9 | - | VDD | Power supply +5V |
| 10 | I/O | AD11 | A-bus data bit 11 |
| 11 | - | VSS | GND |
| 12 | I/O | AD12 | A-bus data bit 12 |
| 13 | I/O | AD13 | A-bus data bit 13 |
| 14 | I/O | AD14 | A-bus data bit 14 |
| 15 | I/O | AD15 | A-bus data bit 15 |
| 16 | O | AA0 | A-bus address bit 0 |
| 17 | O | AA1 | A-bus address bit 1 |
| 18 | O | AA2 | A-bus address bit 2 |
| 19 | - | VSS | GND |
| 20 | O | AA3 | A-bus address bit 3 |
| 21 | - | VDD | Power supply +5V |
| 22 | O | AA4 | A-bus address bit 4 |

| No. | I/O | Pin Name | Function |
|-----|-----|----------|---|
| 23 | O | AA5 | A-bus address bit 5 |
| 24 | O | AA6 | A-bus address bit 6 |
| 25 | O | AA7 | A-bus address bit 7 |
| 26 | O | AA8 | A-bus address bit 8 |
| 27 | - | VSS | GND |
| 28 | O | AA9 | A-bus address bit 9 |
| 29 | O | AA10 | A-bus address bit 10 |
| 30 | O | AA11 | A-bus address bit 11 |
| 31 | - | VDD | Power supply +5V |
| 32 | O | AA12 | A-bus address bit 12 |
| 33 | O | AA13 | A-bus address bit 13 |
| 34 | O | AA14 | A-bus address bit 14 |
| 35 | - | VSS | GND |
| 36 | O | AA15 | A-bus address bit 15 |
| 37 | O | AA16 | A-bus address bit 16 |
| 38 | O | AA17 | A-bus address bit 17 |
| 39 | O | AA18 | A-bus address bit 18 |
| 40 | O | AA19 | A-bus address bit 19 |
| 41 | - | VDD | Power supply +5V |
| 42 | O | AA20 | A-bus address bit 20 |
| 43 | - | VSS | GND |
| 44 | O | AA21 | A-bus address bit 21 |
| 45 | O | AA22 | A-bus address bit 22 |
| 46 | O | AA23 | A-bus address bit 23 |
| 47 | O | AA24 | A-bus address bit 24 |
| 48 | O | AFC0 | A-bus function code bit 0 |
| 49 | O | AFC1 | A-bus function code bit 1 |
| 50 | O | AAS | A-bus address strobe |
| 51 | O | ACS0 | A-bus chip select 0 |
| 52 | - | VSS | GND |
| 53 | O | ACS1 | A-bus chip select 1 |
| 54 | O | ACS2 | A-bus chip select 2 |
| 55 | - | VDD | Power supply +5V |
| 56 | I | AWAIT | A-bus external wait |
| 57 | I | AIRQ | A-bus external interrupt factor |
| 58 | I | TEST | Test mode selection (normally, input "H") |
| 59 | O | ARD | A-bus read pulse |
| 60 | O | AWRU | A-bus byte 0 (AD15-8) write pulse |
| 61 | O | AWRL | A-bus byte 1 (AD7-0) write pulse |
| 62 | - | VSS | GND |
| 63 | O | ATIM0 | A-bus external access timing 0 |
| 64 | O | ATIM1 | A-bus external access timing 1 |
| 65 | O | ATIM2 | A-bus external access timing 2 |
| 66 | I/O | BD0 | B-bus address/data bit 0 |
| 67 | I/O | BD1 | B-bus address/data bit 1 |
| 68 | I/O | BD2 | B-bus address/data bit 2 |
| 69 | - | VDD | Power supply +5V |
| 70 | I/O | BD3 | B-bus address/data bit 3 |
| 71 | - | VSS | GND |
| 72 | I/O | BD4 | B-bus address/data bit 4 |
| 73 | I/O | BD5 | B-bus address/data bit 5 |
| 74 | I/O | BD6 | B-bus address/data bit 6 |
| 75 | I/O | BD7 | B-bus address/data bit 7 |
| 76 | I/O | BD8 | B-bus address/data bit 8 |
| 77 | I/O | BD9 | B-bus address/data bit 9 |
| 78 | I/O | BD10 | B-bus address/data bit 10 |
| 79 | - | VDD | Power supply +5V |
| 80 | I/O | BD11 | B-bus address/data bit 11 |
| 81 | - | VSS | GND |
| 82 | I/O | BD12 | B-bus address/data bit 12 |
| 83 | I/O | BD13 | B-bus address/data bit 13 |
| 84 | I/O | BD14 | B-bus address/data bit 14 |

| No. | I/O | Pin Name | Function ₂ |
|-----|-----|---------------------------|-------------------------------------|
| 85 | I/O | BD15 | B-bus address/data bit 15 |
| 86 | I | $\overline{\text{IROL}}$ | Light pen interrupt |
| 87 | I | $\overline{\text{IRQV}}$ | VDP2•V blank interrupt |
| 88 | I | $\overline{\text{IRQH}}$ | VDP2•H blank interrupt |
| 89 | I | $\overline{\text{BRDY2}}$ | VDP2 data ready |
| 90 | O | $\overline{\text{BCS2}}$ | VDP2 chip select |
| 91 | O | $\overline{\text{BADDT}}$ | B-bus address/data switching signal |
| 92 | – | VSS | GND |
| 93 | O | $\overline{\text{BDTEN}}$ | B-bus data enable |
| 94 | – | VDD | +5V Power supply |
| 95 | O | $\overline{\text{BCSS}}$ | SCSP chip select |
| 96 | I | $\overline{\text{BRDYS}}$ | SCSP data ready |
| 97 | I | $\overline{\text{IRQS}}$ | SCSP interrupt |
| 98 | O | $\overline{\text{BCS1}}$ | VDP1 chip select |
| 99 | I | $\overline{\text{BRDY1}}$ | VDP1 data ready |
| 100 | I | $\overline{\text{IRQ1}}$ | VDP1 interrupt |
| 101 | I/O | CA0 | C-bus address bit 0 |
| 102 | I/O | CA1 | C-bus address bit 1 |
| 103 | I/O | CA2 | C-bus address bit 2 |
| 104 | – | VSS | GND |
| 105 | – | VDD | +5V Power supply |
| 106 | I/O | CA3 | C-bus address bit 3 |
| 107 | I/O | CA4 | C-bus address bit 4 |
| 108 | I/O | CA5 | C-bus address bit 5 |
| 109 | I/O | CA6 | C-bus address bit 6 |
| 110 | – | VSS | GND |
| 111 | I/O | CA7 | C-bus address bit 7 |
| 112 | I/O | CA8 | C-bus address bit 8 |
| 113 | I/O | CA9 | C-bus address bit 9 |
| 114 | I/O | CA10 | C-bus address bit 10 |
| 115 | – | VSS | GND |
| 116 | I/O | CA11 | C-bus address bit 11 |
| 117 | – | VDD | +5V Power supply |
| 118 | I/O | CA12 | C-bus address bit 12 |
| 119 | I/O | CA13 | C-bus address bit 13 |
| 120 | I/O | CA14 | C-bus address bit 14 |
| 121 | – | VSS | GND |
| 122 | I/O | CA15 | C-bus address bit 15 |
| 123 | I/O | CA16 | C-bus address bit 16 |
| 124 | I/O | CA17 | C-bus address bit 17 |
| 125 | I/O | CA18 | C-bus address bit 18 |
| 126 | I/O | CA19 | C-bus address bit 19 |
| 127 | – | VDD | +5V Power supply |
| 128 | I/O | CA20 | C-bus address bit 20 |
| 129 | – | VSS | GND |
| 130 | I/O | CA21 | C-bus address bit 21 |
| 131 | I/O | CA22 | C-bus address bit 22 |
| 132 | I/O | CA23 | C-bus address bit 23 |
| 133 | I/O | CA24 | C-bus address bit 24 |
| 134 | I/O | CD0 | C-bus data bit 0 |
| 135 | I/O | CD1 | C-bus data bit 1 |
| 136 | I/O | CD2 | C-bus data bit 2 |
| 137 | – | VSS | GND |
| 138 | I/O | CD3 | C-bus data bit 3 |
| 139 | – | VDD | +5V Power supply |
| 140 | I/O | CD4 | C-bus data bit 4 |
| 141 | I/O | CD5 | C-bus data bit 5 |
| 142 | I/O | CD6 | C-bus data bit 6 |
| 143 | I/O | CD7 | C-bus data bit 7 |
| 144 | – | VSS | GND |
| 145 | I/O | CD8 | C-bus data bit 8 |
| 146 | I/O | CD9 | C-bus data bit 9 |


| No. | I/O | Pin Name | Function |
|-----|-----|----------------------------|------------------------------------|
| 147 | I/O | CD10 | C-bus data bit 10 |
| 148 | I/O | CD11 | C-bus data bit 11 |
| 149 | - | VDD | +5V Power supply |
| 150 | I/O | CD12 | C-bus data bit 12 |
| 151 | - | VSS | GND |
| 152 | I/O | CD13 | C-bus data bit 13 |
| 153 | I/O | CD14 | C-bus data bit 14 |
| 154 | I/O | CD15 | C-bus data bit 15 |
| 155 | I/O | CD16 | C-bus data bit 16 |
| 156 | I/O | CD17 | C-bus data bit 17 |
| 157 | - | VSS | GND |
| 158 | I/O | CD18 | C-bus data bit 18 |
| 159 | I/O | CD19 | C-bus data bit 19 |
| 160 | - | VDD | +5V Power supply |
| 161 | I/O | CD20 | C-bus data bit 20 |
| 162 | I/O | CD21 | C-bus data bit 21 |
| 163 | I/O | CD22 | C-bus data bit 22 |
| 164 | - | VSS | GND |
| 165 | I/O | CD23 | C-bus data bit 23 |
| 166 | I/O | CD24 | C-bus data bit 24 |
| 167 | I/O | CD25 | C-bus data bit 25 |
| 168 | I/O | CD26 | C-bus data bit 26 |
| 169 | I/O | CD27 | C-bus data bit 27 |
| 170 | - | VDD | +5V Power supply |
| 171 | I/O | CD28 | C-bus data bit 28 |
| 172 | - | VSS | GND |
| 173 | I/O | CD29 | C-bus data bit 29 |
| 174 | I/O | CD30 | C-bus data bit 30 |
| 175 | I/O | CD31 | C-bus data bit 31 |
| 176 | I | $\overline{\text{CCS1}}$ | C-bus chip select 1 |
| 177 | I | $\overline{\text{CCS2}}$ | C-bus chip select 2 |
| 178 | O | $\overline{\text{CCS3}}$ | C-bus chip select 3 |
| 179 | - | VSS | GND |
| 180 | I | $\overline{\text{RESET}}$ | Initial reset |
| 181 | I | CLK28 | System clock |
| 182 | I/O | CRDWR | C-bus read/write |
| 183 | I | $\overline{\text{CRD}}$ | C-bus read pulse |
| 184 | - | VDD | +5V Power supply |
| 185 | I/O | $\overline{\text{CDQMUU}}$ | SDRAM byte 0 (CD31-24) write pulse |
| 186 | I/O | $\overline{\text{CDQMUL}}$ | SDRAM byte 1 (CD23-16) write pulse |
| 187 | I/O | $\overline{\text{CDQMLU}}$ | SDRAM byte 2 (CD15-8) write pulse |
| 188 | I/O | $\overline{\text{CDQMLL}}$ | SDRAM byte 3 (CD7-0) write pulse |
| 189 | - | VSS | GND |
| 190 | O | $\overline{\text{RAS}}$ | SDRAM RAS |
| 191 | O | $\overline{\text{CAS}}$ | SDRAM CAS |
| 192 | O | $\overline{\text{CWAIT}}$ | C-bus external wait |
| 193 | - | VDD | +5V Power supply |
| 194 | I | $\overline{\text{CIVECF}}$ | C-bus interrupt vector fetch cycle |
| 195 | O | $\overline{\text{CIRL0}}$ | C-bus external interrupt factor 0 |
| 196 | O | $\overline{\text{CIRL1}}$ | C-bus external interrupt factor 1 |
| 197 | O | $\overline{\text{CIRL2}}$ | C-bus external interrupt factor 2 |
| 198 | O | $\overline{\text{CIRL3}}$ | C-bus external interrupt factor 3 |
| 199 | - | VSS | GND |
| 200 | O | $\overline{\text{CBREQ}}$ | C-bus right request |
| 201 | I | $\overline{\text{CBACK}}$ | C-bus right acknowledge |
| 202 | I | $\overline{\text{MIREQ}}$ | System manager interrupt |
| 203 | O | AA25 | A-bus address bit 25 |
| 204 | I/O | AD0 | A-bus data bit 0 |
| 205 | I/O | AD1 | A-bus data bit 1 |
| 206 | I/O | AD2 | A-bus data bit 2 |
| 207 | I/O | AD3 | A-bus data bit 3 |
| 208 | - | VDD | +5V Power supply |

IC6 DCC

IC CUSTOM CHIP DCC QFP

Parts No. : 315-5778

Top View

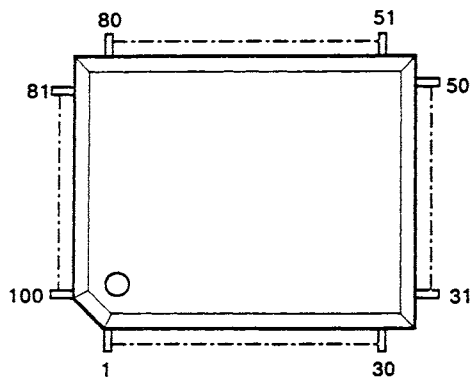

Pin Name

| No. | I/O | Name |
|-----|-----|---------------------------|
| 1 | I | TEST1 |
| 2 | O | TEST0 |
| 3 | O | BEN |
| 4 | O | BDIR |
| 5 | - | VSS |
| 6 | O | DA0 |
| 7 | O | DA1 |
| 8 | O | DA2 |
| 9 | O | DA3 |
| 10 | O | DA4 |
| 11 | O | DA5 |
| 12 | O | DA6 |
| 13 | O | DA7 |
| 14 | O | DA8 |
| 15 | - | VSS |
| 16 | - | VDD |
| 17 | O | $\overline{\text{DRAS0}}$ |
| 18 | O | $\overline{\text{DRAS1}}$ |
| 19 | O | $\overline{\text{DRAS2}}$ |
| 20 | O | $\overline{\text{DRAS3}}$ |
| 21 | O | $\overline{\text{DUCAS}}$ |
| 22 | O | $\overline{\text{DLCAS}}$ |
| 23 | O | $\overline{\text{DWE}}$ |
| 24 | O | $\overline{\text{DOE}}$ |
| 25 | - | VSS |
| 26 | - | VDD |
| 27 | I | A1 |
| 28 | I | A2 |
| 29 | I | A3 |
| 30 | I | A4 |
| 31 | I | A5 |
| 32 | I | A6 |
| 33 | I | A7 |
| 34 | I | A8 |

| No. | I/O | Name |
|-----|-----|---------------------------|
| 35 | I | A9 |
| 36 | I | A10 |
| 37 | I | A11 |
| 38 | I | A12 |
| 39 | I | A13 |
| 40 | - | VSS |
| 41 | - | VDD |
| 42 | I | A14 |
| 43 | I | A15 |
| 44 | I | A16 |
| 45 | I | A17 |
| 46 | I | A18 |
| 47 | I | A19 |
| 48 | I | A20 |
| 49 | I | A21 |
| 50 | I | A22 |
| 51 | I | A23 |
| 52 | I | A24 |
| 53 | - | VSS |
| 54 | O | $\overline{\text{IREQ1}}$ |
| 55 | O | $\overline{\text{IREQ2}}$ |
| 56 | - | VDD |
| 57 | I | $\overline{\text{IVECF}}$ |
| 58 | I | $\overline{\text{RD/WR}}$ |
| 59 | I | $\overline{\text{RD}}$ |
| 60 | - | VSS |
| 61 | I | $\overline{\text{CS2}}$ |
| 62 | I | $\overline{\text{CS1}}$ |
| 63 | I | $\overline{\text{CS0}}$ |
| 64 | O | $\overline{\text{WAIT}}$ |
| 65 | - | VDD |
| 66 | - | VSS |
| 67 | I | $\overline{\text{WTIN}}$ |
| 68 | I | WE1 |

| No. | I/O | Name |
|-----|-----|----------------------------|
| 69 | I | WE0 |
| 70 | - | VSS |
| 71 | O | $\overline{\text{BACK}}$ |
| 72 | O | $\overline{\text{EXBACK}}$ |
| 73 | O | $\overline{\text{BRLS}}$ |
| 74 | - | VSS |
| 75 | I | $\overline{\text{BGR}}$ |
| 76 | I | $\overline{\text{BREQ}}$ |
| 77 | I | $\overline{\text{EXBREQ}}$ |
| 78 | O | MFT1 |
| 79 | O | SFT1 |
| 80 | - | VDD |
| 81 | I | CK |
| 82 | - | VSS |
| 83 | I | $\overline{\text{RESET}}$ |
| 84 | I | BS |
| 85 | I | $\overline{\text{EWT}}$ |
| 86 | O | $\overline{\text{IOCE}}$ |
| 87 | O | $\overline{\text{EXTCE0}}$ |
| 88 | O | $\overline{\text{EXTCE1}}$ |
| 89 | O | $\overline{\text{EXTCE2}}$ |
| 90 | - | VSS |
| 91 | - | VDD |
| 92 | I | $\overline{\text{HINT}}$ |
| 93 | I | $\overline{\text{VINT}}$ |
| 94 | I | $\overline{\text{DECON}}$ |
| 95 | O | $\overline{\text{ROMCE}}$ |
| 96 | O | $\overline{\text{SMPCE}}$ |
| 97 | O | $\overline{\text{SRAMCE}}$ |
| 98 | O | $\overline{\text{MOE}}$ |
| 99 | O | $\overline{\text{MWR}}$ |
| 100 | - | VSS |


IC7 IPL ROM

OS SATURN IPL-ROM PAL DIP

Parts No. : EPR-17933

Parts No. : MPR-17933

Top View & Pin Layout

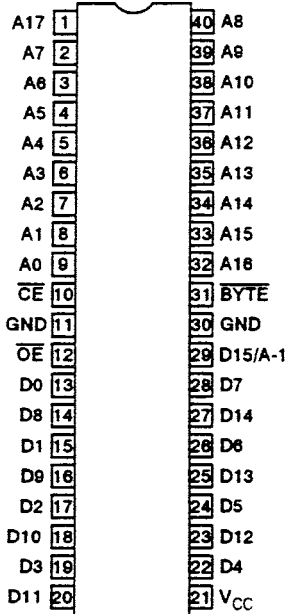

Pin Name

| | |
|-----------------|---------------------|
| A0-A17 | Address inputs |
| \overline{CE} | Chip enable |
| \overline{OE} | Output enable |
| GND | Ground |
| BYTE | |
| D0-D15 | Data inputs/outputs |
| V _{CC} | +5V power supply |

IC8 BACKUP RAM

IC CXK58267AM-10L SOP

Parts No. : 315-0948-10

IC UPD43257B-10LL SOP

Parts No. : 315-0930-10

IC M5M5255BFP-12LL SOP

Parts No. : 315-0964-10


IC SRM20257LLM10 SOP

Parts No. : 315-0965-10


IC UM62257M-70LL SOP

Parts No. : 315-1002-70

Block Diagram

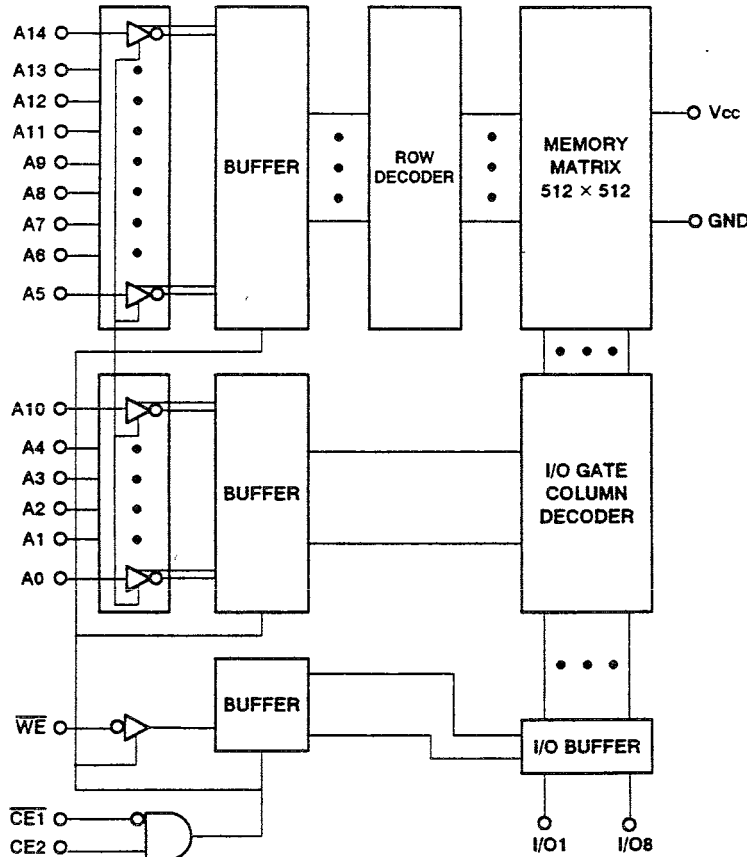

Top View & Pin Layout

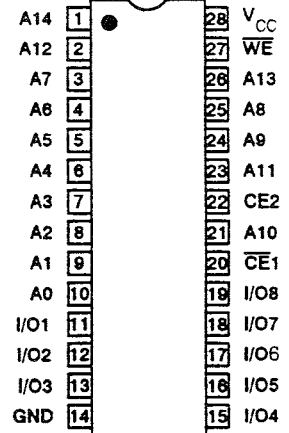

Description


| Name | Function |
|-----------------|---------------------|
| A0-A14 | Address inputs |
| I/O1-I/O8 | Data inputs/outputs |
| CE1, CE2 | Chip enable inputs |
| WE | Write enable input |
| V _{CC} | +5V power supply |
| GND | Ground |

IC9 SMPC

IC CUSTOM CHIP SMPC QFP

Parts No. : 315-5744

Top View

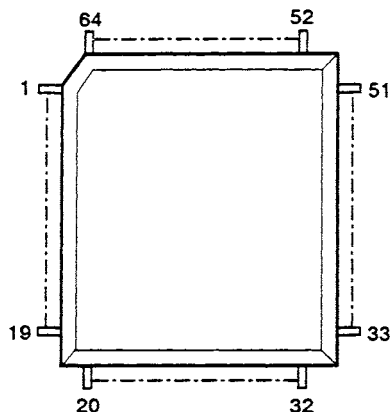

Description

| No. | I/O | Name | Function |
|-----|-----|---------------------------|----------------------------|
| 1 | - | R70 | Not connected. |
| 2 | | R71 | |
| 3 | I/O | R72 | Reset control |
| 4 | | R73 | |
| 5 | I | R50 | Jumper configuration input |
| 6 | | R51 | |
| 7 | | R52 | |
| 8 | | R53 | |
| 9 | - | TEST | Not connected → GND |
| 10 | I/O | OSC1 | Clock 3 |
| 11 | | OSC2 | |
| 12 | - | GND | Ground |
| 13 | I/O | X2 | Clock 4 |
| 14 | | X1 | |
| 15 | | $\overline{\text{RESET}}$ | Master reset input |
| 16 | - | VCC | Power |
| 17 | I | $\overline{\text{CS}}$ | Chip select input |
| 18 | I | R/ $\overline{\text{W}}$ | Read/write input |
| 19 | I/O | A1 | Address bus |
| 20 | | A2 | |
| 21 | | A3 | |
| 22 | | A4 | |
| 23 | | A5 | |
| 24 | | A6 | |
| 25 | I/O | DB0 | Data bus |
| 26 | | DB1 | |
| 27 | | DB2 | |
| 28 | | DB3 | |
| 29 | | DB4 | |
| 30 | | DB5 | |
| 31 | | DB6 | |
| 32 | | DB7 | |

| No. | I/O | Name | Function |
|-----|-------|----------|--------------------------|
| 33 | I/O | PIO0A | Control pad |
| 34 | | PIO1A | |
| 35 | | PIO2A | |
| 36 | | PIO3A | |
| 37 | | PIO4A | |
| 38 | | PIO5A | |
| 39 | PIO6A | | |
| 40 | I/O | PIO0B | Control pad |
| 41 | | PIO1B | |
| 42 | | PIO2B | |
| 43 | | PIO3B | |
| 44 | | PIO4B | |
| 45 | | PIO5B | |
| 46 | PIO6B | | |
| 47 | I | EXL | Input |
| 48 | I | INT0/D13 | Input |
| 49 | | INT2/RO1 | Backup RAM reset control |
| 50 | I/O | D0 | Reset control |
| 51 | | D1 | |
| 52 | - | D2 | Not connected. |
| 53 | I/O | D3 | Reset control |
| 54 | | D4 | |
| 55 | | D5 | |
| 56 | | D6 | |
| 57 | | D7 | |
| 58 | | D8 | |
| 59 | | D9 | |
| 60 | | D10 | |
| 61 | I/O | R60 | Reset control |
| 62 | | R61 | |
| 63 | - | R62 | Not connected. |
| 64 | R63 | | |

IC10 VDP1


IC CUSTOM CHIP VDP1 QFP

IC CUSTOM CHIP VDP1 S QFP

Parts No. : 315-5689

Parts No. : 315-5883

Top View

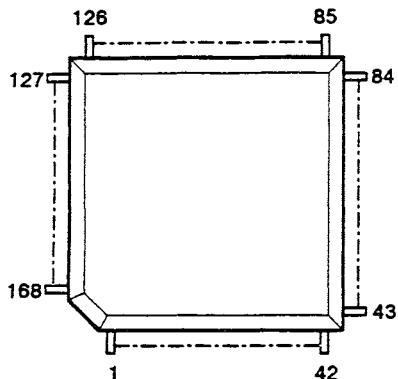

Description

| No. | I/O | Name | Function |
|-----|-----|----------------------------|-------------------------------------|
| 1 | - | NC | Not connected. |
| 2 | O | VRAMA7 | Address bus (VRAM) |
| 3 | | VRAMA8 | |
| 4 | | VRAMA9 | |
| 5 | - | VSS | Ground for I/O pin |
| 6 | O | VCLK | Clock (VRAM) |
| 7 | O | $\overline{\text{VUDQM}}$ | Upper byte input/output mask (VRAM) |
| 8 | O | $\overline{\text{VLDQM}}$ | Lowerbyte input/output mask (VRAM) |
| 9 | - | VSS | Ground for internal circuit |
| 10 | O | $\overline{\text{VCASN}}$ | Column address asserted (VRAM) |
| 11 | O | $\overline{\text{VRASN}}$ | Row address asserted (VRAM) |
| 12 | - | VCC | Power supply |
| 13 | O | $\overline{\text{VWEN}}$ | Write enable (VRAM) |
| 14 | O | $\overline{\text{VCSN}}$ | Chip select (VRAM) |
| 15 | I | MCLK | Master clock |
| 16 | - | $\overline{\text{RESETN}}$ | Reset |
| 17 | - | VSS | Ground for I/O pin |
| 18 | - | $\overline{\text{CSN}}$ | Chip select |
| 19 | - | $\overline{\text{ADN}}$ | Address/data select |
| 20 | - | $\overline{\text{DTEN}}$ | Data enable |
| 21 | O | $\overline{\text{IRON}}$ | Interrupt request |
| 22 | O | $\overline{\text{READYN}}$ | Ready |
| 23 | O | VBUS0 | Address/data bus (Syscon) |
| 24 | | VBUS1 | |
| 25 | | VBUS2 | |
| 26 | - | VSS | Ground for I/O pin |
| 27 | O | VBUS3 | Address/data bus (Syscon) |
| 28 | | VBUS4 | |
| 29 | | VBUS5 | |
| 30 | | VBUS6 | |
| 31 | | VBUS7 | |
| 32 | - | VCC | Power supply |
| 33 | O | VBUS8 | Address/data bus (Syscon) |
| 34 | | VBUS9 | |
| 35 | | VBUS10 | |
| 36 | | VBUS11 | |
| 37 | - | VSS | Ground for internal circuit |
| 38 | O | VBUS12 | Address/data bus (Syscon) |
| 39 | | VBUS13 | |
| 40 | | VBUS14 | |

| No. | I/O | Name | Function |
|-----|-----|--------|------------------------------------|
| 41 | O | VBUS15 | Address/data bus (Syscon) |
| 42 | - | NC | Not connected. |
| 43 | | NC | |
| 44 | O | FOA0 | Address bus (FB0) |
| 45 | | FOA1 | |
| 46 | | FOA2 | |
| 47 | - | VSS | Ground for I/O pin |
| 48 | O | FOA3 | Address bus (FB0) |
| 49 | O | FOA4 | Address bus |
| 50 | O | FOA5 | Frame buffer (FB0) |
| 51 | O | FOA6 | Address bus (FB0) |
| 52 | - | VCC | Power supply |
| 53 | O | FOA7 | Address bus (FB0) |
| 54 | | FOA8 | |
| 55 | | FOA9 | |
| 56 | O | FOCSN | Chip select (FB0) |
| 57 | - | VSS | Ground for internal circuit |
| 58 | O | FOWEN | Write enable (FB0) |
| 59 | O | FOCLK | Clock (FB0) |
| 60 | O | FRRASN | Row address asserted (FB0) |
| 61 | O | FOCASN | Column address asserted (FB0) |
| 62 | O | FOLDQM | Lower byte input/output mask (FB0) |
| 63 | O | FOUDQM | Upper byte input/output mask (FB0) |
| 64 | - | VSS | Ground for I/O pin |
| 65 | O | F0D0 | Data bus (FB0) |
| 66 | | F0D1 | |
| 67 | | F0D2 | |
| 68 | | F0D3 | |
| 69 | | F0D4 | |
| 70 | - | VSS | Ground for internal circuit |
| 71 | O | F0D5 | Data bus (FB0) |
| 72 | | F0D6 | |
| 73 | | F0D7 | |
| 74 | | F0D8 | |
| 75 | - | VCC | Power supply |
| 76 | O | F0D9 | Data bus (FB0) |
| 77 | | F0D10 | |
| 78 | | F0D11 | |
| 79 | | F0D12 | |
| 80 | - | VSS | Ground for I/O pin |
| 81 | O | F0D13 | Data bus (FB0) |
| 82 | | F0D14 | |
| 83 | | F0D15 | |
| 84 | - | NC | Not connected. |
| 85 | | NC | |
| 86 | O | F1D0 | Data bus (FB1) |
| 87 | | F1D1 | |
| 88 | | F1D2 | |
| 89 | - | VSS | Ground for I/O pin |
| 90 | O | F1D3 | Data bus (FB1) |
| 91 | | F1D4 | |
| 92 | | F1D5 | |
| 93 | | F1D6 | |
| 94 | - | VCC | Power supply |
| 95 | O | F1D7 | Data bus (FB1) |
| 96 | | F1D8 | |
| 97 | | F1D9 | |
| 98 | | F1D10 | |
| 99 | - | VSS | Ground for internal circuit |
| 100 | O | F1D11 | Data bus (FB1) |
| 101 | | F1D12 | |
| 102 | | F1D13 | |
| 103 | | F1D14 | |
| 104 | | F1D15 | |

| No. | I/O | Name | Function |
|-----|-----|---------|---|
| 105 | - | VSS | Ground for I/O pin |
| 106 | O | F1CLK | Clock (FB1) |
| 107 | O | F1CSN | Chip select (FB1) |
| 108 | O | F1WEN | Write enable (FB1) |
| 109 | O | F1RASN | Row address asserted (FB1) |
| 110 | O | F1CASN | Column address asserted (FB1) |
| 111 | O | F1LDM | Lower byte input/output mask (FB1) |
| 112 | - | VSS | Data bus (FB1) |
| 113 | O | F1UDOM | Lower byte input/output mask (FB1) |
| 114 | O | F1A0 | Address bus (FB1) |
| 115 | | F1A1 | |
| 116 | | F1A2 | |
| 117 | - | VCC | Power supply |
| 118 | O | F1A3 | Address bus (FB1) |
| 119 | | F1A4 | |
| 120 | | F1A5 | |
| 121 | O | F1A6 | Address bus (FB1) |
| 122 | - | VSS | Ground for I/O pin |
| 123 | O | F1A7 | Address bus (BF1) |
| 124 | O | F1A8 | |
| 125 | O | F1A9 | |
| 126 | - | NC | Not connected. |
| 127 | | | |
| 128 | - | HTIMN | Horizontal sync timing |
| 129 | - | VTIMN | Vertical sync timing |
| 130 | O | V2CLK | Video clock (1/2 MCLK) |
| 131 | - | VSS | Ground for I/O pin |
| 132 | O | VOUT0 | Display start address/video data |
| 133 | O | VOUT1 | |
| 134 | O | VOUT2 | |
| 135 | O | VOUT3 | |
| 136 | - | VCC | Power supply |
| 137 | O | VOUT4 | Display start address/video output data |
| 138 | O | VOUT5 | Video output data |
| 139 | O | VOUT6 | |
| 140 | O | VOUT7 | |
| 141 | - | VSS | Ground for internal circuit |
| 142 | O | VRAMD0 | VRAM data bus |
| 143 | O | VRAMD1 | |
| 144 | O | VRAMD2 | |
| 145 | O | VRAMD3 | |
| 146 | O | VRAMD4 | |
| 147 | - | VSS | Ground for I/O pin |
| 148 | O | VRAMD5 | VRAM data bus |
| 149 | O | VRAMD6 | |
| 150 | O | VRAMD7 | |
| 151 | O | VRAMD8 | |
| 152 | O | VRAMD9 | |
| 153 | O | VRAMD10 | |
| 154 | - | VSS | Ground for internal circuit |
| 155 | O | VRAMD11 | VRAM data bus |
| 156 | O | VRAMD12 | |
| 157 | O | VRAMD13 | |
| 158 | O | VRAMD14 | |
| 159 | - | VCC | Power supply |
| 160 | O | VRAMD15 | VRAM data bus |
| 161 | O | VRAMA0 | VRAM address bus |
| 162 | O | VRAMA1 | |
| 163 | O | VRAMA2 | |
| 164 | O | VRAMA3 | |
| 165 | O | VRAMA4 | |
| 166 | O | VRAMA5 | |
| 167 | O | VRAMA6 | |
| 168 | - | NC | Not connected. |


IC12/13/15/16

IC UPD4502161G5-A12 TSOP NEC
Parts No. : 315-0910-12

IC HM5221605TT-17 TSOP HITACHI
Parts No. : 315-1017-17

IC LC382161T-17 TSOP SANYO
Parts No. : 315-1012-17

Top View & Pin Layout

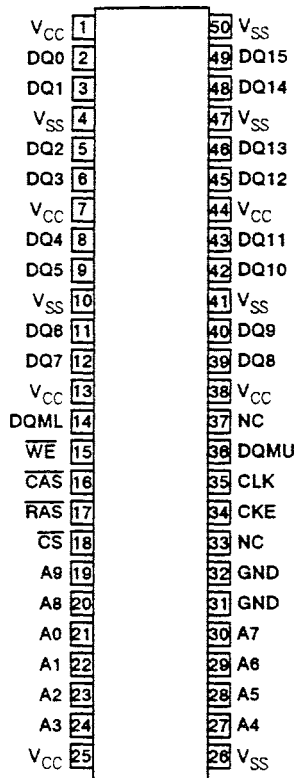

Pin Name

| | |
|-----------------------|------------------------------|
| A0-A9 | Address inputs |
| DQ0-DQ5 | Data inputs/outputs |
| CLK | System clock input |
| CKE | Clock enable |
| \overline{CS} | Chip select |
| \overline{RAS} | Row address strobe command |
| \overline{CAS} | Col / address strobe command |
| \overline{WE} | Write enable |
| DQML, DQMU | DQ mask enable |
| V _{CC} | Supply voltage |
| V _{SS} , GND | Ground |
| NC | No connection |

Description

| No. | I/O | Pin Name | Function |
|--|-----|---|--|
| 1, 7, 13, 25, 38, 44, 50 | - | VCC | Power supply of internal circuits. |
| 4, 10, 26, 41, 47, 50 | - | VSS | Ground pins. |
| 2, 3, 5, 6, 8, 9, 11, 12, 39, 40, 42, 43, 45, 46, 48, 49 | I/O | DQ1-DQ16 | I/O pins are the same as conventional DRAM. |
| 14, 36 | I | DQML, DQMU | DQMU controls upper byte and DQML controls lower byte input/output buffers. In read mode, DQMU, DQML control output buffer impedance like conventional \overline{OE} . If DQMU, DQML is high, output buffers become high impedance. If DQMU, DQML is low, output buffers become low impedance. And when device in write mode, DQMU, DQML control word mask. If DQMU, DQML is high input data is not written to memory cell. If DQMU, DQML is low input data is written to memory cell. |
| 15, 16, 17 | I | \overline{WE} \overline{CAS} \overline{RAS} | \overline{WE} \overline{CAS} \overline{RAS} have the same names with conventional DRAM. But these pins have different definitions with conventional ones. All of these pins only define command cycle definition. For detail information see command table. |
| 18 | I | \overline{CS} | \overline{CS} low start the command input cycle. When \overline{CS} is high, all input are not referenced. But even if \overline{CS} is high, internal operations i.e. bank active or burst are not changed. |
| 19 | I | A9 | A9 is bank select signal (BS). In command cycle, A9=low select bank A and A9=high select bank B. |

| No. | I/O | Pin Name | Function |
|------------------|-----|----------|---|
| 20, 21-24, 27-30 | I | A0-A8 | Row address (AX0-AX6, AX8) is determined by A0-A8 level at the bank active command cycle CLK rising edge. (AX7 is don't care.) Column address (AY0-AY7) is determined by A0-A7 level at read or write command cycle CLK rising edge. And this column address become burst access start address. A8 define precharge mode command cycle, both banks are precharged. But A8=low in when A8=high in precharge command cycle, only one bank that is selected A9 (BS) is precharged. And when A8=high in read or write command cycle, the precharge cycle start automatically after the last data in burst accessing. |
| 31, 32 | - | GND | Ground |
| 33, 37 | - | NC | Not connected. |
| 34 | I | CKE | CKE determine next CLK is valid or not. If CKE is high next CLK rising edge is valid. But if CKE is low, next CLK is invalid. If CLK rising edge is invalid, internal clock is not asserted and μ PD4504161 becomes halt operation. And when μ PD4502161 does not in burst mode and CKE is negated, μ PD4502161 enter power down mode. During power down mode CKE must keep low level. |
| 35 | I | CLK | CLK is the master clock input pin. The other inputs signals are referenced at CLK rising edge. |

IC14 VDP2

IC CUSTOM CHIP VDP2 QFP YAMAHA

IC CUSTOM CHIP VDP2 QFP HH


IC CUSTOM CP VDP2 S QFP YAMAHA

Parts No. : 315-5690


Parts No. : 315-5690-02

Parts No. : 315-5890

Top View

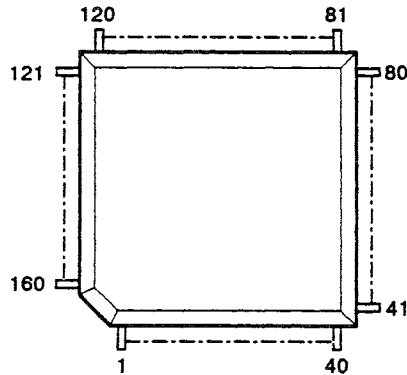

Block Diagram

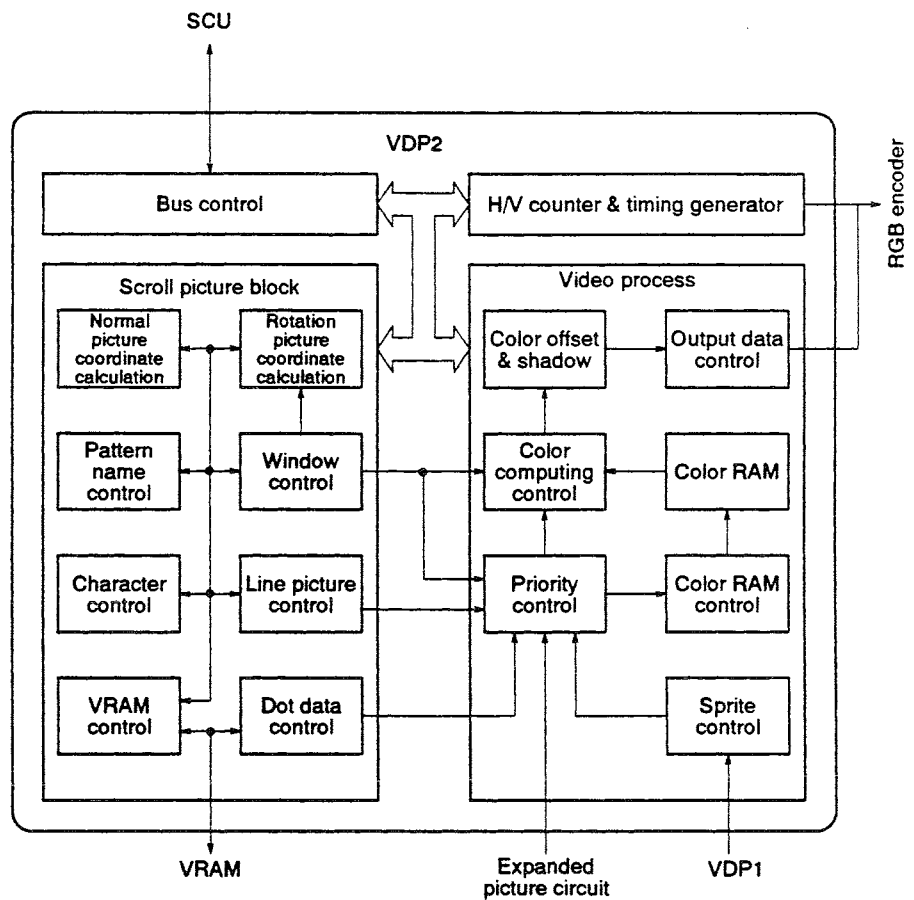

| No. | I/O | Pin Name | Function |
|-----|-----|--------------------|---|
| 1 | O | \overline{RBCS} | VRAM-B chip select |
| 2 | O | \overline{RBRAS} | VRAM-B row address strobe |
| 3 | O | \overline{RBCAS} | VRAM-B column address strobe |
| 4 | O | \overline{RBWE} | VRAM-B write enable |
| 5 | - | VSS | GND |
| 6 | O | RBLDM | VRAM-B DQ low-order mask enable |
| 7 | O | RBUDM | VRAM-B DQ high-order mask enable |
| 8 | O | RBA0 | VRAM-B address bit 0 |
| 9 | O | RBA1 | VRAM-B address bit 1 |
| 10 | - | VDD | +5V power supply |
| 11 | O | RBA2 | VRAM-B address bit 2 |
| 12 | O | RBA3 | VRAM-B address bit 3 |
| 13 | O | RBA4 | VRAM-B address bit 4 |
| 14 | O | RBA5 | VRAM-B address bit 5 |
| 15 | - | VSS | GND |
| 16 | O | RBA6 | VRAM-B address bit 6 |
| 17 | O | RBA7 | VRAM-B address bit 7 |
| 18 | O | RBA8 | VRAM-B address bit 8 |
| 19 | O | RBA9 | VRAM-B address bit 9 |
| 20 | I/O | VD0 | SYSICON interface data bit 0 |
| 21 | I/O | VD1 | SYSICON interface data bit 1 |
| 22 | I/O | VD2 | SYSICON interface data bit 2 |
| 23 | I/O | VD3 | SYSICON interface data bit 3 |
| 24 | - | VSS | GND |
| 25 | I/O | VD4 | SYSICON interface data bit 4 |
| 26 | I/O | VD5 | SYSICON interface data bit 5 |
| 27 | I/O | VD6 | SYSICON interface data bit 6 |
| 28 | I/O | VD7 | SYSICON interface data bit 7 |
| 29 | - | VDD | +5V power supply |
| 30 | I/O | VD8 | SYSICON interface data bit 8 |
| 31 | I/O | VD9 | SYSICON interface data bit 9 |
| 32 | I/O | VD10 | SYSICON interface data bit 10 |
| 33 | I/O | VD11 | SYSICON interface data bit 11 |
| 34 | I/O | VD12 | SYSICON interface data bit 12 |
| 35 | I/O | VD13 | SYSICON interface data bit 13 |
| 36 | - | VSS | GND |
| 37 | I/O | VD14 | SYSICON interface data bit 14 |
| 38 | I/O | VD15 | SYSICON interface data bit 15 |
| 39 | I | \overline{AD} | SYSICON interface address/data selection |
| 40 | I | \overline{DTEN} | SYSICON interface data enable |
| 41 | O | \overline{READY} | SYSICON interface data ready |
| 42 | I | \overline{CS} | SYSICON interface chip select |
| 43 | - | VDD | +5V power supply |
| 44 | O | \overline{VINT} | SYSICON interface vertical interrupt |
| 45 | O | \overline{HINT} | SYSICON interface horizontal interrupt |
| 46 | I | \overline{EXLAT} | External latch strobe input |
| 47 | I | \overline{EXSYN} | External sync signal input |
| 48 | I/O | EXBG0 | External input data bit 0 / Test input/output (in test mode) |
| 49 | I/O | EXBG1 | External input data bit 1 / Test input/output (in test mode) |
| 50 | I/O | EXBG2 | External input data bit 2 / Test input/output (in test mode) |
| 51 | I/O | EXBG3 | External input data bit 3 / Test input/output (in test mode) |
| 52 | - | VSS | GND |
| 53 | I/O | EXBG4 | External input data bit 4 / Test input/output (in test mode) |
| 54 | I/O | EXBG5 | External input data bit 5 / Test input/output (in test mode) |
| 55 | I/O | EXBG6 | External input data bit 6 / Test input/output (in test mode) |
| 56 | I/O | EXBG7 | External input data bit 7 / Test input/output (in test mode) |
| 57 | I/O | EXBG8 | External input data bit 8 / Test input/output (in test mode) |
| 58 | I/O | EXBG9 | External input data bit 9 / Test input/output (in test mode) |
| 59 | I/O | EXBG10 | External input data bit 10 / Test input/output (in test mode) |
| 60 | I/O | EXBG11 | External input data bit 11 / Test input/output (in test mode) |
| 61 | I/O | EXBG12 | External input data bit 12 / Test input/output (in test mode) |
| 62 | I/O | EXBG13 | External input data bit 13 / Test input/output (in test mode) |
| 63 | I/O | EXBG14 | External input data bit 14 / Test input/output (in test mode) |

| No. | I/O | Pin Name | Function |
|-----|-----|----------|---|
| 64 | I/O | EXBG15 | External input data bit 15 / Test input/output (in test mode) |
| 65 | I/O | EXBG16 | External input data bit 16 / Test input/output (in test mode) |
| 66 | I/O | EXBG17 | External input data bit 17 / Test input/output (in test mode) |
| 67 | - | VSS | GND |
| 68 | I/O | EXBG18 | External input data bit 18 / Test input/output (in test mode) |
| 69 | I/O | EXBG19 | External input data bit 19 / Test input/output (in test mode) |
| 70 | I/O | EXBG20 | External input data bit 20 / Test input/output (in test mode) |
| 71 | I/O | EXBG21 | External input data bit 21 / Test input/output (in test mode) |
| 72 | I/O | EXBG22 | External input data bit 22 / Test input/output (in test mode) |
| 73 | I/O | EXBG23 | External input data bit 23 / Test input/output (in test mode) |
| 74 | I | EXON | External input data display timing |
| 75 | - | VDD | +5V power supply |
| 76 | I | CLK | Main clock input |
| 77 | O | EXSL | External video select signal |
| 78 | I | RESET | Initial reset input |
| 79 | I | NTSC | NTSC/PAL selection |
| 80 | - | VSS | GND |
| 81 | - | AVSS | GND of linear RGB |
| 82 | O | R | Linear R output |
| 83 | O | G | Linear G output |
| 84 | O | B | Linear B output |
| 85 | - | AVDD | +5V power supply of linear RGB |
| 86 | O | CSYNC | Composite sync signal output |
| 87 | O | VSYNC | Vertical sync signal output |
| 88 | O | HSYNC | Horizontal sync signal output |
| 89 | - | VDD | +5V power supply |
| 90 | O | DCLK | Dot clock output |
| 91 | O | HTIM | VDP1 interface H timing |
| 92 | O | VTIM | VDP1 interface V timing |
| 93 | I/O | FBD0 | VDP1 interface data bit 0 |
| 94 | I/O | FBD1 | VDP1 interface data bit 1 |
| 95 | I/O | FBD2 | VDP1 interface data bit 2 |
| 96 | I/O | FBD3 | VDP1 interface data bit 3 |
| 97 | - | VSS | GND |
| 98 | I/O | FBD4 | VDP1 interface data bit 4 |
| 99 | I/O | FBD5 | VDP1 interface data bit 5 |
| 100 | I/O | FBD6 | VDP1 interface data bit 6 |
| 101 | I/O | FBD7 | VDP1 interface data bit 7 |
| 102 | O | RAA0 | VRAM- A address bit 0 |
| 103 | O | RAA1 | VRAM- A address bit 1 |
| 104 | O | RAA2 | VRAM- A address bit 2 |
| 105 | O | RAA3 | VRAM- A address bit 3 |
| 106 | - | VSS | GND |
| 107 | O | RAA4 | VRAM- A address bit 4 |
| 108 | O | RAA5 | VRAM- A address bit 5 |
| 109 | O | RAA6 | VRAM- A address bit 6 |
| 110 | O | RAA7 | VRAM- A address bit 7 |
| 111 | - | VDD | +5V power supply |
| 112 | O | RAA8 | VRAM- A address bit 8 |
| 113 | O | RAA9 | VRAM- A address bit 9 |
| 114 | O | RACS | VRAM=A chip select |
| 115 | O | RARAS | VRAM- A row address strobe |
| 116 | - | VSS | GND |
| 117 | O | RACAS | VRAM- A column address strobe |
| 118 | O | RAWWE | VRAM- A write enable |
| 119 | O | RALDM | VRAM- A DQ low- order mask enable |
| 120 | O | RAUDM | VRAM- A DQ high- order mask enable |
| 121 | I/O | RAD0 | VRAM- A data bit 0 |
| 122 | I/O | RAD1 | VRAM- A data bit 1 |
| 123 | I/O | RAD2 | VRAM- A data bit 2 |
| 124 | I/O | RAD3 | VRAM- A data bit 3 |
| 125 | - | VSS | GND |
| 126 | I/O | RAD4 | VRAM- A data bit 4 |


| No. | I/O | Pin Name | Function |
|-----|-----|--------------------------|--|
| 127 | I/O | RAD5 | VRAM – A data bit 5 |
| 128 | I/O | RAD6 | VRAM – A data bit 6 |
| 129 | I/O | RAD7 | VRAM – A data bit 7 |
| 130 | – | VDD | +5V power supply |
| 131 | I/O | RAD8 | VRAM – A data bit 8 |
| 132 | I/O | RAD9 | VRAM – A data bit 9 |
| 133 | I/O | RAD10 | VRAM – A data bit 10 |
| 134 | I/O | RAD11 | VRAM – A data bit 11 |
| 135 | – | VSS | GND |
| 136 | I/O | RAD12 | VRAM – A data bit 12 |
| 137 | I/O | RAD13 | VRAM – A data bit 13 |
| 138 | I/O | RAD14 | VRAM – A data bit 14 |
| 139 | I/O | RAD15 | VRAM – A data bit 15 |
| 140 | O | RCLK | VRAM – A/B clock |
| 141 | I | $\overline{\text{TEST}}$ | Test mode selection (normally, connected to VDD) |
| 142 | I/O | RBD0 | VRAM – B data bit 0 |
| 143 | I/O | RBD1 | VRAM – B data bit 1 |
| 144 | I/O | RBD2 | VRAM – B data bit 2 |
| 145 | I/O | RBD3 | VRAM – B data bit 3 |
| 146 | – | VSS | GND |
| 147 | I/O | RBD4 | VRAM – B data bit 4 |
| 148 | I/O | RBD5 | VRAM – B data bit 5 |
| 149 | I/O | RBD6 | VRAM – B data bit 6 |
| 150 | I/O | RBD7 | VRAM – B data bit 7 |
| 151 | – | VDD | +5V power supply |
| 152 | I/O | RBD8 | VRAM – B data bit 8 |
| 153 | I/O | RBD9 | VRAM – B data bit 9 |
| 154 | I/O | RBD10 | VRAM – B data bit 10 |
| 155 | I/O | RBD11 | VRAM – B data bit 11 |
| 156 | – | VSS | GND |
| 157 | I/O | RBD12 | VRAM – B data bit 12 |
| 158 | I/O | RBD13 | VRAM – B data bit 13 |
| 159 | I/O | RBD14 | VRAM – B data bit 14 |
| 160 | I/O | RBD15 | VRAM – B data bit 15 |

IC17 SCSP

IC CUSTOM CHIP SCSP QFP YAMAHA

Parts No. : 315-5687

Top View

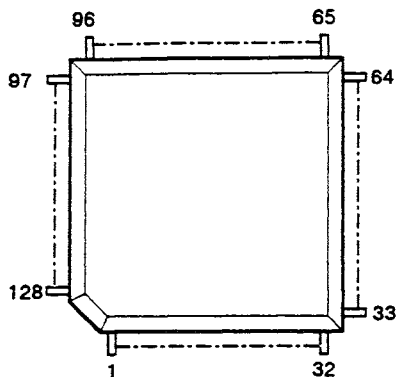


Description

| No. | I/O | Pin Name | Function |
|-----|-----|----------------------------|---|
| 1 | I/O | MCD6 | MCPU data bus |
| 2 | | MCD5 | |
| 3 | | MCD4 | |
| 4 | | MCD3 | |
| 5 | — | VSS | GND |
| 6 | I/O | MCD2 | MCPU data bus |
| 7 | | MCD1 | |
| 8 | | MCD0 | |
| 9 | O | $\overline{\text{MCRDYN}}$ | Ready signal to MCPU |
| 10 | O | $\overline{\text{MCINTN}}$ | Interrupt request to MCPU |
| 11 | — | VDD | Power supply (5v) |
| 12 | I | $\overline{\text{RESETN}}$ | SCSP reset input |
| 13 | — | VSS | GND |
| 14 | I | MACK | SCSP master clock: 512fs (22.58MHz) |
| 15 | I | $\overline{\text{INT2N}}$ | SCSP external interrupt request input |
| 16 | | $\overline{\text{INT1N}}$ | |
| 17 | | $\overline{\text{INT0N}}$ | |
| 18 | — | VDD | Power supply (5v) |
| 19 | I | ESD | Digital audio interface serial data input |
| 20 | I | EBCK | Digital audio interface BCK |
| 21 | I | ELRCK | Digital audio interface LRCK |
| 22 | I | MIDIINP | MIDI input |
| 23 | — | VSS | GND |
| 24 | O | MIDIOUT | MIDI output |
| 25 | O | $\overline{\text{MRASN}}$ | RAS signal |
| 26 | O | $\overline{\text{MWEUN}}$ | Write signal corresponding to MD[15-8] |
| 27 | O | $\overline{\text{MWELN}}$ | Write signal corresponding to MD[7-0] |
| 28 | O | $\overline{\text{MCASON}}$ | CAS signal |
| 29 | | $\overline{\text{MCASIN}}$ | |
| 30 | O | $\overline{\text{MOEN}}$ | Sound memory data output enable |
| 31 | — | VDD | Power supply (5v) |
| 32 | O | MA0 | Sound memory address |
| 33 | | MA1 | |
| 34 | | MA2 | |
| 35 | | MA3 | |
| 36 | | MA4 | |
| 37 | | MA5 | |
| 38 | — | VSS | GND |
| 39 | O | MA6 | Sound memory address |
| 40 | | MA7 | |
| 41 | | MA8 | |
| 42 | I/O | MD0 | Sound memory data |

| No. | I/O | Pin Name | Function ₂ |
|-----|-----|-----------------------------|--|
| 43 | I/O | MD1 | Sound memory data |
| 44 | | MD2 | |
| 45 | – | VDD | Power supply (5V) |
| 46 | I/O | MD3 | Sound memory data |
| 47 | | MD4 | |
| 48 | | MD5 | |
| 49 | | MD6 | |
| 50 | | MD7 | |
| 51 | | MD8 | |
| 52 | – | VSS | GND |
| 53 | I/O | MD9 | Sound memory data |
| 54 | | MD10 | |
| 55 | | MD11 | |
| 56 | | MD12 | |
| 57 | | MD13 | |
| 58 | | MD14 | |
| 59 | – | VDD | Power supply (5V) |
| 60 | I/O | MD15 | Sound memory data |
| 61 | O | DSD | DAC interface serial data output |
| 62 | O | DBCK | DAC interface BCK |
| 63 | O | DLRCK | DAC interface LRCK |
| 64 | O | DSCK | DAC interface system clock [256fs clock] |
| 65 | I | SCA23 | SCPU address bus |
| 66 | | SCA22 | |
| 67 | | SCA21 | |
| 68 | | SCA20 | |
| 69 | | SCA19 | |
| 70 | – | VSS | GND |
| 71 | I | SCA18 | SCPU address bus |
| 72 | | SCA17 | |
| 73 | | SCA16 | |
| 74 | | SCA15 | |
| 75 | | SCA14 | |
| 76 | | SCA13 | |
| 77 | | SCA12 | |
| 78 | | SCA11 | |
| 79 | | SCA10 | |
| 80 | – | VDD | Power supply (5V) |
| 81 | I | SCA9 | SCPU address bus |
| 82 | | SCA8 | |
| 83 | | SCA7 | |
| 84 | | SCA6 | |
| 85 | | SCA5 | |
| 86 | | SCA4 | |
| 87 | | SCA3 | |
| 88 | | SCA2 | |
| 89 | | SCA1 | |
| 90 | – | VSS | GND |
| 91 | I | SCFC0 | SCPU status input |
| 92 | | SCFC1 | |
| 93 | | SCFC2 | |
| 94 | I | $\overline{\text{SCWTN}}$ | SCPU write |
| 95 | I | $\overline{\text{SCLDSN}}$ | SCPU SCD [7-0] strobe |
| 96 | I | $\overline{\text{SCUDSN}}$ | SCPU SCD [15-8] strobe |
| 97 | I | $\overline{\text{SCASN}}$ | SCPU address strobe |
| 98 | – | $\overline{\text{TESTN}}$ | LSI test signal (Not connected) |
| 99 | – | VDD | Power supply (5V) |
| 100 | O | $\overline{\text{SCDTAKN}}$ | SCPU data acknowledge |
| 101 | O | $\overline{\text{SCAVECN}}$ | SCPU auto vector interrupt specification |
| 102 | O | $\overline{\text{SCIPL0N}}$ | SCPU interrupt level specification |
| 103 | | $\overline{\text{SCIPL1N}}$ | |
| 104 | | $\overline{\text{SCIPL2N}}$ | |
| 105 | I/O | SCD0 | SCPU data bus |

| No. | I/O | Pin Name | Function |
|-----|-----|----------|--------------------------|
| 106 | I/O | SCD1 | SCPU data bus |
| 107 | - | VSS | GND |
| 108 | I/O | SCD2 | SCPU data bus |
| 109 | | SCD3 | |
| 110 | | SCD4 | |
| 111 | | SCD5 | |
| 112 | | SCD6 | |
| 113 | | SCD7 | |
| 114 | | SCD8 | |
| 115 | - | VDD | Power supply (5V) |
| 116 | I/O | SCD9 | SCPU data bus |
| 117 | | SCD10 | |
| 118 | | SCD11 | |
| 119 | - | VSS | GND |
| 120 | I/O | SCD12 | SCPU data bus |
| 121 | | SCD13 | |
| 122 | | SCD14 | |
| 123 | | SCD15 | |
| 124 | - | VSS | GND |
| 125 | I | MCCSN | Select signal from MCPUI |
| 126 | I | MCCK | 28 MHz clock from MCPUI |
| 127 | - | VDD | Power supply (5V) |
| 128 | I/O | MCD7 | MCPU data bus |

SCSP Chip Block Diagram

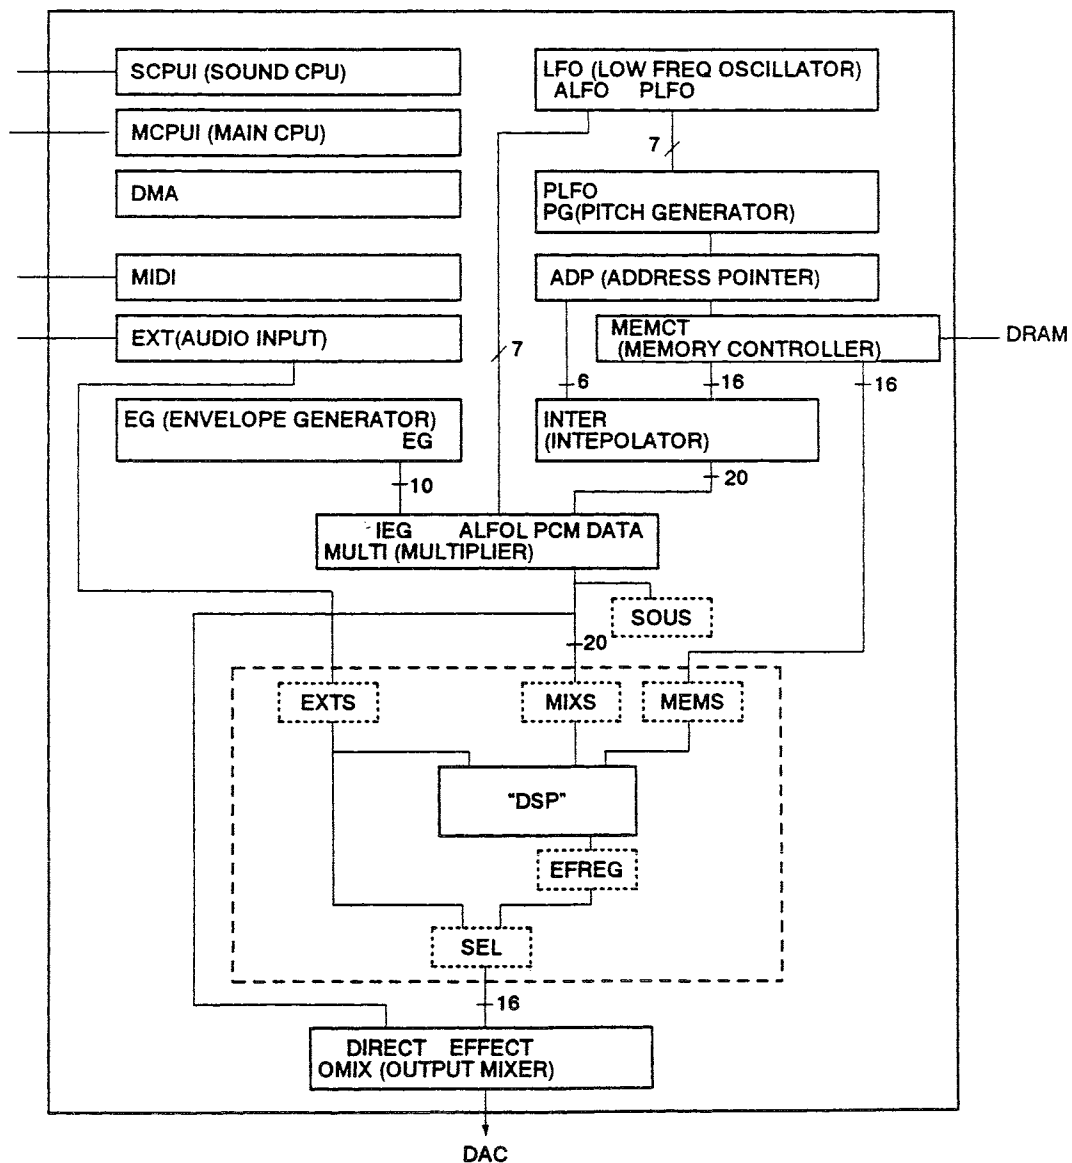


IC18 SOUND CPU (68000)


IC MC68EC000FN12 PLCC MOTOROLA

Parts No. : 315-0941

Top View

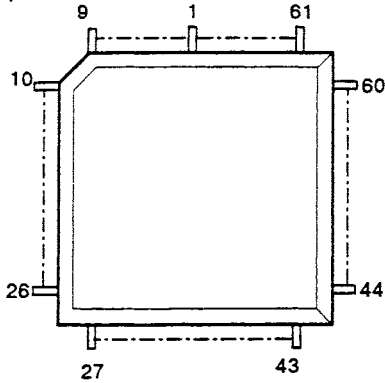

Signal Description

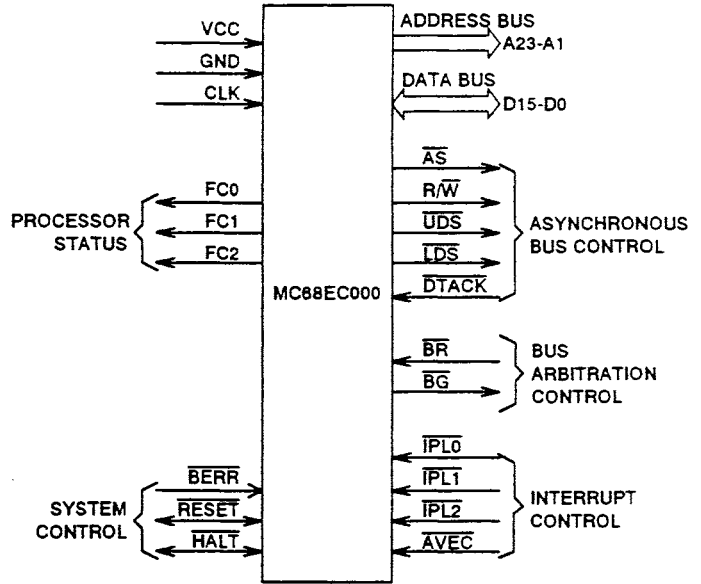

Description

| No. | I/O | Name | Function |
|-----|-----|--------------------|---------------------------|
| 1 | - | GND | |
| 2 | I/O | D4 | Data bus |
| 3 | | D3 | |
| 4 | | D2 | |
| 5 | | D1 | |
| 6 | | D0 | |
| 7 | O | \overline{AS} | Address strobe |
| 8 | | \overline{UDS} | Upper data strobe |
| 9 | | \overline{LDS} | Lower data strobe |
| 10 | | R/W | Read/write |
| 11 | I | \overline{DTACK} | Data transfer acknowledge |
| 12 | O | \overline{BG} | Bus grant |
| 13 | I | \overline{BR} | Bus request |
| 14 | - | VCC | Power |
| 15 | I | CLK | Clock |
| 17 | - | GND | Ground |
| 19 | I | MODE | 8 bit/16 bit select |
| 20 | I/O | \overline{HALT} | Halt |
| 21 | I/O | \overline{RESET} | Reset |
| 22 | - | NC | Not connected |
| 23 | I | \overline{AVEC} | |
| 24 | I | \overline{BERR} | Bus error |
| 25 | I | $\overline{IPL2}$ | Interrupt control |
| 26 | | $\overline{IPL1}$ | |
| 27 | | $\overline{IPL0}$ | |
| 28 | O | FC2 | Processor status |
| 29 | | FC1 | |
| 30 | | FC0 | |
| 31 | O | A0 | Address bus |
| 32 | | A1 | |
| 33 | | A2 | |
| 34 | | A3 | |

| No. | I/O | Name | Function |
|-----|-----|------|-------------|
| 35 | - | GND | Ground |
| 36 | O | A4 | Address bus |
| 37 | | A5 | |
| 38 | | A6 | |
| 39 | | A7 | |
| 40 | | A8 | |
| 41 | | A9 | |
| 42 | | A10 | |
| 43 | | A11 | |
| 44 | | A12 | |
| 45 | | A13 | |
| 46 | | A14 | |
| 47 | | A15 | |
| 48 | | A16 | |
| 49 | | A17 | |
| 50 | | A18 | |
| 51 | | A19 | |
| 52 | | A20 | |
| 53 | - | VCC | Power |
| 54 | O | A21 | Address bus |
| 55 | | A22 | |
| 56 | | A23 | |
| 57 | - | GND | Ground |
| 58 | I/O | D15 | Data bus |
| 59 | | D14 | |
| 60 | | D13 | |
| 61 | | D12 | |
| 62 | | D11 | |
| 63 | | D10 | |
| 64 | | D9 | |
| 65 | | D8 | |
| 66 | | D7 | |
| 67 | | D6 | |
| 68 | | D5 | |

IC19 Sound DRAM


IC HM514270AJ-8 SOJ HITACHI
Parts No. : 315-0777-80

IC UPD424270LE-70 SOJ NEC
Parts No. : 315-0739-70

IC HM514270AJ-7 SOJ HITACHI
Parts No. : 315-0777-70

IC MN414270SJ-08 SOJ PANASONIC
Parts No. : 315-0822-80

Top View & Pin Layout

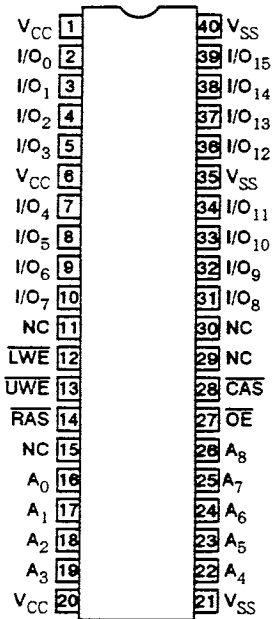



| Input State | | | | Output State | Operation Mode |
|-------------|-----|------|------|--------------|--|
| RAS | CAS | UWE | LWE | | |
| H | H | D | D | Open | Standby |
| H | L | H | H | Valid | Standby |
| L | L | H | H | Valid | Read cycle |
| L | L | L 2) | L 2) | Open | Early write cycle |
| L | L | L 2) | L 2) | Underlined | Delayed write cycle |
| L | L | H→L | H→L | Valid | Read modified write cycle |
| L | H | D | D | Open | RAS only refresh cycle |
| H→L | L | D | D | Open | CAS before RAS refresh cycle |
| L | H→L | H | H | Valid | High-speed page mode read cycle |
| L | H→L | L 2) | L 2) | Open | High-speed page mode early write cycle |
| L | H→L | L 2) | L 2) | Underlined | High-speed page mode delayed write cycle |
| L | H→L | H→L | H→L | Valid | High-speed page mode read modified write cycle |

Note: H=High(inactive), L=Low(active), D=Don't care.

IC20 PLL

IC CUSTOM CHIP PLL HQFP
Parts No. : 315-5746

Top View

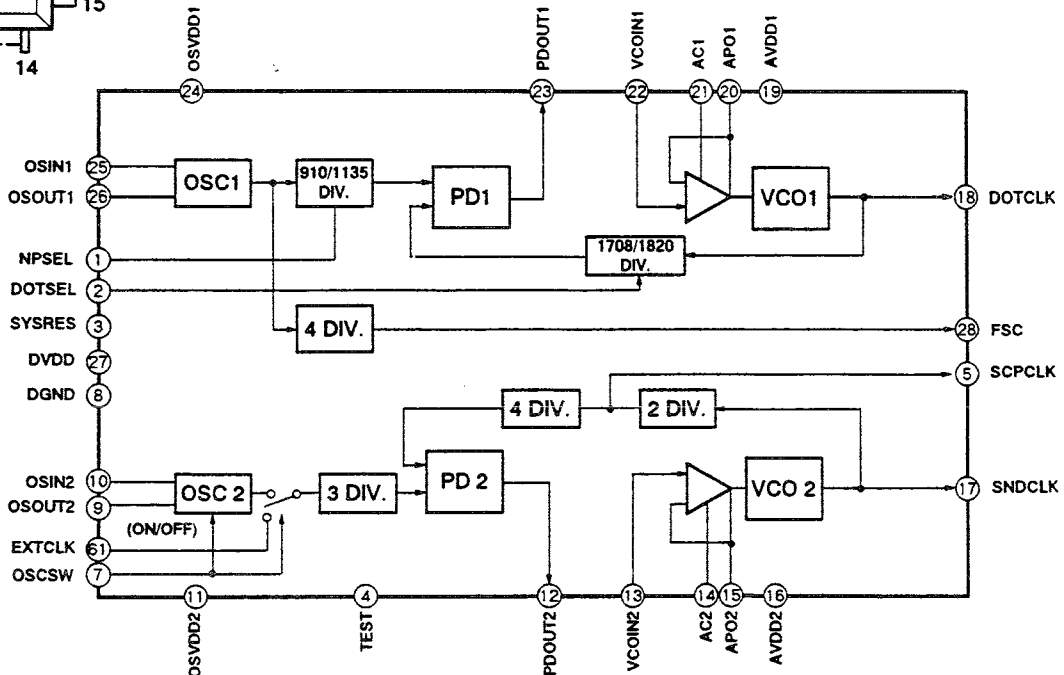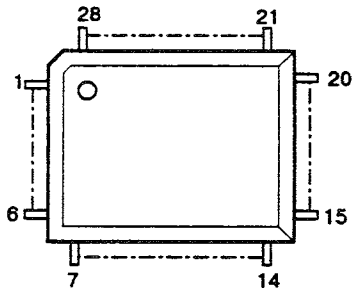

■ Description


| No. | I/O | Name | Function |
|-----|-----|--------|--|
| 1 | I | NPSEL | NTSC (5V)/PAL (0V) mode switching control |
| 2 | | DOTSEL | 320PIX (0V)/352PIX (5V) mode switching control |
| 3 | | SYSRES | Reset (0V reset) |
| 4 | | TEST | Test pin |
| 5 | O | SCPCLK | Clock signal output |
| 6 | I | EXTCLK | External clock input / CMOS I with pull-down resistor incorporated |
| 7 | | OSCSW | Crystal oscillation/external clock signal input switching control (5V: Crystal oscillation, 0V: External clock signal) / CMOS I with pull-up resistor incorporated |
| 8 | - | DGND | Ground of digital circuits |
| 9 | O | OSOUT2 | Crystal oscillator output (OSC2) / Oscillation output O |
| 10 | I | OSIN2 | Crystal oscillator input (OSC2) / Oscillation input I |
| 11 | - | OSVDD2 | VDD of crystal oscillator (OSC2) |
| 12 | O | PDOUT2 | Phase detector (PD2) output |
| 13 | I | VCOIN2 | VCO2 input / Analog I |
| 14 | - | AC2 | Phase compensator pin / Analog |
| 15 | O | APO2 | VCO2 amp output / Analog O |
| 16 | - | AVDD2 | Analog VDD of VCO2 |
| 17 | I/O | SNDCLK | Clock signal output |
| 18 | | DOTCLK | Clock signal output |
| 19 | - | AVDD1 | Analog VDD of VCO1 |
| 20 | O | APO1 | VCO1 amp output / Analog O |
| 21 | - | AC1 | Phase compensator pin / Analog |
| 22 | I | VCOIN1 | VCO1 input / Analog |
| 23 | O | PDOUT1 | Phase detector (PD1) output |
| 24 | - | OSVDD1 | VDD of crystal oscillator (OSC1) |
| 25 | I | OSIN1 | Crystal oscillator input (OSC1) / Oscillation input I |
| 26 | O | OSOUT1 | Crystal oscillator output (OSC1) / Oscillation output O |
| 27 | - | DVDD | VDD of digital circuits |
| 28 | O | FSC | Clock output signal |

IC21

IC CXA1645M SOP SONY

Parts No. : 315-5314

■ Block Diagram

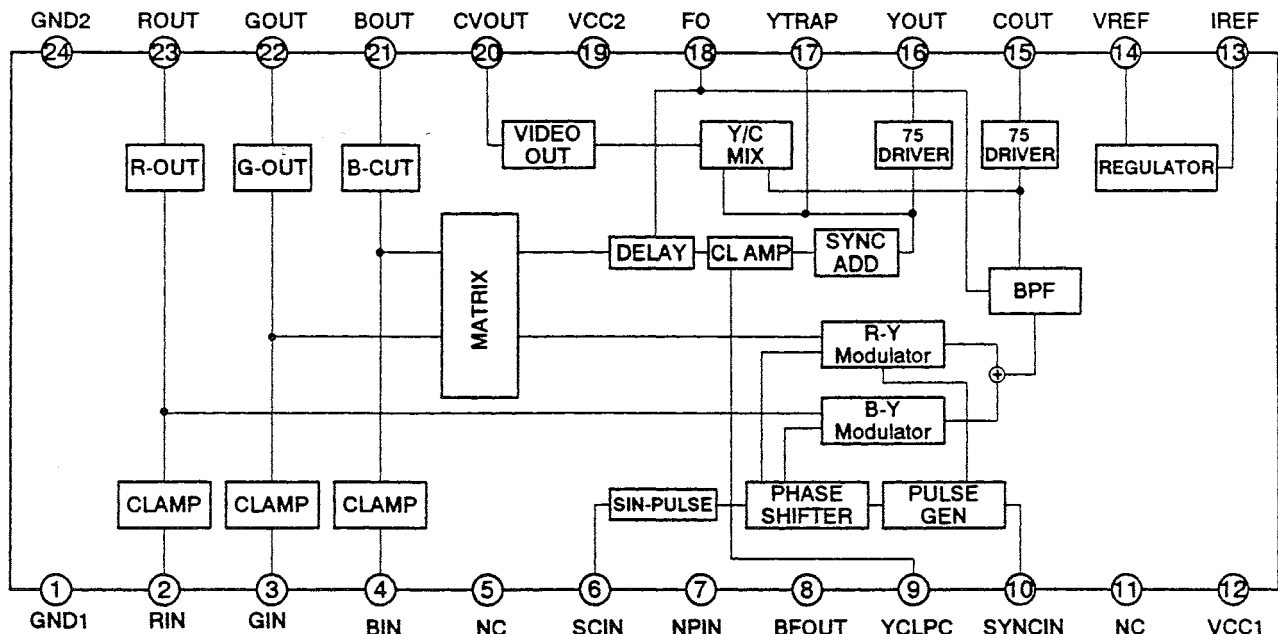

■ Description


| No. | I/O | Pin Name | Function |
|-----|-----|----------|--|
| 1 | — | GND1 | Ground of circuits other than RGB, composite video and Y/C output circuits. |
| 2 | I | RIN | Analog RGB signal inputs. The signals should be input with 100%=1V _{p-p} (max.). |
| 3 | | GIN | |
| 4 | | BIN | |
| 5 | — | NC | Not connected. |
| 6 | I | SCIN | Subcarrier input |
| 7 | I | NPIN | NTSC/PAL mode switching pin |
| 8 | O | BFOUT | BF pulse monitoring output |
| 9 | — | YCLPC | Time constant which determines the Y signal clamp is connected. |
| 10 | I | SYNC IN | Composite sync signal input. Receives it at the TTL level. |
| 11 | — | NC | Not connected. |
| 12 | — | VCC1 | Power supply of circuit other than RGB, composite video and Y/C output |
| 13 | — | IREF | Pin to determine the internal reference current level. |
| 14 | — | VREF | Internal reference voltage pin. |
| 15 | O | COUT | Chroma signal output. Can drive a 75 Ω load. |
| 16 | O | YOUT | Y (luma) signal output. Can drive a 75 Ω load. |
| 17 | — | YTRAP | Reduces cross-color caused by subcarrier frequency components contained in the Y signal. |
| 18 | — | FO | Adjusts fo of the internal filter. Connect the following resistor between this pin and ground depending on the NTSC or PAL mode. |
| 19 | — | VCC2 | Power supply of RGB, composite video and Y/C output circuits. |
| 20 | O | CVOUT | Composite video signal output. This can drive a 75 Ω load. |
| 21 | O | BOUT | Analog RGB signal outputs. These can drive a 75 Ω load. |
| 22 | | GOUT | |
| 23 | | ROUT | |
| 24 | — | GND2 | Ground of RGB, composite video and Y/C output circuits. |

IC22 DAC

IC TDA1386T SOP PHILIPS

Parts No. : 313-5313


■ Top View

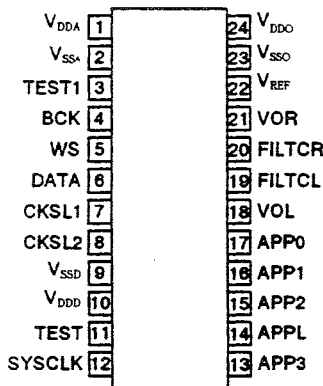

■ Description

| No. | I/O | Pin Name | Function |
|-----|-----|----------|--|
| 1 | — | VDDA | Analog supply voltage |
| 2 | — | VSSA | Analog ground |
| 3 | I | TEST1 | Test input 1; pin should be connected to ground. |
| 4 | I | BCK | Bit clock input. |
| 5 | I | WS | Word select input. |
| 6 | I | DATA | Data input. |
| 7 | I | CKSL1 | Format selection 1. |
| 8 | I | CKSL2 | Format selection 2. |
| 9 | — | VSSD | Digital ground |
| 10 | — | VDDD | Digital supply voltage. |
| 11 | I | TEST2 | Test input 2; pin should be connected to ground. |
| 12 | — | SYSCLK | System clock 256 fs |
| 13 | I | APP3 | Application mode 3 input. |
| 14 | I | APPL | Application mode selection input. |
| 15 | I | APP2 | Application mode 2 input. |
| 16 | I | APP1 | Application mode 1 input. |
| 17 | I | APP0 | Application mode 0 input. |
| 18 | O | VOL | Left channel output. |
| 19 | — | FILTCL | Capacitor for left channel first-order filter function, should be connected between pins 19 and 18. |
| 20 | — | FILTCR | Capacitor for right channel first-order filter function, should be connected between Pins 20 and 21. |
| 21 | O | VOR | Right channel output. |
| 22 | — | VREF | Internal reference voltage for output channels (0.5V _{DDO} typ.). |
| 23 | — | VSSO | Operational amplifier ground. |
| 24 | — | VDDO | Operational amplifier supply voltage. |

■ Block Diagram


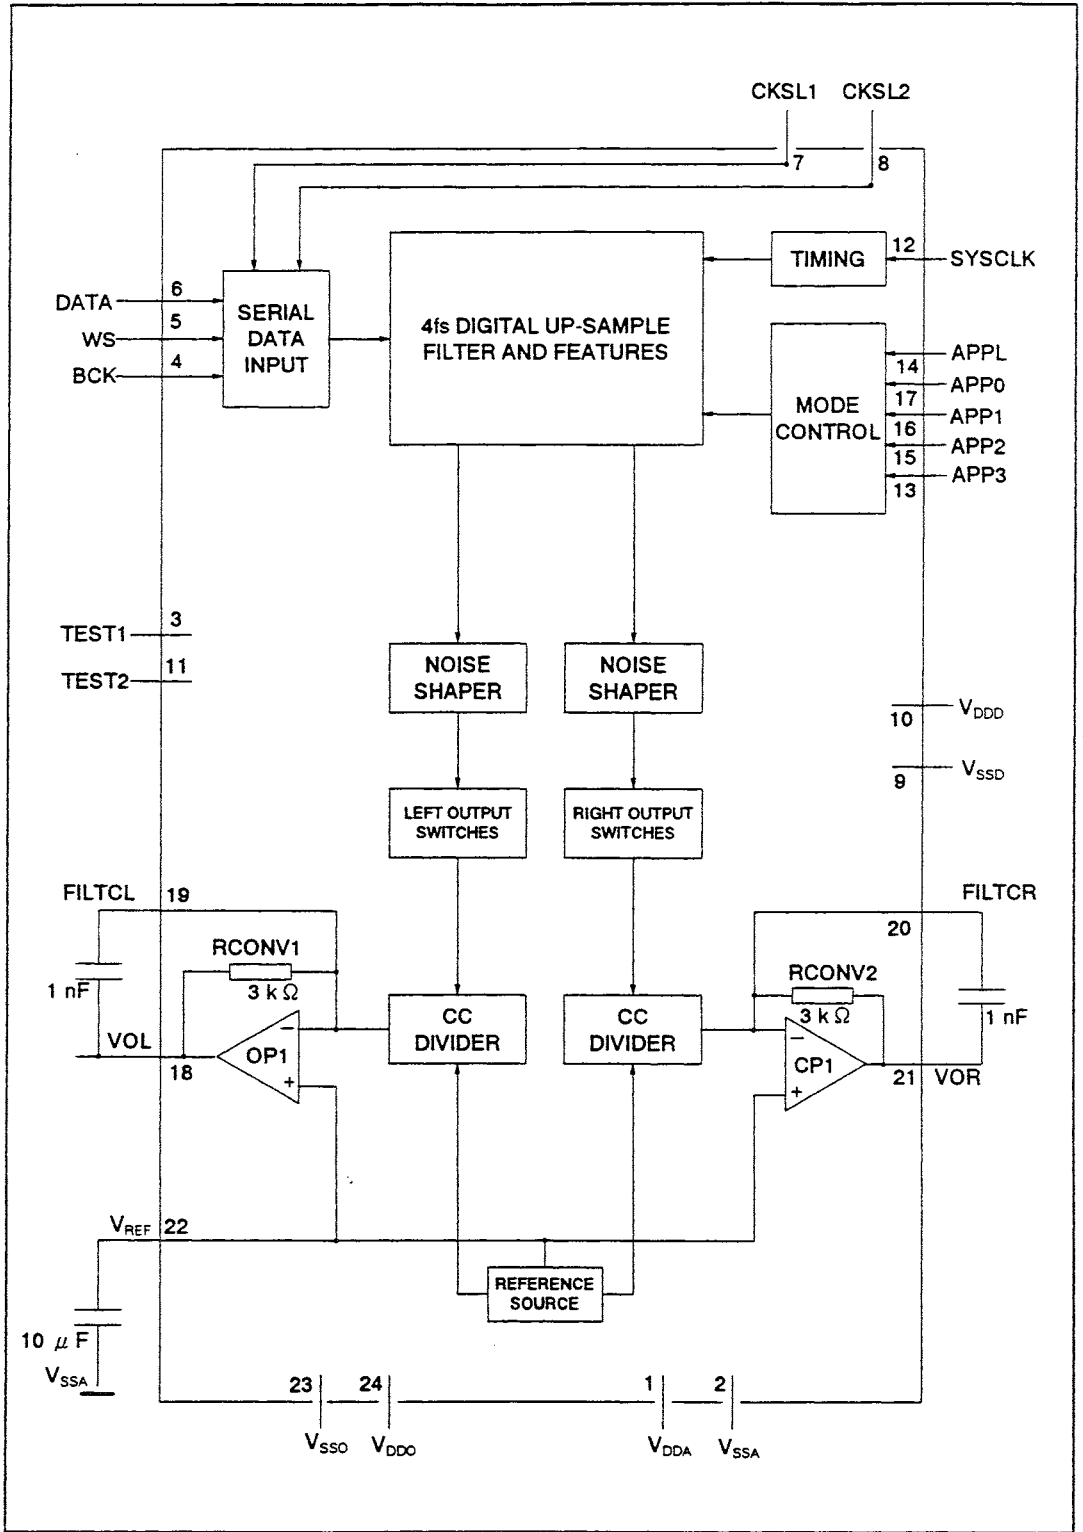


IC23/24 74VHC04

IC 74VHC04 SOP 300MIL

Parts No. : 314-0632

Top View & Pin Layout

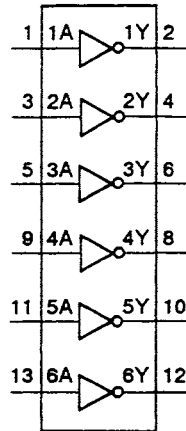



IC25

IC S-80741AL-A5 CHIP

Parts No. : 313-5322

Top View

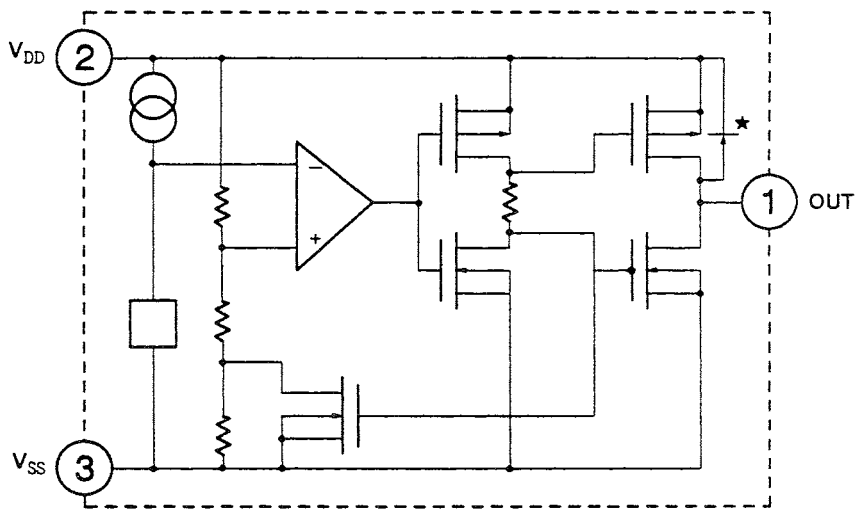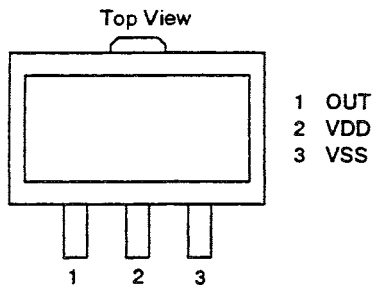


IC26/27/29/30 74LS245

IC 74LS245 SOP 300MIL

Parts No. : 314-0563

Top View & Pin Layout

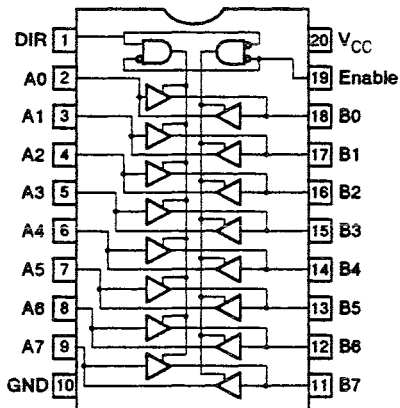

Function Table

| Enable \bar{G} | Direction Control DIR | Operation |
|---------------------|--------------------------|-----------------|
| L | L | B data to A bus |
| L | H | A data to B bus |
| H | X | Isolation |


H : High level
L : Low level
X : "H" or "L" level

IC28 OCTAL BUS TRANSCEIVER


IC 74ACT245 SOP 300MIL

Parts No. : 314-0649

Top View

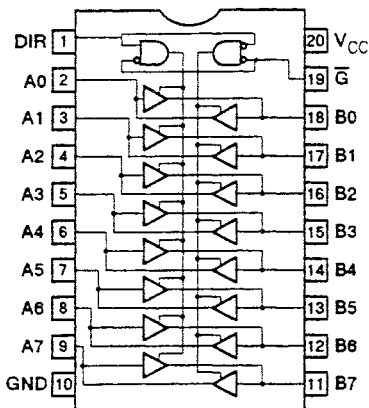

Logical Operation Circuit

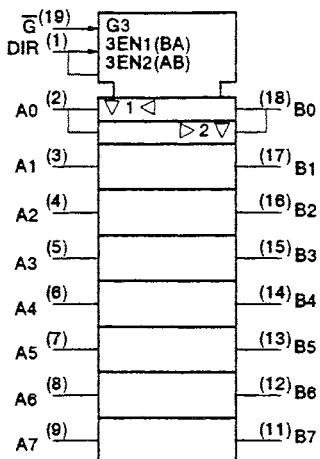

Truth Value Table

| INPUT | | FUNCTION | | OUTPUT STATE |
|-----------|-----|----------------|--------|--------------|
| \bar{G} | DIR | A BUS | B BUS | |
| L | L | OUTPUT | INPUT | A=B |
| L | H | INPUT | OUTPUT | B=A |
| H | X | High impedance | | Z |

X: Don't care

Z: High impedance

IC31/32 DRAM

IC HM514260AJ-7 SOJ

Parts No. : 315-0947-70

IC KM416C256BJ-7 SOJ SAMSUNG

Parts No. : 315-0983-70

IC UPD424260LE-70-E2 SOJ NEC

Parts No. : 315-0985-70

IC MB814260-70PJ-G SOJ FUJITSU

Parts No. : 315-0984-70


IC TC514260BJ-70 SOJ TOSHIBA

Parts No. : 315-0986-70

IC HY514260BJC-70 SOJ HYUNDAI

Parts No. : 315-1030-70



Top View

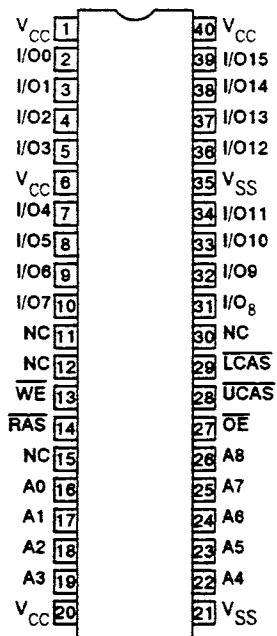

IC33

IC 74HC157 SOP
Parts No. : 314-0634

■ Top View

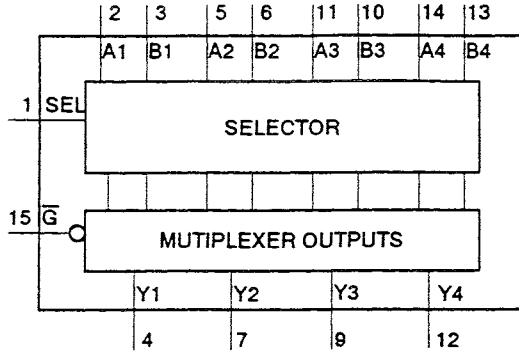

■ Description


| No. | Name | Function |
|-----|-----------------|---------------------------|
| 1 | SEL | Common data select input |
| 2 | A1 | Data inputs from source 0 |
| 3 | B1 | Data inputs from source 1 |
| 4 | Y1 | Multiplexer outputs |
| 5 | A2 | Data inputs from source 0 |
| 6 | B2 | Data inputs from source 1 |
| 7 | Y2 | Multiplexer outputs |
| 8 | GND | Ground (0V) |
| 9 | Y3 | Multiplexer outputs |
| 10 | B3 | Data inputs from source 1 |
| 11 | A3 | Data inputs from source 0 |
| 12 | Y4 | Multiplexer outputs |
| 13 | B4 | Data inputs from source 1 |
| 14 | A4 | Data inputs from source 0 |
| 15 | G | Enable input (active LOW) |
| 16 | V _{cc} | Positive supply voltage |

IC34


IC UPC78L05T CHIP
Parts No. : 313-5323

IC TA78L05F CHIP
Parts No. : 313-5323-01

■ Top View




- 1. OUTPUT
- 2. COMMON (SHIELD PLATE)
- 3. INPUT

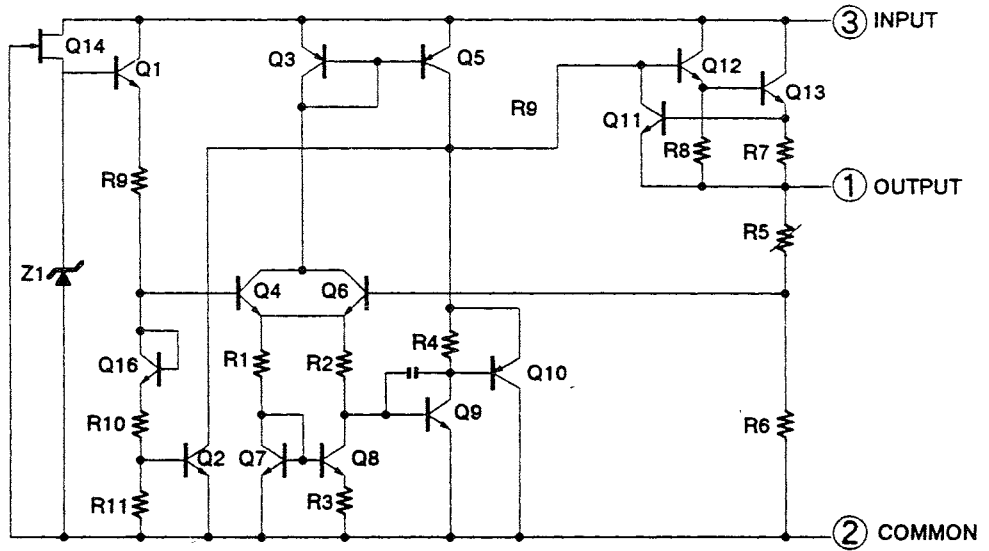


IC35

IC S-80723AN-DL CHIP
Parts No. : 313-5328

■ Top View



- 1. OUT
- 2. VDD
- 3. VSS

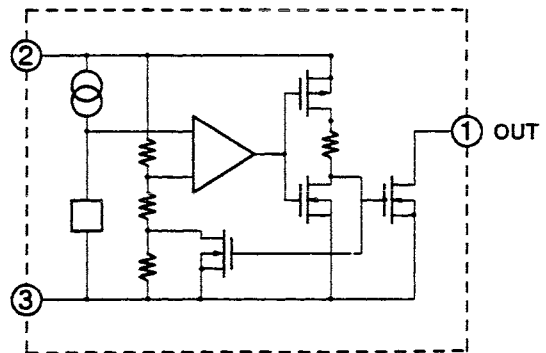

SH1 BOARD IC101 SH1 CPU


IC CUSTOM CHIP SH1 QFP

Parts No. : 315-5785

IC CUSTOM CHIP SH1A QFP

Parts No. : 315-5785A

Top View



Description

| No. | I/O | Pin Name | Function |
|-----|-----|---------------------------|---|
| 1 | | $\overline{\text{IRQ L}}$ | Host command interrupt input (level detection) |
| 2 | | $\overline{\text{IRQ H}}$ | CD-ROM sync detection, subcode sync detection interrupt input (level detection) |
| 3 | | VSS | Ground |
| 4 | I/O | AD0 | Data input/output |
| 5 | | AD1 | |
| 6 | | AD2 | |
| 7 | | AD3 | |
| 8 | | AD4 | |
| 9 | | AD5 | |
| 10 | | AD6 | |
| 11 | AD7 | | |
| 12 | - | VSS | Ground |
| 13 | I/O | AD8 | Data input/output |
| 14 | | AD9 | |
| 15 | - | VCC | +5V |
| 16 | I/O | AD10 | Data input/output |
| 17 | | AD11 | |
| 18 | | AD12 | |
| 19 | | AD13 | |
| 20 | | AD14 | |
| 21 | | AD15 | |
| 22 | - | VSS | Ground |
| 23 | O | A0 | Address output |
| 24 | | A1 | |
| 25 | | A2 | |
| 26 | | A3 | |
| 27 | | A4 | |
| 28 | | A5 | |
| 29 | | A6 | |
| 30 | A7 | | |
| 31 | - | VSS | Ground |
| 32 | O | A8 | Address output |
| 33 | | A9 | |
| 34 | | A10 | |
| 35 | | A11 | |
| 36 | | A12 | |
| 37 | | A13 | |
| 38 | | A14 | |
| 39 | A15 | | |
| 40 | - | VSS | Ground |
| 41 | O | A16 | Address output |
| 42 | | A17 | |
| 43 | - | VCC | +5V |
| 44 | O | A18 | Address output |
| 45 | | A19 | |
| 46 | | A20 | |
| 47 | | A21 | |
| 48 | O | NC | Not connected. |
| 49 | O | CASH | DRAM CASH output |

| No. | I/O | Pin Name | Function |
|-----|-----|------------------------|---|
| 50 | O | $\overline{CS2}$ | CS2 output (GA, MPEG, other area 2 access) |
| 51 | O | \overline{CASL} | DRAM CASL output |
| 52 | | VSS | Ground |
| 53 | I | $\overline{TIOCA0}$ | MPEG A data transfer (DMA3) request input (edge detection) |
| 54 | O | \overline{RAS} | DRAM CASL output |
| 55 | I/O | $\overline{CS6}$ | CS6 output (area 6 access) |
| 56 | - | NC | Not connected. |
| 57 | O | \overline{WRL} | WRL output |
| 58 | O | \overline{WRH} | WRH output |
| 59 | O | \overline{RD} | RD output |
| 60 | O | \overline{RESET} | GA reset output. Lo: RESET, Hi: Release |
| 61 | - | VSS | Ground |
| 62 | O | NC | Not connected. |
| 63 | O | \overline{IROOUT} | Spare (Spare to output "Lo" during interrupt process) |
| 64 | I | $\overline{TIOCA1}$ | MPEG V data transfer (DMA2) request input (edge detection) |
| 65 | O | NC | Not connected. |
| 66 | O | $\overline{DACK0}$ | DMA0 (for CD-ROM sector data input) ACK output (to GA) |
| 67 | I | $\overline{DREQ0}$ | DMA0 (for CD-ROM sector data input) REQ input (from GA) |
| 68 | O | $\overline{DACK1}$ | DMA1 (for host data input/output) ACK output (to GA) |
| 69 | I | $\overline{DREQ1}$ | DMA1 (for host data input/output) REQ output (from GA) |
| 70 | - | VCC | +5V |
| 71 | O | CK | SH-1 system clock output (20MHz) (to GA) |
| 72 | - | VSS | Ground |
| 73 | I | EXTAL | A crystal oscillator is connected. |
| 74 | I | XTAL | A crystal oscillator is connected. |
| 75 | - | VCC | +5V |
| 76 | I | NM1 | +5V |
| 77 | - | VSS | Ground |
| 78 | - | NC | Not connected. |
| 79 | I | \overline{RESET} | Reset input (reset at "Lo") |
| 80 | I | MD0 | MCU operation mode setting pins. The built-in ROM is effective. |
| 81 | | MD1 | |
| 82 | | MD2 | |
| 83 | - | VCC | +5V |
| 84 | - | VCC | +5V |
| 85 | - | VCC | +5V (power supply of analog circuits) |
| 86 | - | VREF | +5V (analog reference power supply) |
| 87 | - | NC | Ground (not used) |
| 88 | | NC | |
| 89 | | NC | |
| 90 | | NC | |
| 91 | - | AVSS | Ground (analog ground) |
| 92 | - | NC | Ground (not used) |
| 93 | I | VCD | Input to detect whether VCD is connected or not. Lo: CD drive connected, Hi: VCD connected. |
| 94 | - | NC | Ground (not used) |
| 95 | - | NC | Ground |
| 96 | - | VSS | Ground |
| 97 | I | $\overline{MPEGA IRQ}$ | MPEG A interrupt input (edge detection) |
| 98 | I | $\overline{MPEGV IRQ}$ | MPEG V interrupt input (edge detection) |
| 99 | - | VCC | +5V |
| 100 | I | $\overline{COMSYNC}$ | CD communications start signal input. Lo: Start, Hi: In the middle |
| 101 | I | \overline{COMREQ} | CD communications sync interrupt input (edge detection). Lo: During clock transfer, Hi: During interval. |
| 102 | - | NC | Not connected. |
| 103 | - | NC | Not connected. |
| 104 | O | DEMP | Deemphasis output. Lo: DEMP OFF, Hi: DEMP ON |
| 105 | - | NC | Not connected. |
| 106 | - | VSS | Ground |
| 107 | I | CDATA | CD communications data input (SCK0 used) |
| 108 | O | HDATA | CD communications data output (SCK0 used) |
| 109 | I | \overline{TEST} | Test control input. Lo: Test mode, Hi: Normal mode |
| 110 | O | TDATA | Test data output |
| 111 | O | COMCLK | CD communications clock output (SCK0 used) |
| 112 | O | TCLK | Clock output for test data |

SH1 BOARD IC102 DRAM


IC HM514260AJ-8 SOJ

Parts No. : 315-0947-80

IC HM514260AJ-7 SOJ

Parts No. : 315-0947-70


Top View & Pin Layout

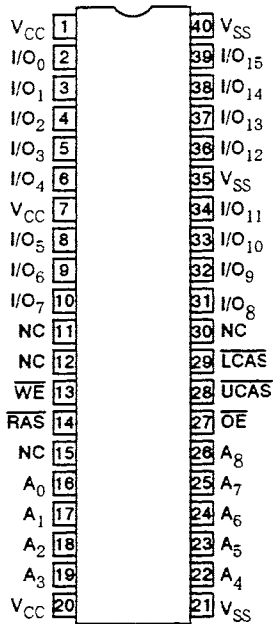

Pin Name

| Pin Name | Function |
|-------------------------|-----------------------|
| A0-A8 | address input |
| A0-A8 | Refresh address input |
| I/O1-I/O4 | Data input/output |
| $\overline{\text{RAS}}$ | Row address strobe |
| $\overline{\text{CAS}}$ | Column address strobe |
| $\overline{\text{WE}}$ | Write enable |
| $\overline{\text{OE}}$ | Output enable |
| V _{CC} | Power supply (+5V) |
| V _{SS} | Ground |

Block Diagram

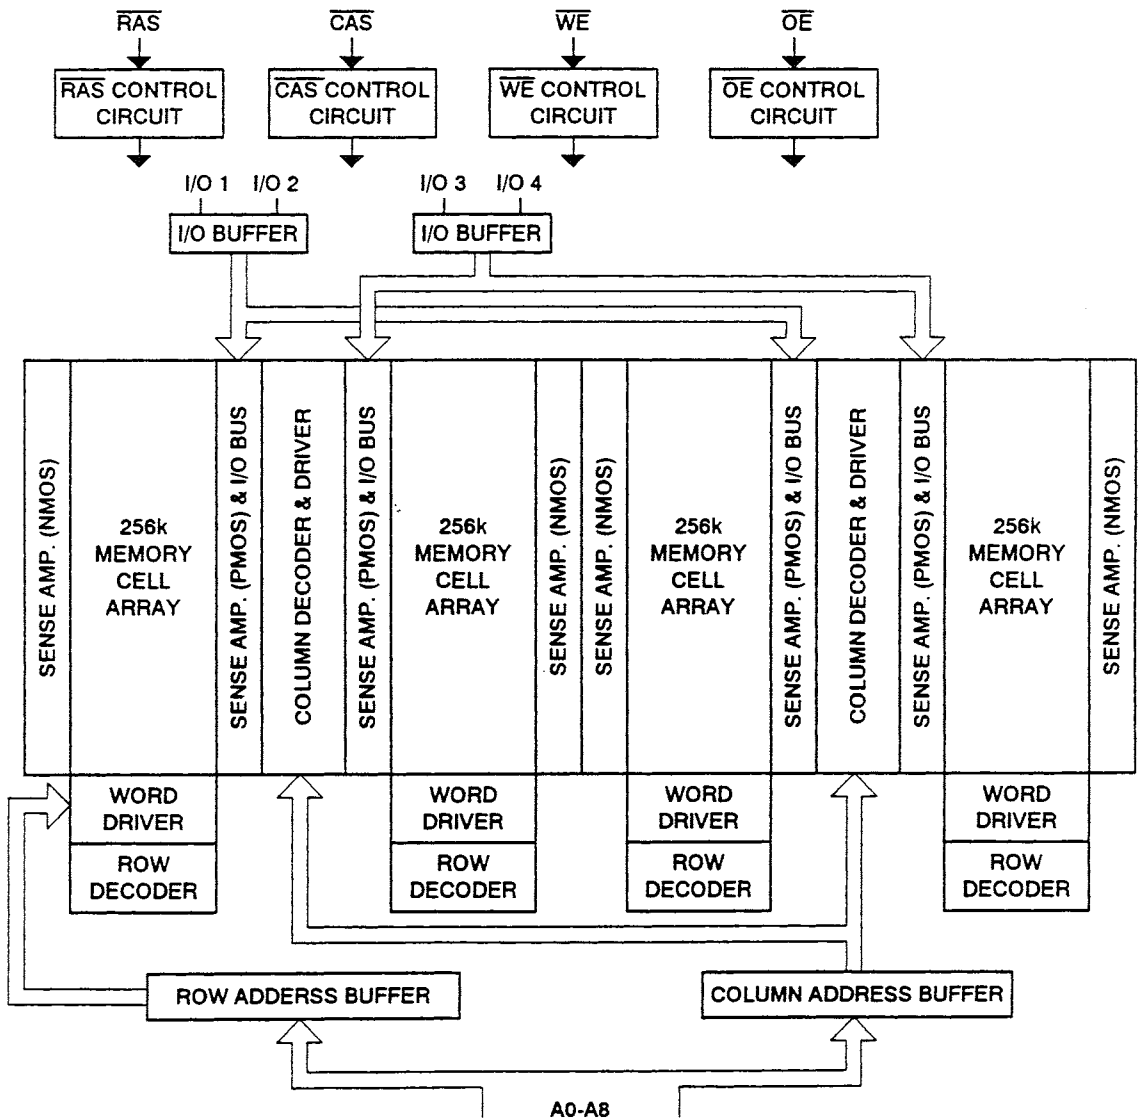


SH1 BOARD IC103


IC CUSTOM CHIP OCU YGR019A

Parts No. : 315-5873

Top View

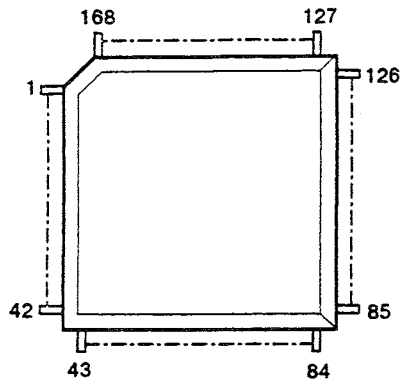

Block Diagram

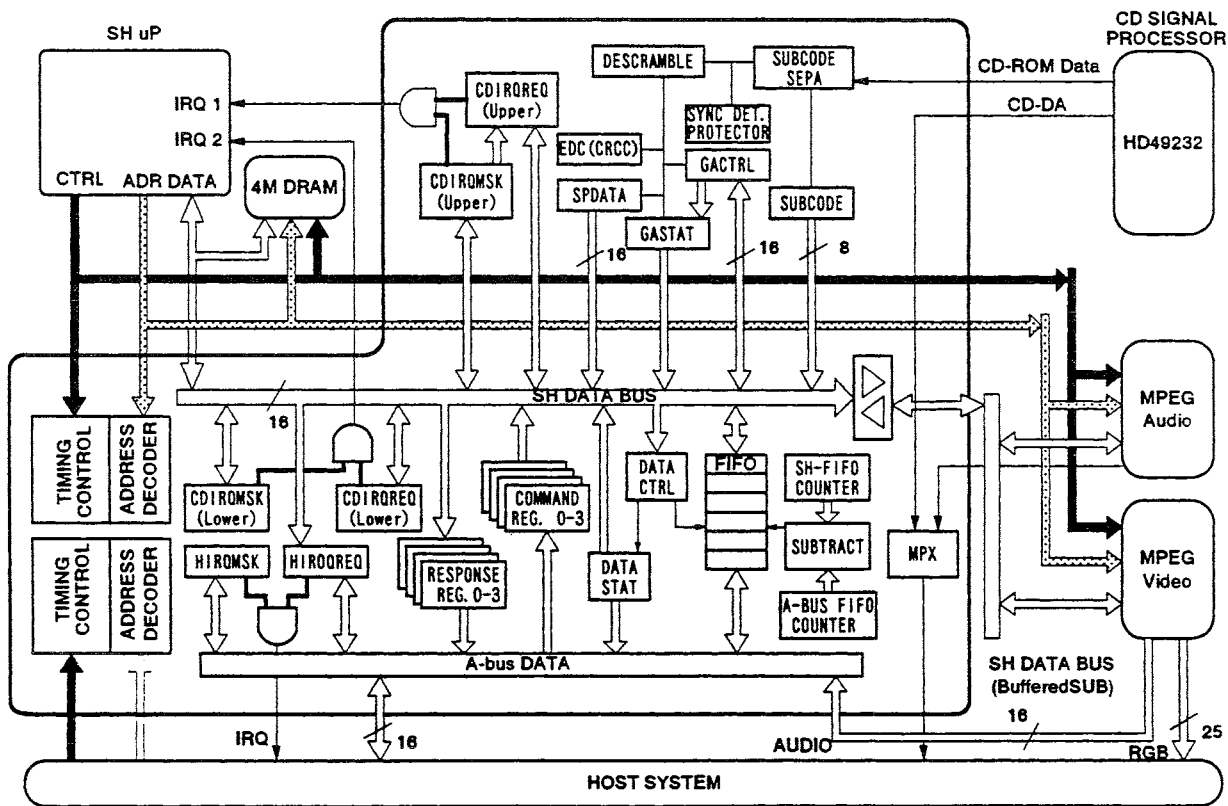

Description


| No. | I/O | Name | Function |
|-----|-----|----------|--|
| 1 | I | MVPRT | Video transparency control signal |
| 2 | I | MVR7 | Video red color data |
| 3 | | MVR6 | |
| 4 | | MVR5 | |
| 5 | | MVR4 | |
| 6 | | MVR3 | |
| 7 | - | VCC | Power supply |
| 8 | - | VSS | Ground |
| 9 | I | MVG7 | Video green color data |
| 10 | | MVG6 | |
| 11 | | MVG5 | |
| 12 | | MVG4 | |
| 13 | | MVG3 | |
| 14 | I | MVB7 | Video blue color data |
| 15 | - | VSS | Ground |
| 16 | I | MVB6 | Video blue color data |
| 17 | | MVB5 | |
| 18 | | MVB4 | |
| 19 | | MVB3 | |
| 20 | I | AA1 | A-BUS address bus |
| 21 | | AA2 | |
| 22 | | AA3 | |
| 23 | - | VSS | Ground |
| 24 | I | AA4 | A-BUS address bus |
| 25 | | AA16 | |
| 26 | | AA17 | |
| 27 | | AA18 | |
| 28 | I | ACS2 | Chip select signal from A-BUS |
| 29 | I | WTRS | Wait control signal used to transfer MPEG video frame data |
| 30 | - | VSS | Ground |
| 31 | O | FDACK | MPEG video frame data transfer control signal |
| 32 | O | MVCS | MPEG video chip select signal |
| 33 | O | MACS | MPEG audio chip select signal |
| 34 | O | TP5 | Test pin |
| 35 | - | VCC | Power supply |
| 36 | - | VSS | Ground |
| 37 | I | RESET | Gate array system reset signal |
| 38 | I | MABICK | Sync clock used to transfer MPEG audio serial data |
| 39 | I | MASDATAI | MPEG audio serial data signal |
| 40 | I | MALRCLK | Clock used to detect MPEG audio serial data L/R |
| 41 | I | TP2 | Test pin |
| 42 | I | SCS6 | SH chip select 6 |
| 43 | - | VSS | Ground |
| 44 | I | SDL0 | SH uP subdata bus |
| 45 | | SDL1 | |
| 46 | | SDL2 | |
| 47 | | SDL3 | |
| 48 | | SDL4 | |
| 49 | - | VCC | Power supply |
| 50 | - | VSS | Ground |
| 51 | I | SDL5 | SH uP subdata bus |
| 52 | | SDL6 | |
| 53 | | SDL7 | |
| 54 | | SDL8 | |
| 55 | | SDL9 | |
| 56 | | SDL10 | |

| No. | I/O | Name | Function |
|-----|-----|--------|--|
| 57 | - | VSS | Ground |
| 58 | I | SDL11 | SH uP subdata bus |
| 59 | | SDL12 | |
| 60 | | SDL13 | |
| 61 | | SDL14 | |
| 62 | | SDL15 | |
| 63 | - | VCC | Power supply |
| 64 | - | VSS | Ground |
| 65 | I | SA21 | SH uP address bus |
| 66 | | SA20 | |
| 67 | | SA4 | |
| 68 | | SA3 | |
| 69 | | SA2 | |
| 70 | I | SRD | SH uP read enable signal |
| 71 | - | VSS | Ground |
| 72 | I | SHCK | 20MHz clock |
| 73 | I | SA1 | SH uP address bus |
| 74 | I | IRQOUT | SH uP interrupt factor generation signal |
| 75 | I | SCS2 | SH uP chip select 2 |
| 76 | I | DACK1 | Channel 1 DMA transfer response |
| 77 | - | VCC | |
| 78 | - | VSS | Ground |
| 79 | I | DACK0 | Channel 0 DMA transfer response |
| 80 | I | CASH | DRAM control signal |
| 81 | | CASL | |
| 82 | I | SWRH | SH uP upper byte write enable signal |
| 83 | I | SWRL | SH uP lower byte write enable signal |
| 84 | I | SA19 | SH uP address bus |
| 85 | I | TP3 | Test pin |
| 86 | - | VSS | Ground |
| 87 | O | DSWR | Delayed write cycle control signal |
| 88 | O | DREQ1 | Channel 1 DMA transfer request |
| 89 | O | DREQ0 | Channel 0 DMA transfer request |
| 90 | I | SDH15 | SH uP main data bus |
| 91 | - | VCC | Power supply |
| 92 | - | VSS | Ground |
| 93 | I | SDH14 | SH uP main data bus |
| 94 | | SDH13 | |
| 95 | | SDH12 | |
| 96 | | SDH11 | |
| 97 | | SDH10 | |
| 98 | - | VSS | Ground |
| 99 | I | SDH9 | Power supply |
| 100 | | SDH8 | SH uP main data bus |
| 101 | | SDH7 | |
| 102 | | SDH6 | |
| 103 | | SDH5 | |
| 104 | - | VCC | Power supply |
| 105 | - | VSS | Ground |
| 106 | I | SDH4 | SH uP main data bus |
| 107 | | SDH3 | |
| 108 | | SDH2 | |
| 109 | | SDH1 | |
| 110 | | SDH0 | |
| 111 | O | SIRQH | SH uP upper byte (CD-ROM) interrupt signal |
| 112 | - | VSS | Ground |

| No. | I/O | Name | Function |
|-----|-----|--------|---|
| 113 | O | SIRQL | SH uP lower byte (A-BUS) interrupt signal |
| 114 | O | BCK | Audio serial data sync clock |
| 115 | O | LRCK | Audio L/R channel switching signal |
| 116 | - | VCC | Power supply |
| 117 | O | SD | Audio serial data |
| 118 | O | SUBCK | Subcode input clock |
| 119 | - | VCC | Power supply |
| 120 | - | VSS | Ground |
| 121 | I | CFCK0 | Frame sync signal |
| 122 | I | SUBOUT | CD subcode data |
| 123 | I | SI | Subcode block sync signal |
| 124 | I | DAS | CD-DA audio serial data |
| 125 | I | CKX | CD audio serial data sync clock |
| 126 | I | MPX | CD audio L/R channel switching signal |
| 127 | - | VSS | |
| 128 | I | C2F | C2 error flag |
| 129 | I | SMPX | CD-ROM data byte sync signal |
| 130 | I | SDAS | CD-ROM serial data |
| 131 | I | SCKX | CD-ROM serial data bit sync signal |
| 132 | - | VSS | Ground |
| 133 | - | VCC | Power supply |
| 134 | - | VSS | Ground |
| 135 | I | ATIM1 | A-BUS timing control signal |
| 136 | | ATIM0 | |
| 137 | I | ARD | A-BUS read signal |
| 138 | - | VSS | Ground |
| 139 | I | AFC0 | A-BUS timing control signal |
| 140 | I | AWR0 | A-BUS lower byte write signal |
| 141 | I | AWR1 | A-BUS upper byte write signal |
| 142 | I | AFC1 | A-BUS timing control signal |
| 143 | - | VSS | Ground |
| 144 | O | AWAIT | A-BUS wait control signal |
| 145 | O | AIRQ | A-BUS interrupt signal |
| 146 | - | T | Test signal for scan pass |
| 147 | I | AD0 | A-BUS data bus |
| 148 | | AD1 | |
| 149 | - | VCC | Power supply |
| 150 | - | VSS | Ground |
| 151 | I | AD2 | A-BUS data bus |
| 152 | | AD3 | |
| 153 | | AD4 | |
| 154 | | AD5 | |
| 155 | - | VSS | Ground |
| 156 | I | AD6 | A-BUS data bus |
| 157 | | AD7 | |
| 158 | | AD8 | |
| 159 | | AD9 | |
| 160 | | AD10 | |
| 161 | - | VCC | Power supply |
| 162 | - | VSS | Ground |
| 163 | I | AD11 | A-BUS data bus |
| 164 | | AD12 | |
| 165 | | AD13 | |
| 166 | | AD14 | |
| 167 | | AD15 | |
| 168 | - | VSS | Ground |

11. EXPLODED VIEW & PARTS LIST

11-1. Exploded View

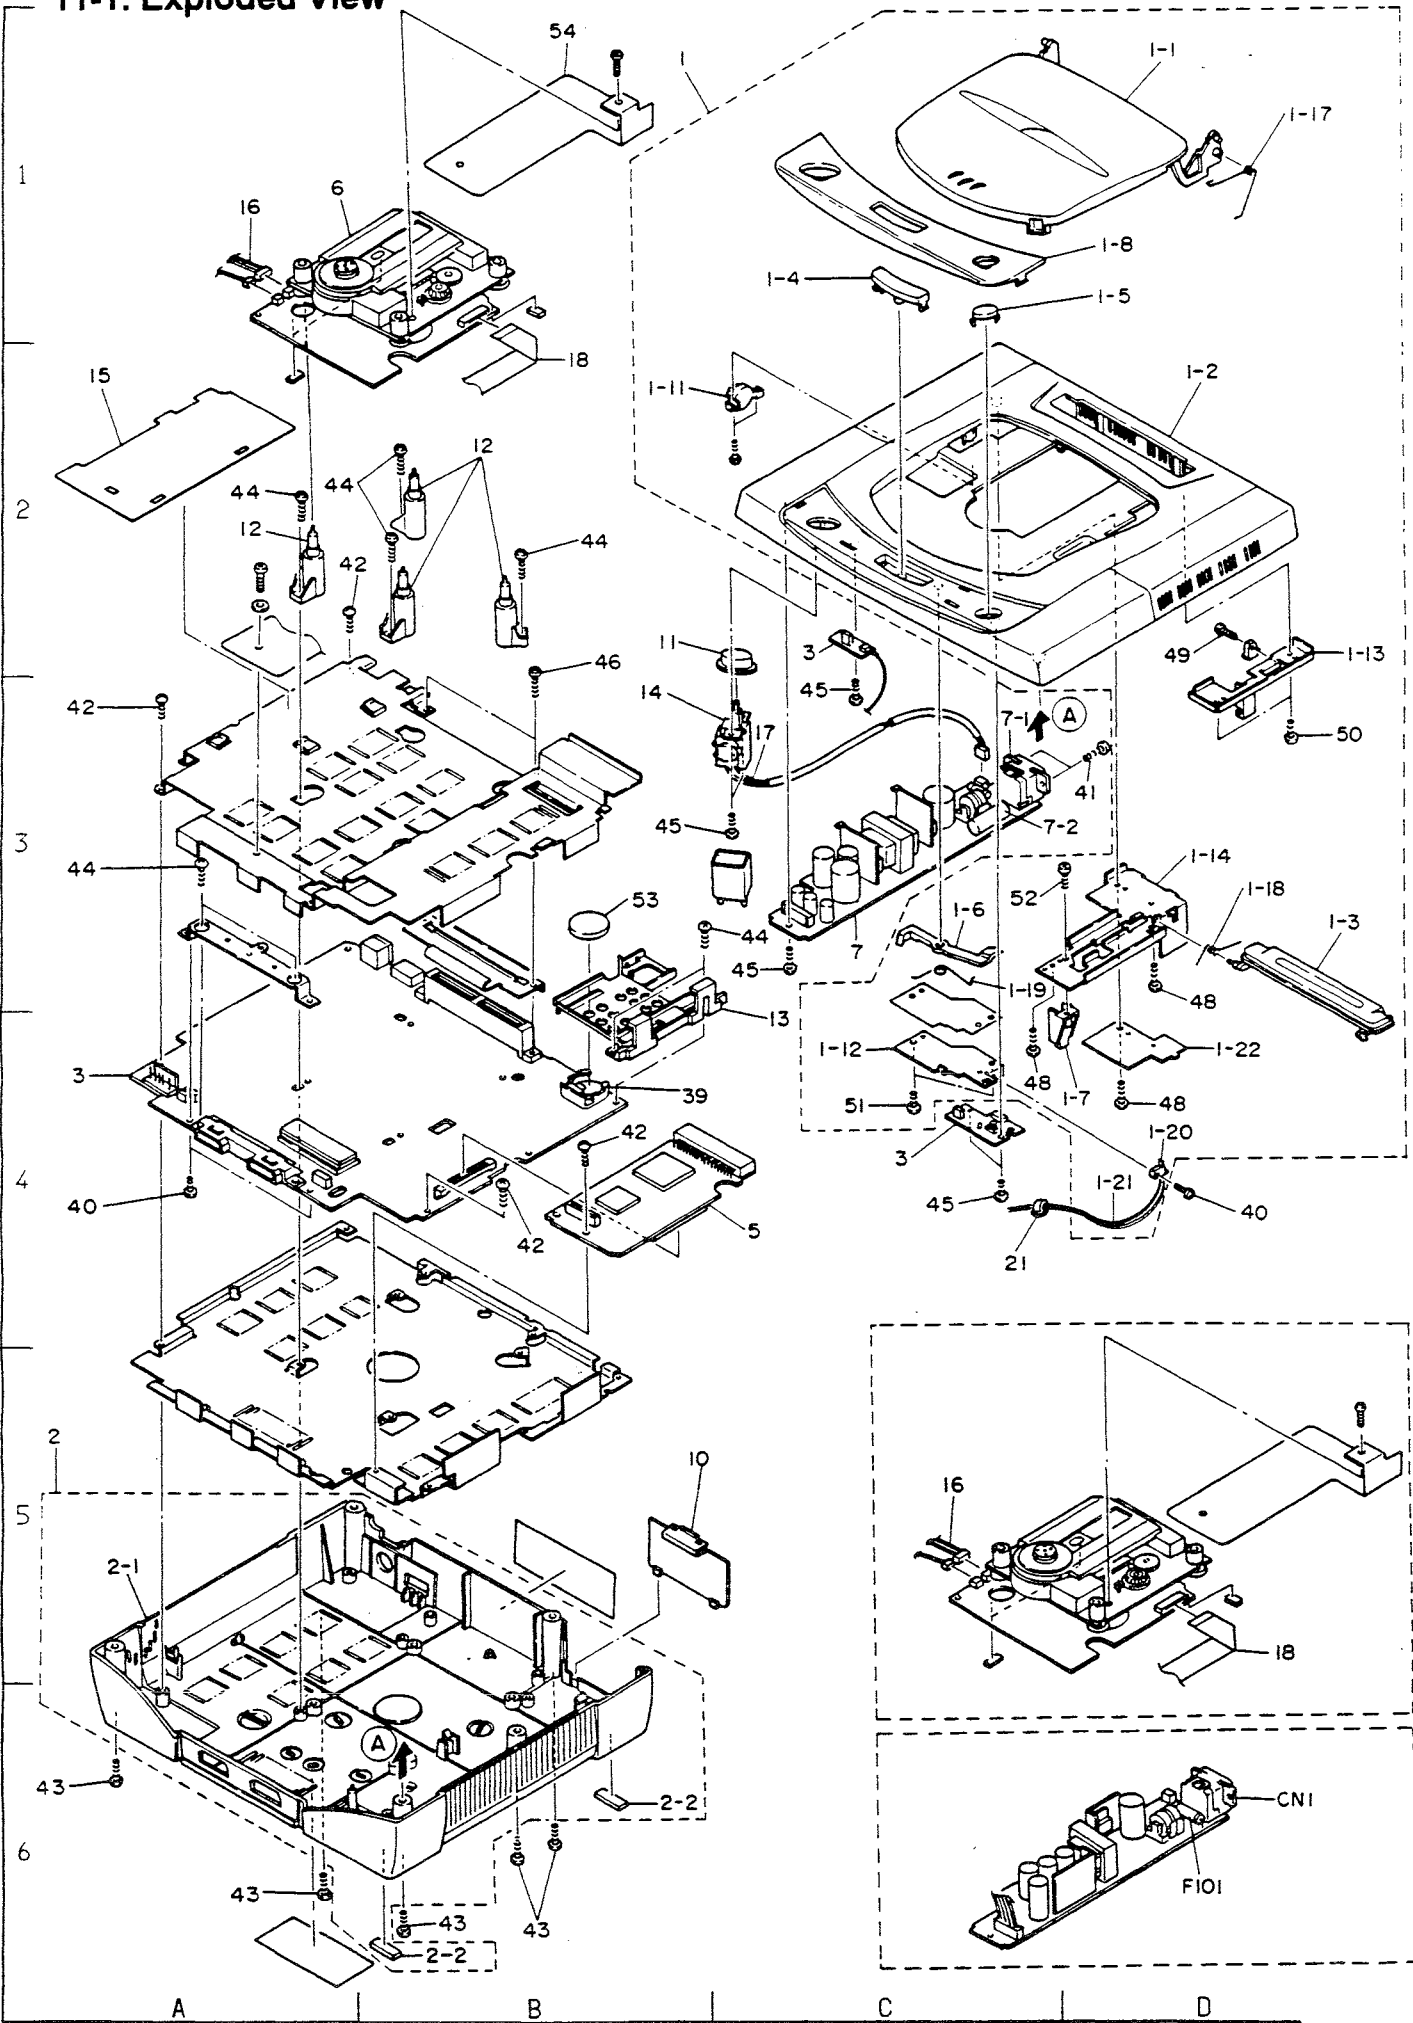

11-2. Mechanical Parts List

| Ref. No. | Parts No. | Description | Ref. No. | Parts No. | Description |
|----------|---------------|---------------------------------|----------|-----------|-----------------------------|
| 1 | 610-5862 | ASSY TOP CASE SATURN EUR [1] | 54 | 601-7815 | STAELE PROTECTION SHEET SAT |
| 1 | 610-5927 | ASSY TOP CASE SATURN AUS [2] | | | |
| 1-1 | 610-5864 | ASSY LID CD SATURN EUR | | | |
| 1-2 | 253-7015 | TOP CASE SATURN EUR | | | |
| 1-3 | 253-7013 | LID CRTG SATURN USA | | | |
| 1-4 | 253-6917-03 | BUTTON OPEN SATURN USA | | | |
| 1-5 | 253-6919-03 | BUTTON RESET SATURN USA | | | |
| 1-6 | 253-6920 | BUTTON OPEN LEVER SATURN JPN | | | |
| 1-7 | 253-7012 | MOUNT POWER UNIT PCB SAT USA | | | |
| 1-8 | 253-7010 | PANEL DEC. FRONT SATURN USA | | | |
| 1-11 | 601-7774 | OIL DUMPER SATURN | | | |
| 1-12 | 250-5404 | BRACKET LEVER SATURN JPN | | | |
| 1-13 | 250-5423 | BRACKET LID CD SPRING SAT USA | | | |
| 1-14 | 250-5424A | BRACKET LID CD HOLDER SAT USA A | | | |
| 1-17 | 125-5125 | SPRING LID CD SATURN JPN | | | |
| 1-18 | 125-5126 | SPRING LID CRTG SATURN JPN | | | |
| 1-19 | 125-5127 | SPRING ARM SATURN JPN | | | |
| 1-20 | 510-5068 | DETECTOR SW SPPB11 | | | |
| 1-21 | 600-6536 | WIRE HARN 2P FOR DETECTOR USA | | | |
| 1-22 | 601-7726 | PLATE SEVER SMALL SATURN JPN | | | |
| 2 | 610-5863 | ASSY BOTTOM CASE SATURN USA | | | |
| 2-1 | 253-7016 | BOTTOM CASE SATURN EUR | | | |
| 2-2 | 601-7658 | RUBBER FOOT SATURN JPN | | | |
| 3 | 837-11492 | ASSY IC BD SATURN VAO PAL | | | |
| 5 | 838-10834 | IC BD SATURN SH1 | | | |
| 6 | 610-5679-20 | ASSY CD DRIVE UNIT SATURN | | | |
| 6 | 610-5679-21 | | | | |
| 7 | 400-5271 | AC POWER UNIT SATURN EUR | | | |
| 7 | 400-5272 | AC POWER UNIT SATURN EUR | | | |
| △7-1 | 601-7672 | INLET FOR UL/CSA SATURN | | | |
| △7-2 | 514-5066 | FUSE 1.6A 080026 | | | |
| 10 | 253-6915-03 | LID BATTERY SATURN EUR | | | |
| 11 | 253-6918-03 | BUTTON POWER SATURN USA | | | |
| 11 | 253-6918A-03 | BUTTON POWER SATURN USA A | | | |
| 12 | 253-6921 | MOUNT MECHA SATURN JPN | | | |
| 13 | 253-6932 | SLIDE RAIL SATURN JPN | | | |
| 14 | 510-5069 | POWER SW SDDL | | | |
| 15 | 601-7979 | PLATE SEVER LARGE SATURN USA | | | |
| 16 | 600-6416 | WIRE HARN 5P FOR ST CD | | | |
| 17 | 600-6560 | WIRE HARN 2P FOR P. SW NEW | | | |
| 18 | 600-6431 | FFC 20P L=180MM | | | |
| 18 | 600-6431-01 | FFC 20P L=180MM | | | |
| 21 | 270-5094 | FERRITE CORE BP53RB120070060M | | | |
| 21 | 270-5095 | FERRITE CORE L6 T12. 5X5. 5X7 | | | |
| 38 | 250-5417 | BRACKET 9P CONN HOLDER | | | |
| 39 | 253-6922 | BAT HOLDER SATURN MATSUSHITA | | | |
| 40 | 029-000034 | B-TITE SCR PH 3X8 | | | |
| 41 | 029-000034-0B | B-TITE SCR PH BLK 3X8 | | | |
| 42 | 029-000035 | B-TITE SCR PH 3X10 | | | |
| 43 | 029-000035-0B | B-TITE SCR PH BLK 3X10 | | | |
| 44 | 029-000036 | B-TITE SCR PH 3X12 | | | |
| 45 | 029-000049 | B-TITE SCR BRH 2. 6X8 | | | |
| 46 | 029-000061 | B-TITE SCR PH 3X14 | | | |
| 47 | 029-000063 | S-TITE SCR BI H2X4 | | | |
| 48 | 029-000049 | B-TITE SCR BRH 2. 6X8 | | | |
| 49 | 029-000049-0B | B-TITE SCR BRH BLK 2. 6X8 | | | |
| 50 | 029-000052 | B-TITE SCR PH 2X8 | | | |
| 51 | 029-000067-0B | B-TITE SCR BRH BLK 2. 6X6 | | | |
| 52 | 029-000064 | S-TITE SCR PH 2X8 | | | |
| 53 | 401-0054 | BATTERY CR2032/1F | | | |

【Note】 [1]·····EUR [2]·····AUSTRALIA

11-3. Electrical Parts List

| Circuit No. | Parts No. | Description | Circuit No. | Parts No. | Description |
|---|-------------|--------------------------------|-------------|-------------|--------------------------------|
| 11-3-1. IC BD STARN MAIN VAO USA | | | | | |
| IC1 | 315-0922A | IC HD6417095F28 QFP HITACHI | IC31 | 315-0985-70 | IC UPD424260LE-70-E2 SOJ NEC |
| IC1 | 315-0998 | IC HD6417095SF28 QFP HITACHI | IC31 | 315-0986-70 | IC TC514260BJ-70 SOJ TOSHIBA |
| IC2 | 315-0922A | IC HD6417095F28 QFP HITACHI | IC31 | 315-0983-70 | IC KM416C256BJ-7 SOJ SAMSUNG |
| IC2 | 315-0998 | IC HD6417095SF28 QFP HITACHI | IC31 | 315-0984-70 | IC MB814260-70PJ-G SOJ FUJITSU |
| IC3 | 315-0928-17 | IC HM5241605TT-17 TSOP HITACHI | IC31 | 315-1030-70 | IC HY514260BJC-70 SOJ HYUNDAI |
| IC3 | 315-1022-12 | IC UPD4504161G5-A12 TSOP NEC | IC32 | 315-0947-70 | IC HM514260AJ-7 SOJ |
| IC3 | 315-0928-15 | IC HM5241605TT-15 TSOP HITACHI | IC32 | 315-0985-70 | IC UPD424260LE-70-E2 SOJ NEC |
| IC4 | 315-0928-17 | IC HM5241605TT-17 TSOP HITACHI | IC32 | 315-0986-70 | IC TC514260BJ-70 SOJ TOSHIBA |
| IC4 | 315-1022-12 | IC UPD4504161G5-A12 TSOP NEC | IC32 | 315-0983-70 | IC KM416C256BJ-7 SOJ SAMSUNG |
| IC4 | 315-0928-15 | IC HM5241605TT-15 TSOP HITACHI | IC32 | 315-0984-70 | IC MB814260-70PJ-G SOJ FUJITSU |
| IC5 | 315-5688 | IC CUSTOM CHIP SCU QFP YAMAHA | IC32 | 315-1030-70 | IC HY514260BJC-70 SOJ HYUNDAI |
| IC6 | 315-5778 | IC CUSTOM CHIP DCC QFP TOSHIBA | IC33 | 314-0634 | IC 74HC157 SOP |
| IC7 | EPR-17933 | OS SATURN IPL-ROM PAL DIP | IC34 | 313-5323 | IC UPC78L05T CHIP NEC |
| IC7 | MPR-17933 | OS SATURN IPL-ROM PAL DIP | IC34 | 313-5323-01 | IC TA78L05F CHIP TOSHIBA |
| IC8 | 315-0948-10 | IC CXK58267AM-10L SOP | IC35 | 313-5328 | IC S-80723AN-DL CHIP SEIKO |
| IC8 | 315-0930-10 | IC UPD43257B-10LL SOP | CN1 | 209-5070 | EDGE CONN 134P N630-9523-T006 |
| IC8 | 315-0964-10 | IC M5M5255BFP-12LL SOP | CN1 | 209-5070A | EDGE CONN 134P N630-9523-T006A |
| IC8 | 315-0965-10 | IC SRM20257LLM10 SOP | CN2 | 209-5074 | CONN 9P*2 CSS5018-0101R |
| IC8 | 315-1002-70 | IC UM62257M-70LL SOP | CN2XA | NOT USED | NOT USED |
| IC9 | 315-5744 | IC CUSTOM CHIP SMPC QFP | CN2XB | NOT USED | NOT USED |
| IC10 | 315-5689 | IC CUSTOM CHIP VDP1 QFP | CN3 | 212-5453 | CONN 6P B5P6-VH |
| IC10 | 315-5883 | IC CUSTOM CHIP VDP1 S QFP | CN4 | 212-5440 | CONN 100P FX6A-100S-0.8SV2 |
| IC11 | 315-0928-17 | IC HM5241605TT-17 TSOP HITACHI | CN5 | 212-5431 | MINI DIN CONN 10P FOR A/V HOSI |
| IC11 | 315-1022-12 | IC UPD4504161G5-A12 TSOP NEC | CN5 | 212-5481 | MINI DIN 10P TCS7716-432010 |
| IC11 | 315-0928-15 | IC HM5241605TT-15 TSOP HITACHI | CN5X | NOT USED | NOT USED |
| IC12 | 315-0910-12 | IC UPD4502161G5-A12 TSOP NEC | CN6 | 209-5075 | CONN 11P TCX3072-010100 HOSHID |
| IC12 | 315-1017-17 | IC HM5221605TT-17 TSOP HITACHI | CN8 | 212-5454 | CONN 5P B4(5)B-PH-K-S |
| IC12 | 315-1012-17 | IC LC382161T-17 TSOP SANYO | CN9 | 212-5454 | CONN 5P B4(5)B-PH-K-S |
| IC13 | 315-0910-12 | IC UPD4502161G5-A12 TSOP NEC | CN10 | NOT USED | NOT USED |
| IC13 | 315-1017-17 | IC HM5221605TT-17 TSOP HITACHI | CN11 | NOT USED | NOT USED |
| IC13 | 315-1012-17 | IC LC382161T-17 TSOP SANYO | CN12 | 212-5457 | CONN 3P SJ21-03WT |
| IC14 | 315-5690 | IC CUSTOM CHIP VDP2 QFP YAMAHA | SW3 | 510-5063 | TACT SW SKEYAC ALPS |
| IC14 | 315-5690-02 | IC CUSTOM CHIP VDP2 QFP HH | D1 | 481-5072 | DIODE CHIP 1SS184 TOSHIBA |
| IC14 | 315-5890 | IC CUSTOM CP VDP2 S QFP YAMAHA | D2 | 481-5168 | DIODE CHIP HRW0202A HITACHI |
| IC15 | 315-0910-12 | IC UPD4502161G5-A12 TSOP NEC | D2 | 481-5199 | DIODE CHIP 1SS377 TOSHIBA |
| IC15 | 315-1017-17 | IC HM5221605TT-17 TSOP HITACHI | D2 | 481-5201 | DIODE CHIP RB415D ROHM |
| IC15 | 315-1012-17 | IC LC382161T-17 TSOP SANYO | D3 | 481-5168 | DIODE CHIP HRW0202A HITACHI |
| IC16 | 315-0910-12 | IC UPD4502161G5-A12 TSOP NEC | D3 | 481-5199 | DIODE CHIP 1SS377 TOSHIBA |
| IC16 | 315-1017-17 | IC HM5221605TT-17 TSOP HITACHI | D3 | 481-5201 | DIODE CHIP RB415D ROHM |
| IC16 | 315-1012-17 | IC LC382161T-17 TSOP SANYO | D4 | 481-5072 | DIODE CHIP 1SS184 TOSHIBA |
| IC17 | 315-5687 | IC CUSTOM CHIP SCSP QFP YAMAHA | D5 | 481-5179 | DIODE CHIP MA153A MATSUSHITA |
| IC18 | 315-0941 | IC MC68ECC00FN12 PLCC MOTOROLA | D6 | 481-5168 | DIODE CHIP HRW0202A HITACHI |
| IC19 | 315-0777-80 | IC HM514270AJ-8 SOJ HITACHI | D6 | 481-5199 | DIODE CHIP 1SS377 TOSHIBA |
| IC19 | 315-0739-70 | IC UPD424270LE-70 SOJ NEC | D6 | 481-5201 | DIODE CHIP RB415D ROHM |
| IC19 | 315-0777-70 | IC HM514270AJ-7 SOJ HITACHI | TR1 | 482-5126 | XSTR 2SC1623 L5..7 CHIP NEC |
| IC19 | 315-0822-80 | IC MN414270SJ-08 SOJ PANASONIC | TR2 | 482-5125-01 | XSTR 2SA812 CHIP M5..6 NEC |
| IC20 | 315-5746 | IC CUSTOM CHIP PLL HQFP | TR3 | 482-5260 | XSTR 2SD2114K(V.W)CHIP ROHM |
| IC21 | 313-5314 | IC CXA1645M SOP SONY | TR4 | 482-5260 | XSTR 2SD2114K(V.W)CHIP ROHM |
| IC22 | 313-5313 | IC TDA1386T SOP PHILIPS | L1 | 180-5137 | CHIP INDUCTOR 100UH 10% KOA |
| IC23 | 314-0632 | IC 74VHC04 SOP 300MIL | L1 | 180-5137-01 | P. COIL CHIP 100UH ELJFA101KF |
| IC24 | 314-0632 | IC 74VHC04 SOP 300MIL | L2 | 180-5137 | CHIP INDUCTOR 100UH 10% KOA |
| IC25 | 313-5322 | IC S-80741AL-A5 CHIP SEIKO | L2 | 180-5137-01 | P. COIL CHIP 100UH ELJFA101KF |
| IC26 | 314-0563 | IC 74LS245 SOP 300MIL | L3 | 180-5142 | P. COIL CHIP 100UH LQH3C101K04 |
| IC27 | 314-0563 | IC 74LS245 SOP 300MIL | L3 | 180-5142-01 | P. COIL CHIP 100UH NLF3C22522T |
| IC28 | 314-0649 | IC 74ACT245 SOP 300MIL | L4 | 180-5142 | P. COIL CHIP 100UH LQH3C101K04 |
| IC29 | 314-0563 | IC 74LS245 SOP 300MIL | L4 | 180-5142-01 | P. COIL CHIP 100UH NLF3C22522T |
| IC30 | 314-0563 | IC 74LS245 SOP 300MIL | L5 | 180-5142 | P. COIL CHIP 100UH LQH3C101K04 |
| IC31 | 315-0947-70 | IC HM514260AJ-7 SOJ | L5 | 180-5142-01 | P. COIL CHIP 100UH NLF3C22522T |

| Circuit No. | Parts No. | Description | Circuit No. | Parts No. | Description |
|-------------|---------------|--------------------------------|-------------|-----------|-------------------------------|
| L6 | 180-5142 | P. COIL CHIP 100UH LQH3C101K04 | C11 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| L6 | 180-5142-01 | P. COIL CHIP 100UH NLFC322522T | C12 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| L8 | 180-5142 | P. COIL CHIP 100UH LQH3C101K04 | C13 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| L8 | 180-5142-01 | P. COIL CHIP 100UH NLFC322522T | C14 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| L9 | 180-5142 | P. COIL CHIP 100UH LQH3C101K04 | C15 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| L9 | 180-5142-01 | P. COIL CHIP 100UH NLFC322522T | C16 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| L10 | 180-5142 | P. COIL CHIP 100UH LQH3C101K04 | C17 | NOT USED | NOT USED |
| L10 | 180-5142-01 | P. COIL CHIP 100UH NLFC322522T | C18 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| FB3 | NOT USED | NOT USED | C19 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| FB4 | 476-2330-J-10 | RES CHIP 33 OHM 1/10W 5% | C20 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| FB5 | NOT USED | NOT USED | C21 | 151-0307 | CAP CER CP 0.022UF 50V ZF2125 |
| FB6 | NOT USED | NOT USED | C22 | 151-0307 | CAP CER CP 0.022UF 50V ZF2125 |
| FB7 | NOT USED | NOT USED | C23 | 151-0621 | CAP CER CP 30PF 50V JCH2125 |
| FB8 | NOT USED | NOT USED | C24 | 151-0621 | CAP CER CP 30PF 50V JCH2125 |
| FB9 | NOT USED | NOT USED | C25 | 151-0305 | CAP CER CP 1000PF 50V KB2125 |
| FB10 | NOT USED | NOT USED | C26 | 151-0521 | CAP CER CP 470PF 50V SL2125 |
| FB13 | NOT USED | NOT USED | C27 | 151-0318 | CAP CER CHIP 33PF 50V CH2125 |
| FB15 | NOT USED | NOT USED | C28 | 151-0307 | CAP CER CP 0.022UF 50V ZF2125 |
| FB16 | NOT USED | NOT USED | C29 | 151-0307 | CAP CER CP 0.022UF 50V ZF2125 |
| FB17 | NOT USED | NOT USED | C30 | 151-0478 | CAP CER CP 27PF 50V CH2125 |
| FB18 | 479-5005-0000 | RES CHIP 0 OHM 1/10W 2125 | C31 | 151-0377 | CAP CER CP 100PF 50V KCH2125 |
| EM12 | 271-0045 | EMI FILTER STB101KB TAIYO | C32 | 151-0307 | CAP CER CP 0.022UF 50V ZF2125 |
| EM13 | 271-0045 | EMI FILTER STB101KB TAIYO | C33 | NOT USED | NOT USED |
| EM15 | 271-0045 | EMI FILTER STB101KB TAIYO | C34 | NOT USED | NOT USED |
| EM16 | 271-0045 | EMI FILTER STB101KB TAIYO | C35 | 151-0320 | CAP CER CP 68PF 50V J CH2125 |
| EM17 | 271-0045 | EMI FILTER STB101KB TAIYO | C36 | NOT USED | NOT USED |
| EM18 | 271-0045 | EMI FILTER STB101KB TAIYO | C37 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM19 | 271-0045 | EMI FILTER STB101KB TAIYO | C38 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM110 | 271-0045 | EMI FILTER STB101KB TAIYO | C39 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM111 | 271-0045 | EMI FILTER STB101KB TAIYO | C40 | 151-0270 | CAP CER CP 47PF 50V KSL2125 |
| EM112 | 271-0045 | EMI FILTER STB101KB TAIYO | C41 | 151-0592 | CAP CER CP 5PF/50V CCH2125 |
| EM113 | 271-0045 | EMI FILTER STB101KB TAIYO | C42 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM114 | 271-0045 | EMI FILTER STB101KB TAIYO | C43 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM115 | 271-0045 | EMI FILTER STB101KB TAIYO | C44 | 151-0361 | CAP CER CP 15PF 50V CH2125 |
| EM116 | 271-0045 | EMI FILTER STB101KB TAIYO | C45 | NOT USED | NOT USED |
| EM117 | 271-0045 | EMI FILTER STB101KB TAIYO | C46 | NOT USED | NOT USED |
| EM118 | 271-0045 | EMI FILTER STB101KB TAIYO | C47 | 151-0318 | CAP CER CHIP 33PF 50V CH2125 |
| EM119 | 271-0045 | EMI FILTER STB101KB TAIYO | C48 | NOT USED | NOT USED |
| EM120 | 271-0045 | EMI FILTER STB101KB TAIYO | C49 | NOT USED | NOT USED |
| EM121 | 271-0045 | EMI FILTER STB101KB TAIYO | C50 | 151-0319 | CAP CER CHIP 20PF 50V CH2125 |
| EM122 | 271-0045 | EMI FILTER STB101KB TAIYO | C51 | 151-0319 | CAP CER CHIP 20PF 50V CH2125 |
| EM123 | 271-0045 | EMI FILTER STB101KB TAIYO | C52 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM124 | 271-0045 | EMI FILTER STB101KB TAIYO | C53 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM125 | 271-0045 | EMI FILTER STB101KB TAIYO | C54 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM126 | 271-0045 | EMI FILTER STB101KB TAIYO | C55 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM127 | 271-0045 | EMI FILTER STB101KB TAIYO | C56 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM128 | 271-0045 | EMI FILTER STB101KB TAIYO | C57 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM129 | 271-0045 | EMI FILTER STB101KB TAIYO | C58 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM130 | 271-0045 | EMI FILTER STB101KB TAIYO | C59 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM131 | 271-0045 | EMI FILTER STB101KB TAIYO | C60 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM132 | 271-0045 | EMI FILTER STB101KB TAIYO | C61 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM133 | 271-0045 | EMI FILTER STB101KB TAIYO | C62 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| EM134 | 271-0045 | EMI FILTER STB101KB TAIYO | C63 | 151-0305 | CAP CER CP 1000PF 50V KB2125 |
| EM135 | 271-0045 | EMI FILTER STB101KB TAIYO | C64 | 151-0305 | CAP CER CP 1000PF 50V KB2125 |
| C1 | 151-0307 | CAP CER CP 0.022UF 50V ZF2125 | C65 | NOT USED | NOT USED |
| C2 | 151-0521 | CAP CER CP 470PF 50V SL2125 | C66 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| C3 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | C67 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| C4 | 151-0307 | CAP CER CP 0.022UF 50V ZF2125 | C68 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| C5 | 151-0521 | CAP CER CP 470PF 50V SL2125 | C69 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| C6 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | C70 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| C7 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | C71 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| C8 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | C72 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| C9 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | C73 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| C10 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | C74 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| | | | C75 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| | | | C76 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |
| | | | C77 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 |

| Circuit No. | Parts No. | Description | Circuit No. | Parts No. | Description |
|-------------|-------------|--------------------------------|-------------|-------------|--------------------------------|
| C78 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE4 | 151-0622 | CAP CER CP 1UF 16V ZF3216 |
| C79 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE6 | 150-0313-04 | CAP E CP 100UF6.3V MV6.3VC100M |
| C80 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE6 | 150-0313-01 | CAP E CP 100UF 6.3V ECEVOJA101 |
| C81 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE6 | 150-0313-03 | CAP E CP 100UF6.3V UWXOJ101MCR |
| C82 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE6 | 150-0313-05 | CAP E CP 100UF 6.3V REV |
| C83 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE15 | 150-0464 | CAP E CP 10UF16V MV16VC10MD55 |
| C84 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE15 | 150-0464-01 | CAP E CP 10UF 16V ECEV1CA100 |
| C85 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE15 | 150-0464-02 | CAP E CP 10UF 16V UWX1C100MCR1 |
| C86 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE15 | 150-0464-03 | CAP E CP 10UF16V REV |
| C87 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE16 | 150-0464 | CAP E CP 10UF16V MV16VC10MD55 |
| C88 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE16 | 150-0464-01 | CAP E CP 10UF 16V ECEV1CA100 |
| C89 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE16 | 150-0464-02 | CAP E CP 10UF 16V UWX1C100MCR1 |
| C90 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE16 | 150-0464-03 | CAP E CP 10UF16V REV |
| C91 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE18 | 150-0313-04 | CAP E CP 100UF6.3V MV6.3VC100M |
| C92 | NOT USED | NOT USED | CE18 | 150-0313-01 | CAP E CP 100UF 6.3V ECEVOJA101 |
| C93 | NOT USED | NOT USED | CE18 | 150-0313-03 | CAP E CP 100UF6.3V UWXOJ101MCR |
| C94 | NOT USED | NOT USED | CE18 | 150-0313-05 | CAP E CP 100UF 6.3V REV |
| C95 | NOT USED | NOT USED | CE19 | 150-0313-04 | CAP E CP 100UF6.3V MV6.3VC100M |
| C96 | 151-0270 | CAP CER CP 47PF 50V KSL2125 | CE19 | 150-0313-01 | CAP E CP 100UF 6.3V ECEVOJA101 |
| C97 | NOT USED | NOT USED | CE19 | 150-0313-03 | CAP E CP 100UF6.3V UWXOJ101MCR |
| C98 | NOT USED | NOT USED | CE19 | 150-0313-05 | CAP E CP 100UF 6.3V REV |
| C99 | NOT USED | NOT USED | CE20 | 150-0464 | CAP E CP 10UF16V MV16VC10MD55 |
| C102 | NOT USED | NOT USED | CE20 | 150-0464-01 | CAP E CP 10UF 16V ECEV1CA100 |
| C103 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE20 | 150-0464-02 | CAP E CP 10UF 16V UWX1C100MCR1 |
| C104 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE20 | 150-0464-03 | CAP E CP 10UF16V REV |
| C105 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE21 | 150-0464 | CAP E CP 10UF16V MV16VC10MD55 |
| C106 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE21 | 150-0464-01 | CAP E CP 10UF 16V ECEV1CA100 |
| C107 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE21 | 150-0464-02 | CAP E CP 10UF 16V UWX1C100MCR1 |
| C108 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE21 | 150-0464-03 | CAP E CP 10UF16V REV |
| C109 | 151-0298 | CAP CER CP 100PF 50V JSL2125 | CE22 | 150-0496 | CAP E CP 4.7UF 25V MV25VC4R7M |
| C110 | 151-0298 | CAP CER CP 100PF 50V JSL2125 | CE22 | 150-0496-01 | CAP E CP 4.7UF 25V ECEV1EA4R7 |
| C111 | 151-0592 | CAP CER CP 5PF/50V CCH2125 | CE22 | 150-0496-02 | CAP E CP 4.7UF25V UWX1E4R7MCR1 |
| C112 | NOT USED | NOT USED | CE22 | 150-0496-03 | CAP E CP 4.7UF25V REV |
| C114 | NOT USED | NOT USED | CE23 | 150-0464 | CAP E CP 10UF16V MV16VC10MD55 |
| C115 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE23 | 150-0464-01 | CAP E CP 10UF 16V ECEV1CA100 |
| C116 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE23 | 150-0464-02 | CAP E CP 10UF 16V UWX1C100MCR1 |
| C117 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE23 | 150-0464-03 | CAP E CP 10UF16V REV |
| C118 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE24 | 150-0423 | CAP E CP 220UF 4V MV4VC220MF55 |
| C119 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE24 | 150-0423-01 | CAP E CP 220UF 4V ECEVOGA221 |
| C120 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE24 | 150-0423-02 | CAP E CP 220UF 4V UWXOG221MCR1 |
| C121 | 151-0298 | CAP CER CP 100PF 50V JSL2125 | CE24 | 150-0423-03 | CAP E CP 220UF 4V REV |
| C122 | 151-0298 | CAP CER CP 100PF 50V JSL2125 | CE25 | 150-0423 | CAP E CP 220UF 4V MV4VC220MF55 |
| C123 | 151-0298 | CAP CER CP 100PF 50V JSL2125 | CE25 | 150-0423-01 | CAP E CP 220UF 4V ECEVOGA221 |
| C124 | 151-0298 | CAP CER CP 100PF 50V JSL2125 | CE25 | 150-0423-02 | CAP E CP 220UF 4V UWXOG221MCR1 |
| C125 | NOT USED | NOT USED | CE25 | 150-0423-03 | CAP E CP 220UF 4V REV |
| C126 | NOT USED | NOT USED | CE26 | 150-0423 | CAP E CP 220UF 4V MV4VC220MF55 |
| C127 | 151-0265 | CAP CER CP 0.1UF 25V ZF2125 | CE26 | 150-0423-01 | CAP E CP 220UF 4V ECEVOGA221 |
| C129 | 151-0320 | CAP CER CP 68PF 50V J CH2125 | CE26 | 150-0423-02 | CAP E CP 220UF 4V UWXOG221MCR1 |
| C130 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE26 | 150-0423-03 | CAP E CP 220UF 4V REV |
| C131 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE27 | 150-0423 | CAP E CP 220UF 4V MV4VC220MF55 |
| C132 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE27 | 150-0423-01 | CAP E CP 220UF 4V ECEVOGA221 |
| C133 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE27 | 150-0423-02 | CAP E CP 220UF 4V UWXOG221MCR1 |
| C134 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE27 | 150-0423-03 | CAP E CP 220UF 4V REV |
| C135 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE28 | 150-0423 | CAP E CP 220UF 4V MV4VC220MF55 |
| C136 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE28 | 150-0423-01 | CAP E CP 220UF 4V ECEVOGA221 |
| C137 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE28 | 150-0423-02 | CAP E CP 220UF 4V UWXOG221MCR1 |
| C138 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE28 | 150-0423-03 | CAP E CP 220UF 4V REV |
| C139 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE29 | 150-0423 | CAP E CP 220UF 4V MV4VC220MF55 |
| C140 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE29 | 150-0423-01 | CAP E CP 220UF 4V ECEVOGA221 |
| C141 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE29 | 150-0423-02 | CAP E CP 220UF 4V UWXOG221MCR1 |
| CE1 | 151-0623 | CAP CER CP 1UF 16V ZF2125 | CE29 | 150-0423-03 | CAP E CP 220UF 4V REV |
| CE2 | 151-0622 | CAP CER CP 1UF 16V ZF3216 | CE30 | 150-0505-02 | CAP E CP 220UF10V UUR1A221MBR |
| CE3 | 150-0313-04 | CAP E CP 100UF6.3V MV6.3VC100M | CE31 | 150-0464 | CAP E CP 10UF16V MV16VC10MD55 |
| CE3 | 150-0313-01 | CAP E CP 100UF 6.3V ECEVOJA101 | | | |
| CE3 | 150-0313-03 | CAP E CP 100UF6.3V UWXOJ101MCR | | | |
| CE3 | 150-0313-05 | CAP E CP 100UF 6.3V REV | | | |

| Circuit No. | Parts No. | Description | Circuit No. | Parts No. | Description |
|-------------|---------------|---------------------------------|-------------|---------------|---------------------------|
| CE31 | 150-0464-01 | CAP E CP 10UF 16V ECEV1CA100 | R21 | 476-2222-J-10 | RES CHIP 2.2KOHM 1/10W 5% |
| CE31 | 150-0464-02 | CAP E CP 10UF 16V UWX1C100MCR1 | R22 | 476-2111-J-10 | RES CHIP 110 OHM 1/10W 5% |
| CE31 | 150-0464-03 | CAP E CP 10UF16V REV | R24 | 476-2303-J-10 | RES CHIP 30KOHM 1/10W 5% |
| CE32 | 153-0120 | CAP TANT CHIP 10UF 6.3V NEC | R25 | 476-2303-J-10 | RES CHIP 30KOHM 1/10W 5% |
| CE32 | 153-0120-01 | CAP TANT CHIP 10UF 6.3V PANA | R26 | 476-2362-J-10 | RES CHIP 3.6KOHM 1/10W 5% |
| CE32 | 153-0120-02 | CAP TANT CHIP 10UF 6.3V N1CH1 | R27 | 476-2363-J-10 | RES CHIP 36KOHM 1/10W 5% |
| CE32 | 153-0120-03 | CAP TANT CHIP 10UF 6.3V TOWA | R28 | 476-2621-J-10 | RES CHIP 620 OHM 1/10W 5% |
| CE33 | 150-0494 | CAP E CP 22UF 6.3V MV6.3VC22M | R29 | NOT USED | NOT USED |
| CE33 | 150-0494-01 | CAP E CP 22UF 6.3V ECEVOJA220 | R30 | 476-2102-J-10 | RES CHIP 1KOHM 1/10W 5% |
| CE33 | 150-0494-02 | CAP E CP 22UF6.3V UWX0J220MCR1 | R31 | 476-2102-J-10 | RES CHIP 1KOHM 1/10W 5% |
| CE33 | 150-0494-03 | CAP E CP 22UF 6.3V REV | R32 | 476-2102-J-10 | RES CHIP 1KOHM 1/10W 5% |
| CE34 | 150-0494 | CAP E CP 22UF 6.3V MV6.3VC22M | R33 | 476-2222-J-10 | RES CHIP 2.2KOHM 1/10W 5% |
| CE34 | 150-0494-01 | CAP E CP 22UF 6.3V ECEVOJA220 | R35 | 476-2473-J-10 | RES CHIP 47KOHM 1/10W 5% |
| CE34 | 150-0494-02 | CAP E CP 22UF6.3V UWX0J220MCR1 | R36 | 476-2750-J-10 | RES CHIP 75 OHM 1/10W 5% |
| CE34 | 150-0494-03 | CAP E CP 22UF 6.3V REV | R37 | 476-2750-J-10 | RES CHIP 75 OHM 1/10W 5% |
| CE35 | 150-0501 | CAP E CP 47UF 6.3V MV6.3VC47M | R38 | 476-2750-J-10 | RES CHIP 75 OHM 1/10W 5% |
| CE35 | 150-0501-01 | CAP E CP 47UF 6.3V ECEVOJA470 | R39 | 476-2750-J-10 | RES CHIP 75 OHM 1/10W 5% |
| CE35 | 150-0501-02 | CAP E CP 47UF6.3V UWX0J470MCR1 | R40 | 476-2750-J-10 | RES CHIP 75 OHM 1/10W 5% |
| CE35 | 150-0501-03 | CAP E CP 47UF 6.3V REV | R41 | 476-2750-J-10 | RES CHIP 75 OHM 1/10W 5% |
| CE37 | 150-0464 | CAP E CP 10UF16V MV16VC10MD55 | R42 | 476-2163-F-10 | RES CHIP 16KOHM 1/10W 1% |
| CE37 | 150-0464-01 | CAP E CP 10UF 16V ECEV1CA100 | R43 | 476-2101-J-10 | RES CHIP 100 OHM 1/10W 5% |
| CE37 | 150-0464-02 | CAP E CP 10UF 16V UWX1C100MCR1 | R44 | 476-2101-J-10 | RES CHIP 100 OHM 1/10W 5% |
| CE37 | 150-0464-03 | CAP E CP 10UF16V REV | R45 | 476-2104-J-10 | RES CHIP 100KOHM 1/10W 5% |
| CE38 | NOT USED | NOT USED | R46 | 476-2104-J-10 | RES CHIP 100KOHM 1/10W 5% |
| CE42 | 150-0464 | CAP E CP 10UF 16V MV16VC10MD55 | R47 | 476-2472-J-10 | RES CHIP 4.7KOHM 1/10W 5% |
| CE42 | 150-0464-01 | CAP E CP 10UF 16V ECEV1CA100 | R48 | 476-2201-J-10 | RES CHIP 200 OHM 1/10W 5% |
| CE42 | 150-0464-02 | CAP E CP 10UF 16V UWX1C100MCR1 | R49 | 476-2472-J-10 | RES CHIP 4.7KOHM 1/10W 5% |
| CE42 | 150-0464-03 | CAP E CP 10UF 16V REV | R50 | 476-2472-J-10 | RES CHIP 4.7KOHM 1/10W 5% |
| CE45 | 150-0504 | CAP E 330UF USR0J331MCA1TD | R56 | 476-2472-J-10 | RES CHIP 4.7KOHM 1/10W 5% |
| CE46 | 150-0504 | CAP E 330UF USR0J331MCA1TD | R67 | 476-2105-J-10 | RES CHIP 1MOHM 1/10W 5% |
| CE47 | 150-0463 | CAP E CP 1UF 50V MV50VC1MD55 | R68 | 476-2334-J-10 | RES CHIP 330KOHM 1/10W 5% |
| CE47 | 150-0463-01 | CAP E CP 1UF 50V ECEV1HA010 | R69 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE47 | 150-0463-02 | CAP E CP 1UF 50V UWX1H010MCR1 | R74 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE47 | 150-0463-03 | CAP E CP 1UF 50V REV | R96 | NOT USED | NOT USED |
| CE48 | 150-0463 | CAP E CP 1UF 50V MV50VC1MD55 | R97 | NOT USED | NOT USED |
| CE48 | 150-0463-01 | CAP E CP 1UF 50V ECEV1HA010 | R98 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE48 | 150-0463-02 | CAP E CP 1UF 50V UWX1H010MCR1 | R99 | NOT USED | NOT USED |
| CE48 | 150-0463-03 | CAP E CP 1UF 50V REV | R100 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE49 | 150-0501 | CAP E CP 47UF 6.3V MV6.3VC47M | R101 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE49 | 150-0501-01 | CAP E CP 47UF 6.3V ECEVOJA470 | R102 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE49 | 150-0501-02 | CAP E CP 47UF 6.3V UWX0J470MCR1 | R103 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE49 | 150-0501-03 | CAP E CP 47UF 6.3V REV | R104 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE50 | 150-0501 | CAP E CP 47UF 6.3V MV6.3VC47M | R105 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE50 | 150-0501-01 | CAP E CP 47UF 6.3V ECEVOJA470 | R106 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE50 | 150-0501-02 | CAP E CP 47UF 6.3V UWX0J470MCR1 | R107 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE50 | 150-0501-03 | CAP E CP 47UF 6.3V REV | R108 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE52 | 150-0464 | CAP E CP 10UF 16V MV16VC10MD55 | R109 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE52 | 150-0464-01 | CAP E CP 10UF 16V ECEV1CA100 | R110 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE52 | 150-0464-02 | CAP E CP 10UF 16V UWX1C100MCR1 | R111 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE52 | 150-0464-03 | CAP E CP 10UF 16V REV | R112 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE53 | 150-0501 | CAP E CP 47UF 6.3V MV6.3VC47M | R113 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| CE53 | 150-0501-01 | CAP E CP 47UF 6.3V ECEVOJA470 | R114 | NOT USED | NOT USED |
| CE53 | 150-0501-02 | CAP E CP 47UF 6.3V UWX0J470MCR1 | R115 | NOT USED | NOT USED |
| CE53 | 150-0501-03 | CAP E CP 47UF 6.3V REV | R116 | NOT USED | NOT USED |
| CE54 | 150-0520-03 | CAP E CP 100UF 10V UWX1AMCR1 | R117 | NOT USED | NOT USED |
| CE54 | 150-0522-03 | CAP E CP 100UF 10V UUR1A101MCR | R118 | NOT USED | NOT USED |
| R1 | 476-2101-J-10 | RES CHIP 100 OHM 1/10W 5% | R119 | NOT USED | NOT USED |
| R2 | 476-2101-J-10 | RES CHIP 100 OHM 1/10W 5% | R120 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| R3 | 476-2101-J-10 | RES CHIP 100 OHM 1/10W 5% | R121 | NOT USED | NOT USED |
| R4 | 476-2302-J-10 | RES CHIP 3KOHM 1/10W 5% | R122 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% |
| R5 | 476-2302-J-10 | RES CHIP 3KOHM 1/10W 5% | R124 | 476-2472-J-10 | RES CHIP 4.7KOHM 1/10W 5% |
| R19 | 476-2105-J-10 | RES CHIP 1MOHM 1/10W 5% | R125 | 476-2472-J-10 | RES CHIP 4.7KOHM 1/10W 5% |
| R20 | 476-2680-J-10 | RES CHIP 68 OHM 1/10W 5% | R126 | 476-2101-J-10 | RES CHIP 100 OHM 1/10W 5% |
| | | | R127 | 476-2101-J-10 | RES CHIP 100 OHM 1/10W 5% |
| | | | R128 | 476-2101-J-10 | RES CHIP 100 OHM 1/10W 5% |
| | | | R129 | 476-2101-J-10 | RES CHIP 100 OHM 1/10W 5% |
| | | | R130 | 476-2101-J-10 | RES CHIP 100 OHM 1/10W 5% |

| Circuit No. | Parts No. | Description | Circuit No. | Parts No. | Description |
|--|---------------|-------------------------------|-------------|---------------|--------------------------------|
| R131 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% | JP7 | NOT USED | NOT USED |
| R132 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% | JP8 | NOT USED | NOT USED |
| R133 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% | JP9 | NOT USED | NOT USED |
| R134 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% | JP10 | NOT USED | NOT USED |
| R135 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% | | | |
| R136 | 476-2361-J-10 | RES CHIP 360 OHM 1/10W 5% | JP11 | NOT USED | NOT USED |
| R137 | 476-2104-J-10 | RES CHIP 100KOHM 1/10W 5% | JP12 | NOT USED | NOT USED |
| R138 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% | JP13 | NOT USED | NOT USED |
| R139 | NOT USED | NOT USED | JP14 | 514-5069 | RES CHIP 0 OHM 1/10W 2125 |
| R140 | 476-2301-J-10 | RES CHIP 300 OHM 1/10W 5% | JP15 | 514-5069 | RES CHIP 0 OHM 1/10W 2125 |
| R141 | 476-2512-J-10 | RES CHIP 5.1KOHM 1/10W 5% | JP16 | 514-5069 | RES CHIP 0 OHM 1/10W 2125 |
| R142 | 476-2222-J-10 | RES CHIP 2.2KOHM 1/10W 5% | JP17 | 514-5069 | RES CHIP 0 OHM 1/10W 2125 |
| R143 | 476-2511-J-10 | RES CHIP 510 OHM 1/10W 5% | JP18 | NOT USED | NOT USED |
| R144 | 476-2511-J-10 | RES CHIP 510 OHM 1/10W 5% | JP19 | NOT USED | NOT USED |
| R145 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% | JP20 | 476-2102-J-10 | RES CHIP 1KOHM 1/10W 5% |
| R146 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% | JP21 | NOT USED | NOT USED |
| R147 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% | JP22 | NOT USED | NOT USED |
| R148 | 476-2391-J-10 | RES CHIP 390 OHM 1/10W 5% | IC SOCKET | 213-0113 | IC SOCKET 40PIN ICE-406-S-TG T |
| R149 | 476-2224-J-10 | RES CHIP 220KOHM 1/10W 5% | BS HOL R | 029-000034-0B | B-TITE SCR PH BLK 3X8R |
| R150 | 476-2511-J-10 | RES CHIP 510 OHM 1/10W 5% | BS HOL L | 029-000034-0B | B-TITE SCR PH BLK 3X8R |
| R151 | 476-2511-J-10 | RES CHIP 510 OHM 1/10W 5% | FUSE | 600-6458 | JUMPER WIRE L=10MM |
| R152 | 476-2103-J-10 | RES CHIP 10KOHM 1/10W 5% | | | |
| R153 | NOT USED | NOT USED | | | |
| R154 | NOT USED | NOT USED | | | |
| R155 | NOT USED | NOT USED | | | |
| R156 | NOT USED | NOT USED | | | |
| R157 | NOT USED | NOT USED | | | |
| R158 | NOT USED | NOT USED | | | |
| R160 | 479-5005-0000 | RES CHIP 0 OHM 1/10W 2125 | | | |
| RA1 | 477-0170 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA1 | 477-0170-02 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA1 | 477-0170-01 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA2 | 477-0170 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA2 | 477-0170-02 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA2 | 477-0170-01 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA3 | 477-0170 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA3 | 477-0170-02 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA3 | 477-0170-01 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA4 | 477-0170 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA4 | 477-0170-02 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA4 | 477-0170-01 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA5 | 477-0170 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA5 | 477-0170-02 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA5 | 477-0170-01 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA6 | 477-0170 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA6 | 477-0170-02 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA6 | 477-0170-01 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA7 | 477-0170 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA7 | 477-0170-02 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA7 | 477-0170-01 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA8 | 477-0170 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA8 | 477-0170-02 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| RA8 | 477-0170-01 | R-PK CP 8*10KOHM 1/16W 5% W/C | | | |
| X1 | 230-5202 | OSC XTAL 17.7344MHZ +-20PPM | | | |
| X2 | NOT USED | NOT USED | | | |
| X3 | 230-5169 | CERAMIC RESONATOR CST4.00MGW | | | |
| X4 | 230-5170-01 | XTAL 32.768KHZ +-20PPM SEIKO | | | |
| JP1 | NOT USED | NOT USED | | | |
| JP2 | 476-2104-J-10 | RES CHIP 100KOHM 1/10W 50% | | | |
| JP3 | NOT USED | NOT USED | | | |
| JP4 | NOT USED | NOT USED | | | |
| JP5 | NOT USED | NOT USED | | | |
| JP6 | NOT USED | NOT USED | | | |
| 11-3-2. SATURN POWER INDICATOR BD VAO | | | | | |
| CN13 | 600-6452 | | | | WIRE HARN 2P FOR POWER LED |
| LD1 | 390-5511 | | | | LED SLB-25MG GREEN |
| 11-3-3. SATURN R.SW BD VAO | | | | | |
| LD2 | 390-5568 | | | | LED SLB-25DL13F ORANGE |
| SW1 | 510-5063 | | | | TACT SW SKEYAC |
| CN14 | 600-6451 | | | | WIRE HARN 5P FOR RESET BT |
| 11-3-4. PC BD SH1 FOR SATURN | | | | | |
| IC101 | 315-5785 | | | | IC CUSTOM CHIP SH1 QFP |
| IC101 | 315-5785A | | | | IC CUSTOM CHIP SH1A QFP |
| IC102 | 315-0947-80 | | | | IC HM514260AJ-8 SOJ |
| IC103 | 315-5873 | | | | IC CUSTOM CHIP OCU YGR019A |
| E101 | 212-5473 | | | | CONN 100P FX6-100P-0.8SV2 |
| E102 | 212-5474 | | | | CONN 20P SD-52610-2017 |
| L101 | NOT USED | | | | NOT USED |
| C101 | NOT USED | | | | NOT USED |
| C102 | NOT USED | | | | NOT USED |
| C103 | 151-0430 | | | | CAP CER CP 10PF 50V CH1608 |
| C104 | 151-0430 | | | | CAP CER CP 10PF 50V CH1608 |
| C105 | 151-0418 | | | | CAP CER CP 0.01UF/50V BK1608 |
| C106 | 151-0418 | | | | CAP CER CP 0.01UF/50V BK1608 |
| C107 | 151-0418 | | | | CAP CER CP 0.01UF/50V BK1608 |
| C108 | NOT USED | | | | NOT USED |
| C109 | 151-0418 | | | | CAP CER CP 0.01UF/50V BK1608 |
| C110 | NOT USED | | | | NOT USED |
| C111 | 151-0418 | | | | CAP CER CP 0.01UF/50V BK1608 |
| C112 | NOT USED | | | | NOT USED |
| C113 | NOT USED | | | | NOT USED |
| C114 | NOT USED | | | | NOT USED |
| C115 | 151-0418 | | | | CAP CER CP 0.01UF/50V BK1608 |
| C116 | NOT USED | | | | NOT USED |
| C117 | NOT USED | | | | NOT USED |
| C118 | 151-0418 | | | | CAP CER CP 0.01UF/50V BK1608 |
| C119 | 151-0418 | | | | CAP CER CP 0.01UF/50V BK1608 |
| C120 | 151-0418 | | | | CAP CER CP 0.01UF/50V BK1608 |

11-4. Accessories/Package List

| Circuit No. | Parts No. | Description | No. | Parts No. | Description |
|-------------|---------------|-------------------------------|-----|-------------|-----------------------------------|
| C121 | 150-0501 | CAP E CP 47UF 6.3V MV6.3VC47M | 1 | 610-5861 | ASSY CP SAT EUR |
| C122 | NOT USED | NOT USED | | | |
| C123 | 151-0418 | CAP CER CP 0.01UF/50V BK1608 | 2 | 600-6540 | RGB CABLE SATURN PAL [A, B] |
| C124 | NOT USED | NOT USED | 2 | 600-6540-01 | RGB CABLE SATURN PAL V2 [A, B] |
| C125 | NOT USED | NOT USED | | | |
| | | | 3 | 610-5865 | RF UNIT STURN TOWA PAL-G/I [C] |
| C126 | NOT USED | NOT USED | | | |
| C127 | NOT USED | NOT USED | 4 | 600-6537 | AC CABLE SATURN PLUG=MF [A] |
| C128 | NOT USED | NOT USED | 4 | 600-6538 | AC CABLE SATURN PLUG=C [B] |
| C129 | NOT USED | NOT USED | 4 | 600-6538-01 | AC CABLE SATURN PLUG=C [B] |
| C130 | NOT USED | NOT USED | 4 | 600-6571 | AC CABLE SATURN PLUG=S [C] |
| C131 | NOT USED | NOT USED | 5 | 672-2359A | MANUAL HARD SATURN MULTI A [A, B] |
| C132 | NOT USED | NOT USED | 5 | 672-2359B | MANUAL HARD SATURN MULTI B [A, B] |
| | | | 5 | 672-2450A | MANUAL HARD SATURN AUS A [C] |
| R101 | 476-1103-J-16 | RES CHIP 10KOHM 1/16W 5% | 6 | SGM-4349 | POLY BAG 340*340*0.05 EXP 6 |
| R102 | 476-1103-J-16 | RES CHIP 10KOHM 1/16W 5% | 7 | SGM-4363 | POLY BAG 200*310*0.05 EXP 6 |
| R103 | 476-1103-J-16 | RES CHIP 10KOHM 1/16W 5% | | | |
| R104 | 476-1103-J-16 | RES CHIP 10KOHM 1/16W 5% | | | |
| R105 | 476-1103-J-16 | RES CHIP 10KOHM 1/16W 5% | | | |
| R106 | 476-1472-J-16 | RES CHIP 4.7KOHM 1/16W 5% | | | |
| R107 | 476-1472-J-16 | RES CHIP 4.7KOHM 1/16W 5% | | | |
| R108 | 476-1472-J-16 | RES CHIP 4.7KOHM 1/16W 5% | | | |
| R109 | 476-1222-J-16 | RES CHIP 2.2KOHM 1/16W 5% | | | |
| R110 | 476-1472-J-16 | RES CHIP 4.7KOHM 1/16W 5% | | | |
| R111 | NOT USED | NOT USED | | | |
| R112 | NOT USED | NOT USED | | | |
| R113 | 476-1330-J-16 | RES CHIP 33 OHM 1/16W 5% | | | |
| R114 | NOT USED | NOT USED | | | |
| R115 | NOT USED | NOT USED | | | |
| R116 | NOT USED | NOT USED | | | |
| R117 | NOT USED | NOT USED | | | |
| R118 | NOT USED | NOT USED | | | |
| R119 | NOT USED | NOT USED | | | |
| RM101 | 477-0141-01 | R-PK CP 4*330HM 1/16W 5% | | | |
| RM102 | 477-0141-01 | R-PK CP 4*330HM 1/16W 5% | | | |
| RM103 | 477-0141-01 | R-PK CP 4*330HM 1/16W 5% | | | |
| RM104 | 477-0141-01 | R-PK CP 4*330HM 1/16W 5% | | | |
| X101 | 230-5196 | XTAL 20MHZ SMD-49 | | | |
| CN1 | 209-5077 | EDGE CONN 100P N630-9523-T005 | | | |

【Note】 [A].....UK
 [B].....SOE
 [C].....AUSTRALIA

SEGA™