




Slasher Installation Instruction




Never stand between tractor and slasher while backing the tractor up to the hitch!


1. Attach the slasher to tractor's three point hitch as following;

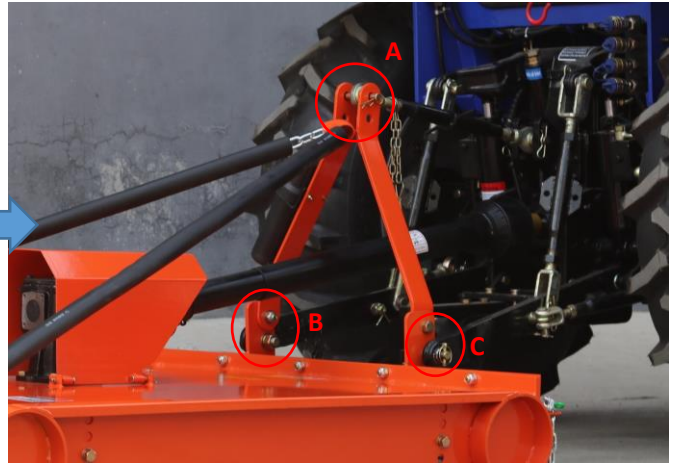

2. Install Back Safe Chains as following;

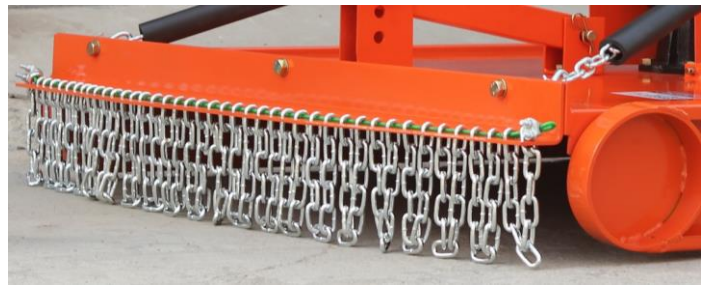

3. Install Clutch Cover on the top of the slasher using link pins as following;

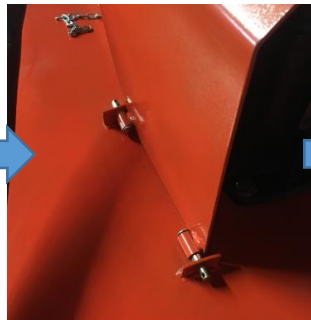

4. Install back wheel using link pin and spring pins as following;





5. Install side plate on both side of the slasher and adjust the height as following:



6. Install the PTO shaft on slasher and tractor;

a) Prepare the PTO shaft with clutch. Refer below;



b) Install the PTO shaft on the Tractor. Refer below;



c) Install the PTO shaft on the Slasher gearbox. Refer below;



d) Pull shaft on the tractor side of the PTO shaft yoke to be sure it has locked in place. Repeat this same process for the PTO shaft connection to the slasher. Also check PTO shaft has been greased before operating slasher;

7. Check gearbox oil level. Add 300-500ml gearoil in the slasher gearbox before operating slasher;

8. Check and ensure blade bores and nuts are not damaged and tight before operating slasher;

9. Check all bolts and nuts are tightened correctly and all hitch pins are securely locked before operating slasher.

10. Refer below for some pictures of installed or packed slashers:

