

Advanced White Louver Fixture

AWLF2217

Features

- Increases even light distribution
- Ideal for use in commercial, school, government, or other office or retail buildings
- Designed for use in any 2'x4' T-bar grid ceiling
- High Efficiency T8 fixture helps to meet or exceed energy regulation standards such as LEED, California Title 24, and others



Electrical Components

- All ballasts and lamp holders are UL and CSA listed
- Ballasts are Class P Thermally Protected, Type 1 Outdoor, Class A Sound Rated
- Suitable for damp locations
- Quick Disconnect
- Lamps and ballasts warranted through their respective manufacturer
- UL listed to US and Canadian safety standards

Construction

- Housing is die formed 22 ga. cold rolled steel treated with highly reflective powder coat
- The louver frame and center support are constructed of steel that has been treated with a highly reflective powder coated finish
- The cross-braces are built from a highly reflective powder coated aluminum and have a ribbed finish to help increase its aesthetic appeal
- The socket bars, made from steel, are treated with a powder coat finish
- The latches are equipped with a positive locking system to prevent premature door opening
- The hinges are reinforced to increase strength

Ordering Options


Example: AWLF2217-IL-L1735

Kit	Dimensions/Watts	Ballast Type (120v-277v or Custom)	Lamps				
			Wattage	Color			
AWLF2217	2' X 2' (2-Lamp T8)	IS, High-Efficiency, Low BF (.78)	IL	17W	L17	3500K	35
		IS, High-Efficiency, Normal BF (.88)	IN			4100K	41
		Programmed Start, Low BF (.71)	PL			Custom	CU
		Programmed Start, Normal BF (.88)	PN				
		Custom	CU				

Advanced White Louver Fixture

AWLF2217


Dimensions

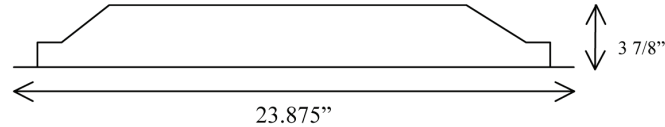

System	Input Wattage	Mean Lumens	Energy Savings vs.	
			3:FB34T12	4:F20T12
2:FB34T12 STD Magnetic Ballast @ 58% LER Parabolic	82	2,436	--	Baseline
2:F20T12 STD Magnetic Ballast @ 58% LER Parabolic	53	1,218	Baseline	--
2:FO17/XPS QHE ISN @ 81.8% LER AWLR	29	1,929	45%	65%
2:FO17/XPS QHE3X ISN @ 81.8% LER AWLR	34	2,192	36%	59%

Photometrics

AWLF2217-IN-2- L1441, ITL Report FO17T8/841K/XPS/ECO 1400 Lumens

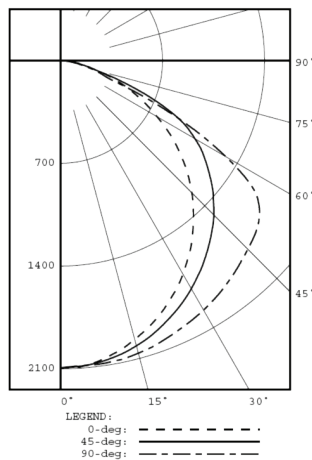

Candela Distribution Summary			
	0°	45°	90°
0°	802	802	802
5°	794	797	802
15°	749	768	790
25°	677	714	761
35°	584	641	730
45°	469	556	693
55°	341	453	628
65°	210	303	307
75°	96	94	83
85°	23	22	15
90°	0	0	0

Pcc	Coefficients of Utilization											
	Effective Floor Cavity Reflectance 20%											
	80			70			50			50		
Pw	70	50	30	10	70	50	30	10	50	30	10	
0	97	97	97	97	95	95	95	95	91	91	91	
1	89	86	82	80	87	84	81	78	80	78	76	
2	82	75	70	65	79	74	69	64	71	66	63	
3	74	66	59	54	72	65	59	54	62	57	53	
4	68	58	51	46	66	57	51	46	55	49	45	
5	62	52	45	39	61	51	44	39	49	43	39	
6	58	47	39	34	56	46	39	34	45	38	34	
7	53	42	35	30	52	42	35	30	40	34	30	
8	50	39	32	27	48	38	31	27	37	31	27	
9	46	35	29	24	45	35	28	24	34	28	24	
10	43	33	26	22	42	32	26	22	31	26	22	

Zonal Lumen Summary			
Zone	Lumens	% Lamp	% Fixture
0-30°	624	22.3	27.3
0-40°	1031	36.8	45.0
0-60°	1889	67.4	82.5
0-90°	2289	81.8	100.0

Luminance Data in Candela/Sq. M			
	Avg 0°	Avg 45°	Avg 90°
45°	2283	2707	3374
55°	2047	2719	3769
65°	1711	2468	2501
75°	1277	1250	1104
85°	909	869	593

Fixture Efficiency: 81.8%