
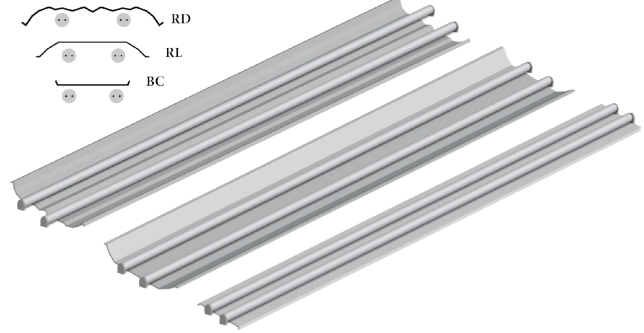


Adjustable Strip Retrofit Kit

ALADJ

Features

- Energy savings alternative for 4' or 8' strip fixtures
- Adjustable 4 1/4" or 5" Socket Bars
- Custom profiles and sizes upon request
- Simple installation



Application

- Universal 4 1/4" or 5" one, two, four or six lamp reflector/ballast cover retrofit kit for commercial, industrial and retail facilities
- Maximize efficiency and light levels by upgrading existing 8' or 4' strip fixtures

Installation

For retrofit, the existing ballast, socket bars and ballast cover(s) are removed. Mount new ballasts and connect ballast to sockets. Bend tabs on socket bar either for 4 1/4" or 5" channel and install brackets using the supplied self-tapping screws. Install the new ballast cover(s) or reflector(s) to the socket bars by the supplied quarter turns. Install lamps.

Technical Data

Socket Bars:

- 20 ga. cold-rolled steel
- Pre-punched for lamp holders and wire passage-way
- Powder coated for durability and appearance

Ballast Covers:

- 24 ga. steel
- Highly reflective paint
- Protective pre-mask is applied to painted exterior

Reflector:

The reflector can be ordered in a 24 ga. white painted steel or .020" high quality aluminum. Aluminum can be ordered in either a 95% reflective enhanced finish or 91% reflective white enamel. A protective pre-mask is applied to all reflective surfaces prior to manufacture.

Components:

- All ballasts and lamp holders are UL listed
- Ballasts are class P Thermally Protected
- All kit components are UL Classified to US and Canadian safety standards
- Lamps and ballasts warranted through their respective manufacturer

Ordering Options Example: AL8ADJ-4-T8-IN-BCS

<u>Kit</u>	<u>Lamp Quantity</u>	<u>Lamp Type</u>	<u>Ballast Type</u> (120v-277v or Custom)	<u>Reflector Material</u>	<u>Ballast Cover</u>	<u>Channel Width</u>	<u>Options</u>
1x8 AL8ADJ	1	T8	Instant Start, High Efficiency, Low BF (.78)	IL 95% Specular	RLA95	Steel BCS	Standard Specify Lamps
1x4 AL4ADJ	2	T5	Instant Start, High-Efficiency, Normal BF (.88)	IN 91% White	RLAW	Custom	CU
			Instant Start, High-Efficiency, High BF (≥1.15)	IH Steel White	RLS		
			Programmed Start, Low BF (.71)	PL 95% Specular	RDA95		
			Programmed Start, Normal BF (.88)	PN 91% White	RDAW		
			Programmed Start, High BF (≥1.15)	PH			
			Custom	CU			



(801) 972-9530
 advanced@advlight.com
 www.advlight.com