


ZE Quick Disconnect

ALQD

Features

- Easily cuts off power to reduce the risk of shock during luminaire ballast replacement

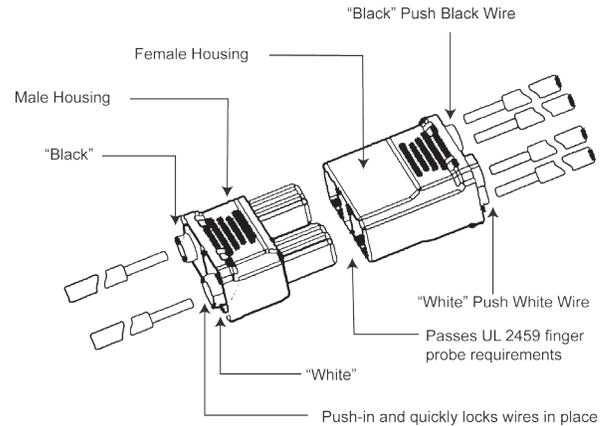

Construction

Housing: Nylon
Contacts: Copper
Color: Orange
Temperature: 105°C
Flammability: UL 94V-2

Specifications

Max. Current Rating

3.0 A 120VAC
0.75 A 480VAC
1.3 A 277VAC
0.6 A 600VAC
1.04 A 347VAC

Wire Range

Male Housing 18-12AWG
Female Housing 12-112AWG

Other

Strip Length: 10mm
Mating/Unmating Force: 3-8lb
Agency Approvals: UL cUL
One-Time Use Only
ROHS Certified