
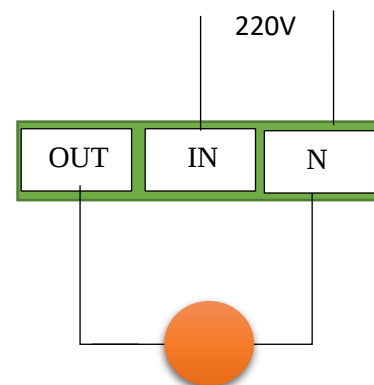


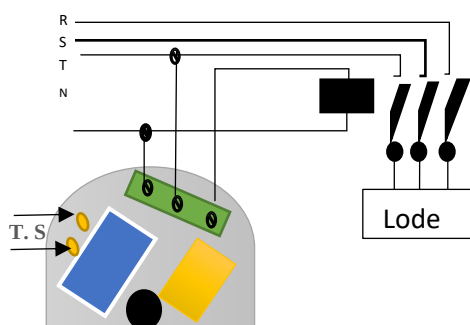

TECHNICAL SPECIFICATIONS

Type	Pe -220 / Pe -110 / Pe -48
OPERATING VOLTAGE (UN)	220 / 110 V A.C - 48 V (A.C/ D.C)
OPERATING RANGE VOLTAGE	(0.8 -1 UN)
OPERATING FREQUENCY	50 / 60 HZ
CONTACT OUTPUT	250 V A.C 10 A / 24 V (A.C -D.C) 10A
DELAY TIME	30 Sec
PROTECTION CLASS	IP 25 - IP 43 - IP 65
Connections	socket
PLASTIC MATERIAL	V 0 UNINFLAMMABLE
OPERATING TEMPERATURE	- 25 C + 65 C
SETTING LUXE RANGE	(7-10) LUXE ON 30 Sec
POWER LED (P.L)	Yellow collar
ACTION LED (A.L)	Weight collar
WEIGHT	75 gr.

Setting Luxe - range : (7 -10 LUX

Step 1 Connect (T. S) and ON (supply 220V) 30 sec (P.L & A.L) ON)

Step 2 Cut OFF (T. S) and OFF (supply 220V) (A L) OFF

