

Ultrasonic Flowmeter - Non Contact



Features

Ultrasonic flow meter uses the time difference principle of ultrasonic wave propagation in the medium to measure the flow rate

Mainly used to measure liquid, such as ultra-pure liquid, chemical, raw sewage, reclaimed water, cooling water, river water, plant sewage, etc.

Used for High Temperature Flow Measurements

Huge line size, Massive storage of Flowdata, Enabled with our CONNECT+ IoT Software Platform



CONNECT+
IoT Solution Enabled

Labtech Electronics Private Limited

1/3, Kundrathur High Road, Periyapanicheri
Chennai-600128, TamilNadu, India
sales@labtech.co.in, www.labtech.co.in
+91 9840909211, 044-48605048







- UF 5000 is a wall-mount, clamp-on type ultrasonic flow meter which uses the transfer time technology. Designed using **FPGA chip** and low-voltage broadband pulse transmission. Both Clamp on type sensors and Insertion type sensors are available.
- UF 5000 has a **240*128 back lit LCD** with 4 line menu display and also the clear, user-friendly menu selections make flow meter more simple and convenient to use. Daily, monthly and yearly totalized flow.
- Parallel operation of positive, negative and net flow totalizes with scale factor (span) and BTU Capacity. While the output of totalize pulse and frequency output are transmitted via relay and open collector.



External clamping flow meter sensor, simple and convenient installation, high flexibility;
 Integrated design and manufacturing, no need to connect their own,
 the true meaning of IP68 waterproof;
 Hidden pipe design, more beautiful after installation;

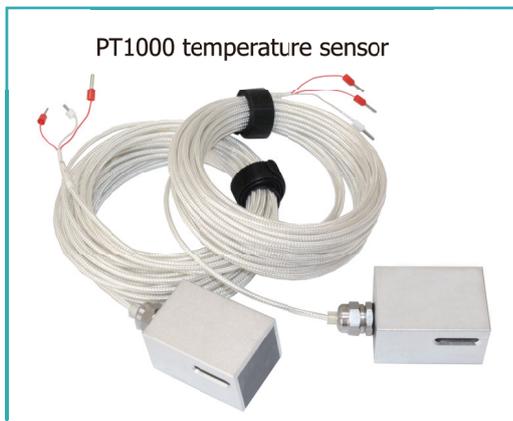

PT1000 temperature sensor

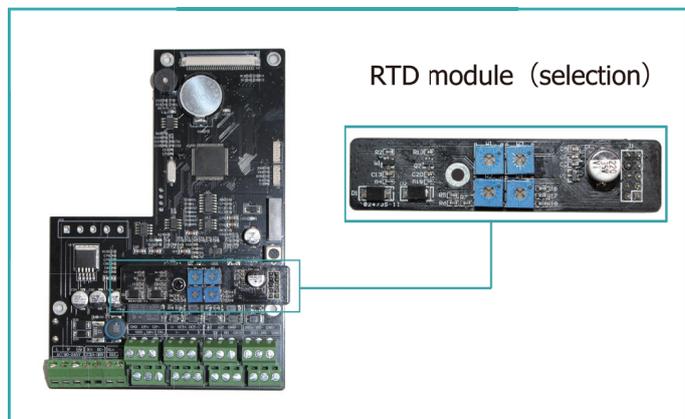

RTD module (selection)

The UF 5000 can be used in conjunction with the RTD module and the PT1000 temperature sensor to become an energy meter for measuring the heat and cold consumption of heating pipelines and air-conditioning refrigeration pipelines:

The PT1000 uses high-temperature resistance lines, imported movements, and its sensitivity and working conditions durability are much higher than those of domestic PT100.

Specification

Performance

Flow range	±0.09ft/s ~ ±39ft/s (±0.03m/s ~ ±12m/s)
Accuracy	±1% of measured value
Repeatability	0.2% of measured value
Linearity	±1%
Pipe size	DN25mm~DN1200mm(A pair of sensors)

Function


Outputs	Analog output: 4~20mA, max load 750Ω. Pulse output: 0~10KHz
Communication	RS232/RS485 Modbus
Power supply	10~36VDC/AC90~245V
Display	240*128 backlit LCD
Temperature	Transmitter: -14°F~140°F(-20°C~60°C) Transducer:-40°F~176°F(-40°C~80°C,TT01) Transducer:-40°F~266°F(-40°C~130°C,TT03)
Humidity	Up to 99% RH,non-condensing

Physical


Transmitter	PC/ABS,IP65
Transducer	Encapsulated design,IP68 Double-shielded transducer cable Standard/maximum cable length:30ft/1000ft(9m/300m)

Product size

Transmitter size

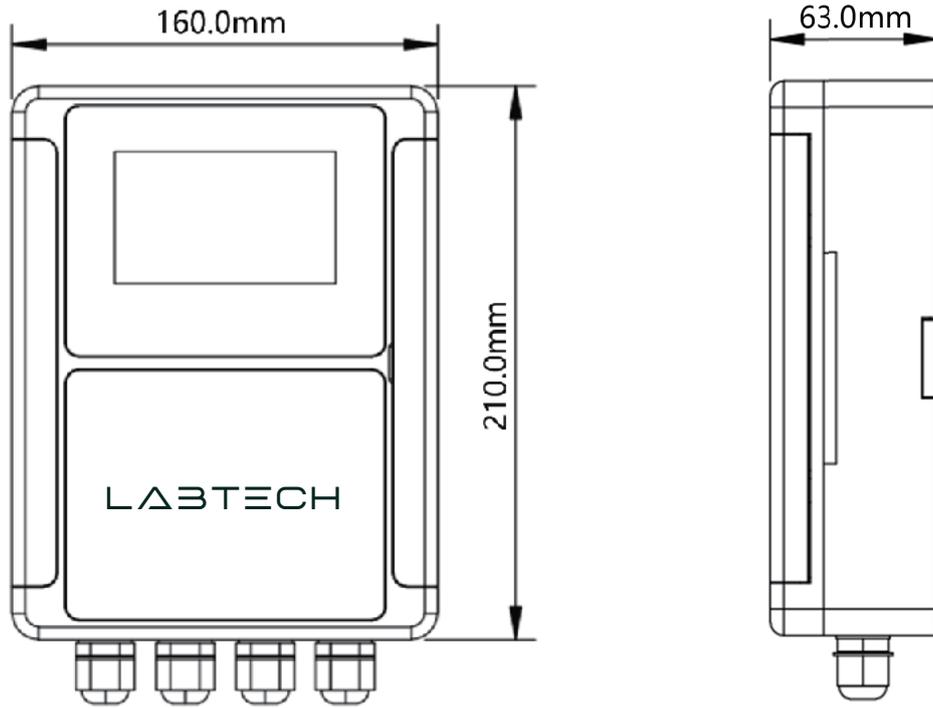


Transducer size

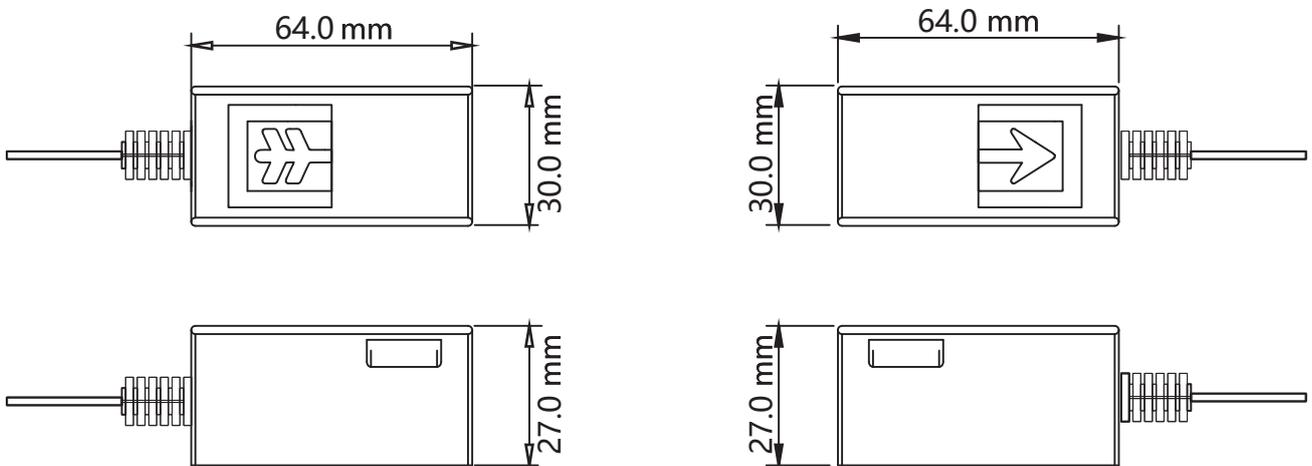


Clamp-on type

Installation site selection

The first condition for ultrasonic flow meter is the pipe must be full of liquid, the bubbles will greatly influence the accuracy of the measurement, please avoid the follow installation position:

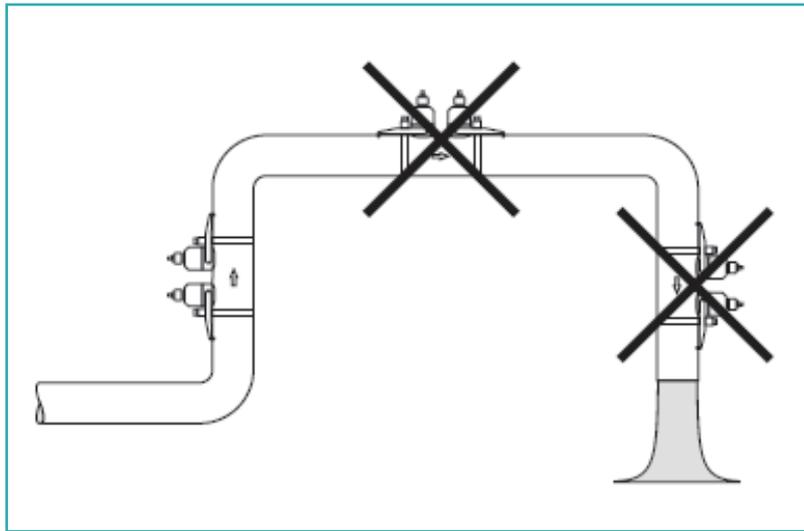


The suggestion installation area is as following:

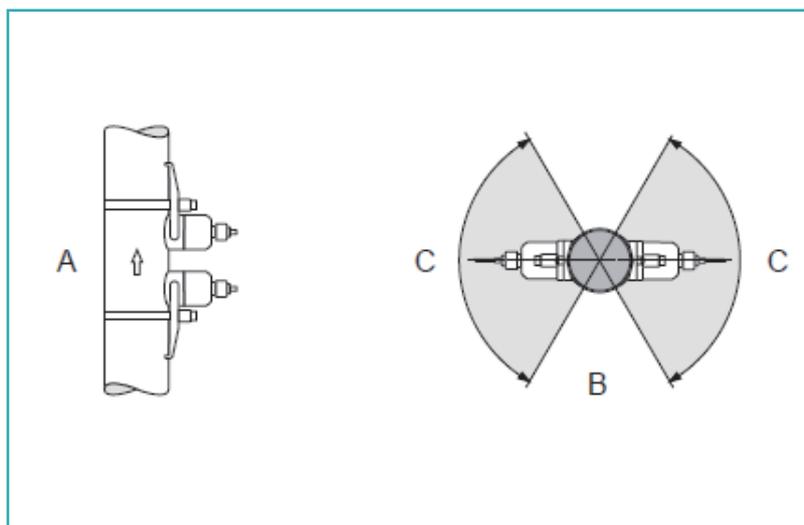

- A is for upright pipeline, please notice the water direction is from the bottom to top.
- B is for horizontal pipeline, the transducers need to be installed inside the C area, angle for area C, max 120°.

Straight pipe demand


We suggest avoiding the valve, T-branchpipe and elbows if the condition allow. Please satisfied the hardest position installation requirements when you face more than one interfering resource.

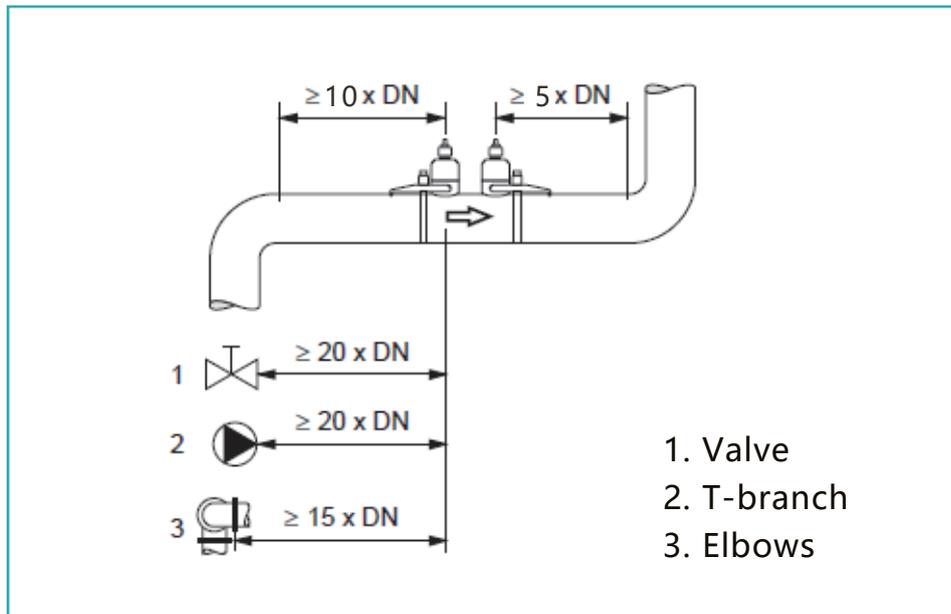

Measuring principle

Transfer time technical means the ultrasonic signal from the transducer is transmitted and received through the moving liquid, there will be a difference between the upstream and downstream transit time, which can be used to calculate flow and velocity.

Clamp-on type

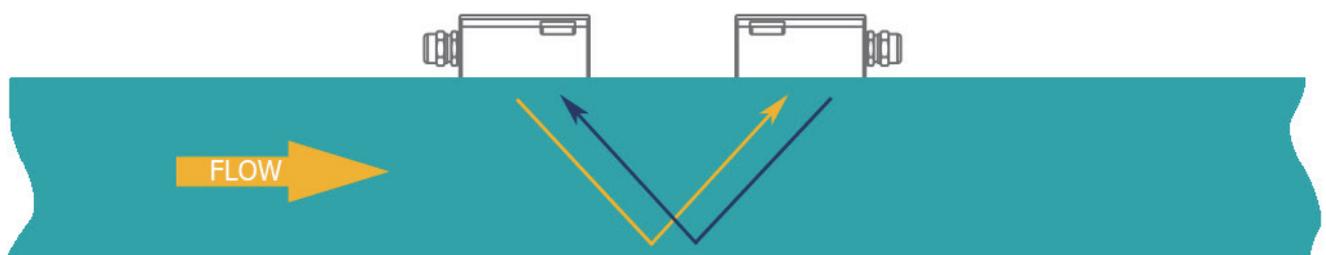

Ordering informations

Model	Transmitter
UltraFlow 5000	Ultrasonic flowmeter Wall mount Flow range: $\pm 0.09\text{ft/s} \sim \pm 39\text{ft/s}$ ($\pm 0.03\text{m/s} \sim \pm 12\text{m/s}$) Accuracy : $\pm 1\%$ of the measure value Repeatability: 0.2% of the measure value Display: 240*128 backlit LCD Power supply: 10~36VDC/AC90~245V Transmitter enclosure: IP65, ABS (Temperature: $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$) Output: OCT pulse output 0-10KHz, Relay output, 4-20mA optional Communication: RS232, Modbus Protocol
Code	Output
1	OCT, Relay, RS232/RS485, 4-20mA
2	OCT, Relay, RS232/RS485, 4-20mA, RTD
Code	Transducer
TT01	Clamp-on, IP68. Operating temperature: $-40^{\circ}\text{F} \sim +176^{\circ}\text{F}$ ($-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$)
TT03	Clamp-on, IP68. Operating temperature: $-40^{\circ}\text{F} \sim +266^{\circ}\text{F}$ ($-40^{\circ}\text{C} \sim +130^{\circ}\text{C}$)
TT05	Insertion, IP68. Operating temperature: $-40^{\circ}\text{F} \sim +266^{\circ}\text{F}$ ($-40^{\circ}\text{C} \sim +130^{\circ}\text{C}$)
XXX	Transducer cable length
030	Standard length 30ft (9m)
XXX	Max length to 1000ft (300m)
Code	Temperature sensor
PT1000	Pt1000 temperature sensor+RTD module(selection)
Code	Memory
SD	SD card(8G)+ SD card module(selection)

*Specifications Subject to change for continuous improvement, Rev:1

Clamp-on type

Standard model: UltraFlow 5000 - 1 - TT01 - 030

Description: Standard ensure clamp-on type ultrasonic flowmeter, OCT, Relay,RS485, 4-20mA, 30ft cable.



CONNECT+
IoT Solution Enabled

Labtech Electronics Private Limited

1/3, Kundrathur High Road, Periyapanicheri
Chennai-600128, TamilNadu, India
sales@labtech.co.in, www.labtech.co.in
+91 9840909211, 044-48605048

